



SAW Components

Data Sheet B9020

Data Sheet

An abstract, grayscale graphic featuring a stylized, three-dimensional representation of the EPCOS logo. The logo is rendered in a glowing, metallic style, with the word "EPCOS" in large, bold, sans-serif letters. The background is dark and textured, with a faint, glowing globe or sphere visible behind the logo.



SAW Components

B9020

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet




Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Very low insertion loss
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transform from 50Ω to 150Ω
- Suitable for GPRS class 1 to 12
- Package for **Surface Mount Technology (SMT)**
- Pb-free

Terminals

- Ni, gold-plated


Chip sized SAW package DCS6T

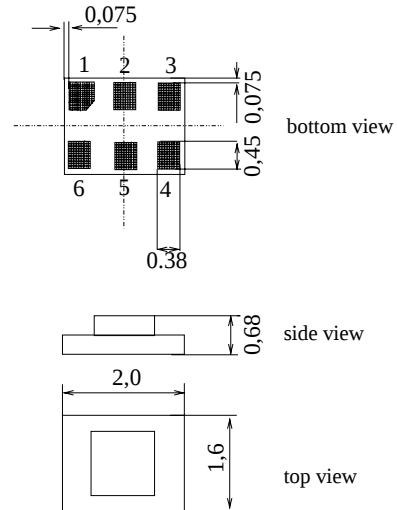

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- | | |
|-------|-------------------|
| 2 | Input, unbalanced |
| 4,6 | Output, balanced |
| 1,3,5 | to be grounded |

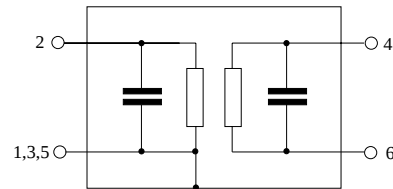

Type	Ordering code	Marking and Package according to	Packing according to
B9020	B39202-B9020-K310	C61157-A7-A128	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	$-30 / +85$	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	$-40 / +85$	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{DC}	50*	V	Machine Model, 10 pulses
Input Power at				
GSM850, GSM900	P_{IN}	15	dBm	peak power of GSM signal,
GSM1800, GSM1900	P_{IN}	12	dBm	duty cycle 4:8
Tx bands				

* acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9020

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = 25^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 150\Omega \parallel 56\text{nH}$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	1,8	2,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	0,7	1,2	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
1930,0 ... 1990,0 MHz		-4	—	5	$^{\circ}$
Output amplitude balance (S_{31} / S_{21})					
1930,0 ... 1990,0 MHz		-1,0	—	1,0	dB
Differential to common mode suppression	S_{sc12}				
1930,0 ... 1990,0 MHz		22,0	26,0	—	dB
Attenuation	α				
DC ... 1510,0 MHz		40	43	—	dB
1510,0 ... 1830,0 MHz		30	35	—	dB
1830,0 ... 1850,0 MHz		28	30	—	dB
1850,0 ... 1890,0 MHz		23	30	—	dB
1890,0 ... 1910,0 MHz		13	14	—	dB
2010,0 ... 2070,0 MHz		13	15	—	dB
2070,0 ... 2400,0 MHz		25	26	—	dB
2400,0 ... 2500,0 MHz		35	42	—	dB
2500,0 ... 3860,0 MHz		28	34	—	dB
3860,0 ... 3980,0 MHz		45	52	—	dB
3980,0 ... 6000,0 MHz		40	52	—	dB



SAW Components

B9020

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -10$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 150\Omega \parallel 56\text{nH}$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,3	2,6	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	1,1	1,6	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,9	2,1	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,9	2,1	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
1930,0 ... 1990,0 MHz		-4	—	5	$^{\circ}$
Output amplitude balance (S_{31} / S_{21})					
1930,0 ... 1990,0 MHz		-1,0	—	1,5	dB
Differential to common mode suppression	S_{sc12}				
1930,0 ... 1990,0 MHz		22,0	26,0	—	dB
Attenuation	α				
DC ... 1510,0 MHz		40	43	—	dB
1510,0 ... 1830,0 MHz		30	35	—	dB
1830,0 ... 1850,0 MHz		28	30	—	dB
1850,0 ... 1890,0 MHz		23	30	—	dB
1890,0 ... 1910,0 MHz		13	14	—	dB
2010,0 ... 2070,0 MHz		13	15	—	dB
2070,0 ... 2400,0 MHz		23	25	—	dB
2400,0 ... 2500,0 MHz		35	42	—	dB
2500,0 ... 3860,0 MHz		28	34	—	dB
3860,0 ... 3980,0 MHz		45	52	—	dB
3980,0 ... 6000,0 MHz		40	52	—	dB



SAW Components

B9020

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -30$ to $+85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 150\Omega \parallel 56\text{nH}$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,4	2,9	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	1,2	1,7	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,9	2,1	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,9	2,2	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
1930,0 ... 1990,0 MHz		-4	—	5	$^{\circ}$
Output amplitude balance (S_{31}/S_{21})					
1930,0 ... 1990,0 MHz		-1,0	—	1,5	dB
Differential to common mode suppression	S_{sc12}				
1930,0 ... 1990,0 MHz		22,0	26,0	—	dB
Attenuation	α				
DC ... 1510,0 MHz		40	43	—	dB
1510,0 ... 1830,0 MHz		30	35	—	dB
1830,0 ... 1850,0 MHz		28	30	—	dB
1850,0 ... 1890,0 MHz		23	30	—	dB
1890,0 ... 1910,0 MHz		12	14	—	dB
2010,0 ... 2070,0 MHz		10	12	—	dB
2070,0 ... 2400,0 MHz		22	24	—	dB
2400,0 ... 2500,0 MHz		35	42	—	dB
2500,0 ... 3860,0 MHz		28	34	—	dB
3860,0 ... 3980,0 MHz		45	52	—	dB
3980,0 ... 6000,0 MHz		40	52	—	dB



SAW Components

B9020


Low-Loss Filter for Mobile Communication

1960,0 MHz


Data Sheet



Transfer function (T=-10 to +80°C)(narrow band)

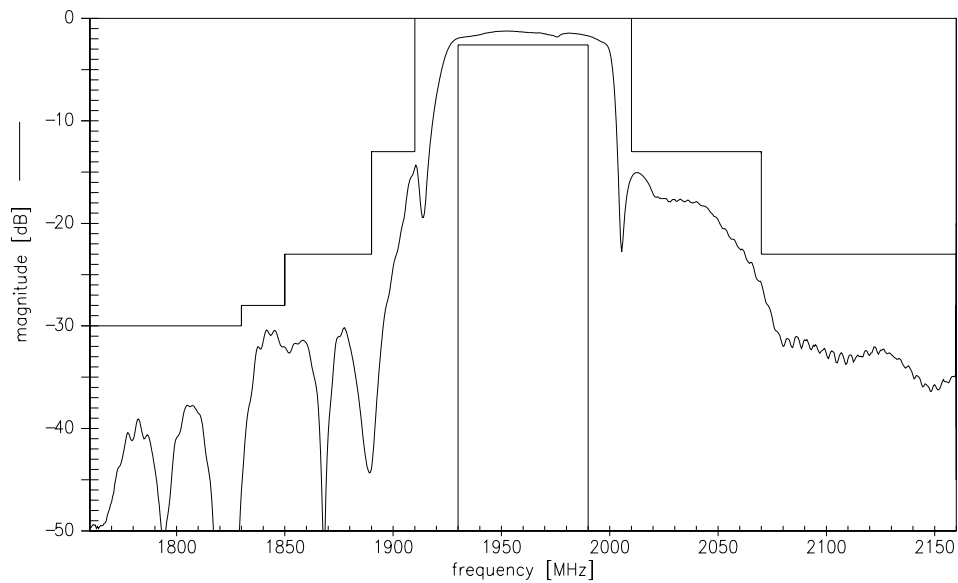

Transfer function (wide band)

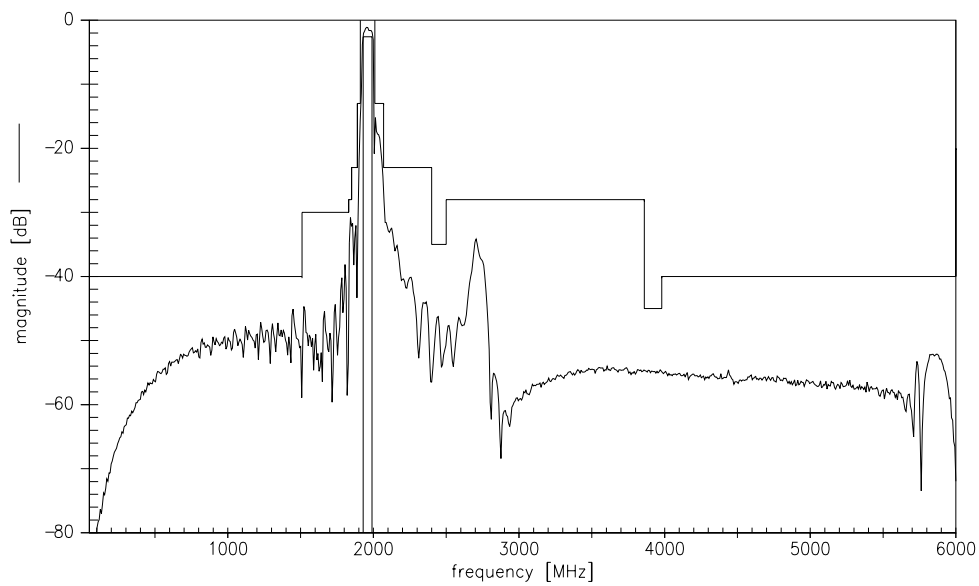



SAW Components	B9020
Low-Loss Filter for Mobile Communication	1960,0 MHz
Data Sheet	SMD

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC WT
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.