


DELPHI SERIES

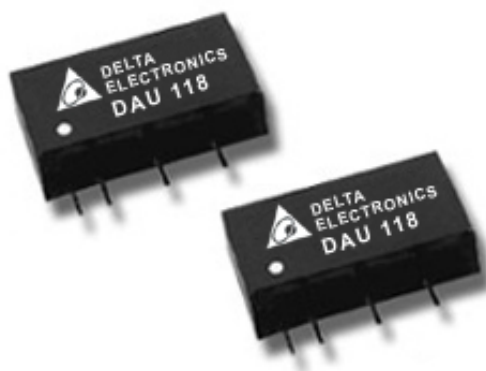

FEATURES

- Efficiency up to 81%
- Industry standard form factor and pinout
- Size: 19.5x6.1x10.2mm (0.77"x0.24"x0.40")
- Input: 5V, 12V, 15V, 24V ($\pm 10\%$)
- Output: 3.3, 5, 9, 12, 15, ± 5 , ± 9 , ± 12 , ± 15 V
- Low ripple and noise
- 1000V isolation
- UL 94V-0 Package Material
- ISO 9001 and ISO 14001 certified manufacturing facility

Delphi DAU100 Series DC/DC Power Modules: 5, 12, 15, 24Vin, 1W SIP

The Delphi DAU100, 5V, 12V, 15V, and 24V input, single or dual output, SIP form factor, isolated DC/DC converter is the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. The DAU100 series operate from 5V, 12V, 15V, or 24V ($\pm 10\%$) and provides 3.3V, 5V, 9V, 12V, or 15V of single output or ± 5 V, ± 9 V, ± 12 V, or ± 15 V of dual output in an industrial standard, plastic case encapsulated SIP package. This series provides up to 1W of output power with 1000V isolation and a typical full-load efficiency up to 81%. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions.

OPTIONS

APPLICATIONS

- Industrial
- Transportation
- Process/ Automation

TECHNICAL SPECIFICATIONS

T_A = 25°C, airflow rate = 0 LFM, nominal Vin, nominal Vout, resistive load unless otherwise noted.

PARAMETER	NOTES and CONDITIONS	DAU100 (Standard)			
		Min.	Typ.	Max.	Units
ABSOLUTE MAXIMUM RATINGS					
Input Voltage					
Transient	5V input model, 1000ms	-0.7		9	Vdc
Transient	12V & 15V input model, 1000ms	-0.7		18	Vdc
Transient	24V input model, 1000ms	-0.7		30	
Internal Power Dissipation				450	mW
Operating Temperature	Ambient	-40		85	°C
	Case	-40		100	°C
Storage Temperature		-40		125	°C
Humidity				95	%
Lead Temperature in Assembly	1.5mm from case for 10 seconds			260	°C
Input/Output Isolation Voltage		1000			Vdc
INPUT CHARACTERISTICS					
Operating Input Voltage	5V input model	4.5	5	5.5	Vdc
	12V input model	10.8	12	13.2	Vdc
	15V input model	13.5	15	16.5	
	24V input model	21.6	24	26.4	Vdc
Maximum Input Current	Please see Model List table on page 6				
No-Load Input Current	5V model		30		mA
	12V model		12		mA
	15V model		11		mA
	24V model		7		mA
Reverse Polarity Input Current				0.3	A
OUTPUT CHARACTERISTICS					
Output Voltage Set Point Accuracy			±1.0	±3.0	%
Output Voltage Balance	Dual output models		±0.1	±1.0	%
Output Voltage Regulation					
Over Load	Io=20% to 100%, please see page 6				
Over Line	For Vin change of 1%		±1.2	±1.5	%
Over Temperature	Tc=-40°C to 100°C		±0.01	±0.02	%/C
Output Voltage Ripple and Noise	5Hz to 20MHz bandwidth				
Peak-to-Peak	Full Load, 0.33µF ceramic		50	75	mV
Peak-to-Peak, over line, load, temperature	Full Load, 0.33µF ceramic			150	mV
RMS	Full Load, 0.33µF ceramic			5	mV
Output Short Circuit				0.5	Second
Maximum Output Capacitance	Single output models			220	µF
	Dual output models, each output			100	µF
EFFICIENCY					
100% Load	Please see Model List table on page 6				
ISOLATION CHARACTERISTICS					
Isolation Voltage	Input to output, 60 Seconds	1000			Vdc
Isolation Voltage Test	Flash Test for 1 seconds	1100			Vdc
Isolation Resistance	500VDC	1000			MΩ
Isolation Capacitance	100KHz, 1V		60	100	pF
FEATURE CHARACTERISTICS					
Switching Frequency		70	100	120	KHz
GENERAL SPECIFICATIONS					
MTBF	MIL-HDBK-217F; Ta=25°C, Ground Benign	2			M hours
Weight	5V and 12V models		2.2		grams
	15V and 24V models		2.6		grams
Case Material	Non-conductive black plastic				
Flammability	UL94V-0				
Input Fuse	5V model, 500mA slow blown type				
	12V model, 200mA slow blown type				
	15V model, 150mA slow blown type				
	24V model, 100mA slow blown type				

Notes:

1. These power converters require a minimum output load to maintain specified regulation (please see page 6 for the suggested minimum load). Operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed above.
2. These DC/DC converters should be externally fused at the front end for protection.



ELECTRICAL CHARACTERISTICS CURVES

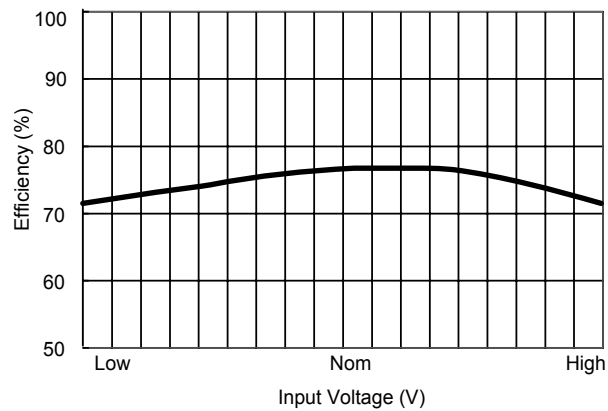


Figure 1: Efficiency vs. Input Voltage (Single Output)

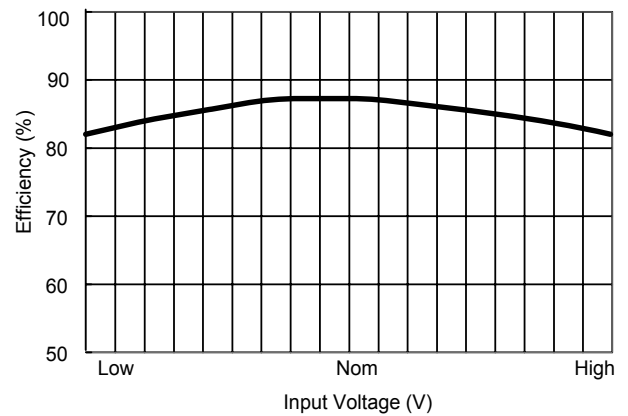


Figure 2: Efficiency vs. Input Voltage (Dual Output)

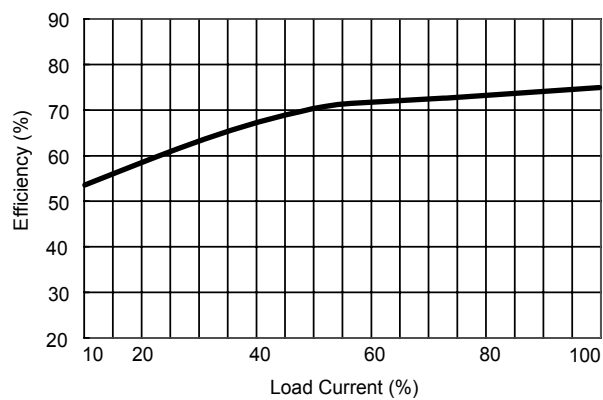


Figure 3: Efficiency vs. Output Load (Single Output)

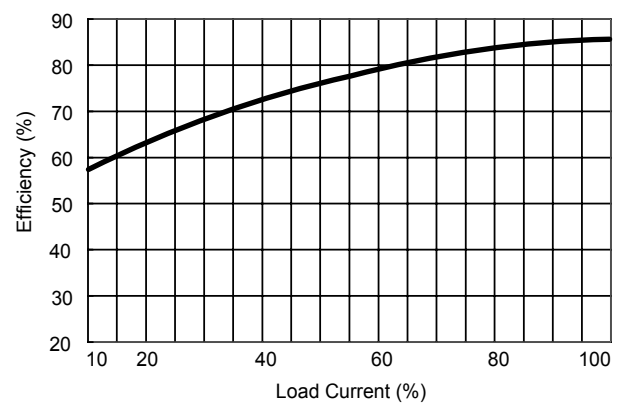


Figure 4: Efficiency vs. Output Load (Dual Output)

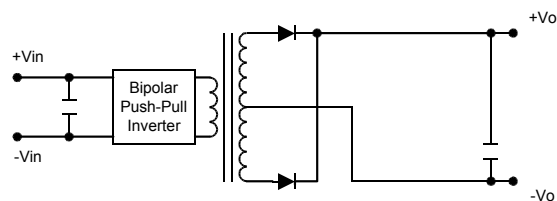


Figure 5: Block diagram of DAU100 single output modules.

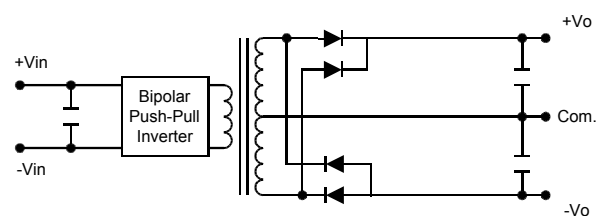




Figure 6: Block diagram of DAU100 dual output modules.

Design & Feature Considerations

The DAU100 circuit block diagrams are shown in Figures 5 and 6.


Peak-to-Peak Output Noise Measurement

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter. A C_{out} of 0.33 μ F ceramic capacitor is placed between the terminals shown below.

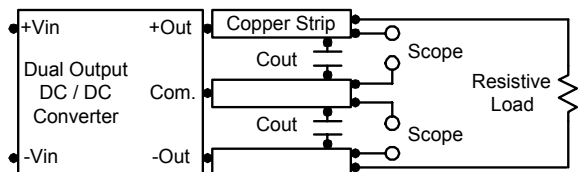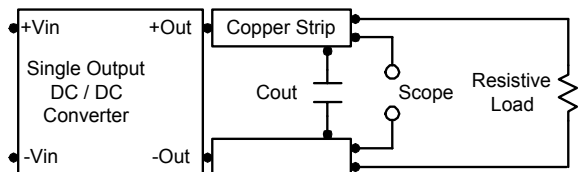

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

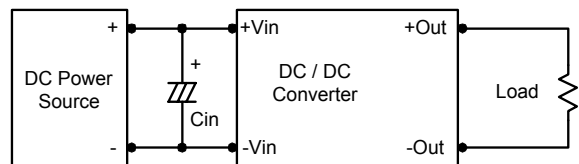

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the input of the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 KHz) capacitor of a 2.2 μ F for the 5V input devices, a 1.0 μ F for the 12V and 15V input devices, and a 0.47 μ F for the 24V devices.



Maximum Capacitive Load

The DAU100 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100 μ F maximum capacitive load for dual outputs and 220 μ F capacitive load for single outputs.

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance.

To reduce output ripple, it is recommended to use 1.0 μ F capacitors at the output.

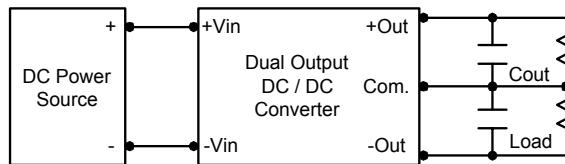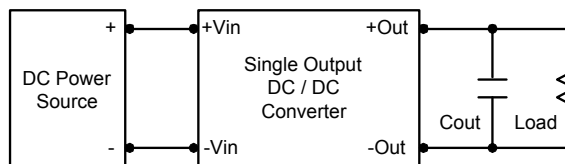

Soldering and Cleaning Considerations

Post solder cleaning is usually the final board assembly process before the board or system undergoes electrical testing. Inadequate cleaning and/or drying may lower the reliability of a power module and severely affect the finished circuit board assembly test. Adequate cleaning and/or drying is especially important for un-encapsulated and/or open frame type power modules. For assistance on appropriate soldering and cleaning procedures, please contact Delta's technical support team.



THERMAL CONSIDERATIONS


Thermal management is an important part of the system design. To ensure proper, reliable operation, sufficient cooling of the power module is needed over the entire temperature range of the module. Convection cooling is usually the dominant mode of heat transfer.

Hence, the choice of equipment to characterize the thermal performance of the power module is a wind tunnel.

Thermal Testing Setup

Delta's DC/DC power modules are characterized in heated vertical wind tunnels that simulate the thermal environments encountered in most electronics equipment. This type of equipment commonly uses vertically mounted circuit cards in cabinet racks in which the power modules are mounted.

The following figure shows the wind tunnel characterization setup. The power module is mounted on a test PWB and is vertically positioned within the wind tunnel. The space between the facing PWB and PWB is constantly kept at 25.4mm (1").

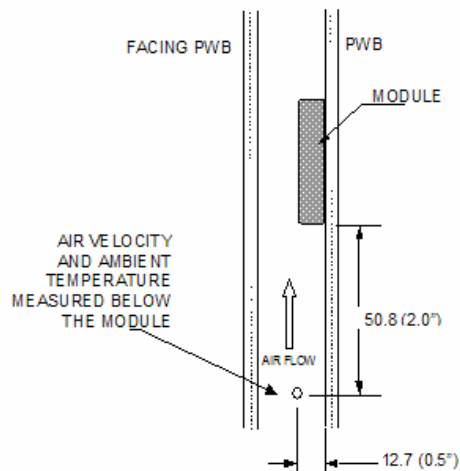

Note: Wind Tunnel Test Setup Figure Dimensions are in millimeters and (Inches)

Figure 7: Wind tunnel test setup

Thermal Derating

Heat can be removed by increasing airflow over the module. To enhance system reliability, the power module should always be operated below the maximum operating temperature. If the temperature exceeds the maximum module temperature, reliability of the unit may be affected.

THERMAL CURVES

DAU100series Output Current vs. Ambient Temperature and Air Velocity
(Either Orientation)

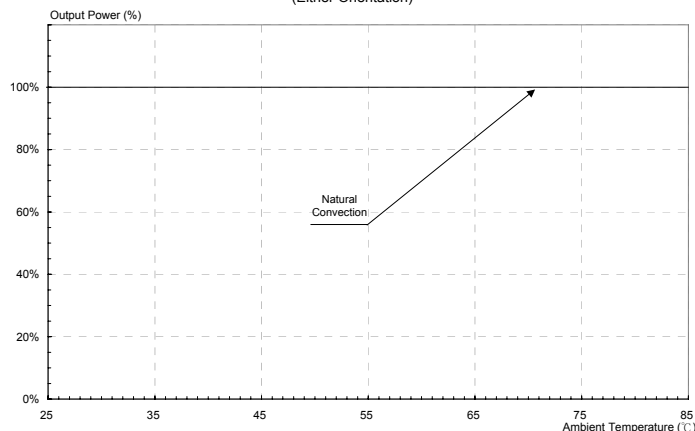


Figure 8: Derating Curve




MODEL LIST




	INPUT		OUTPUT			Full Load Efficiency	Load Regulation
	Vdc (V)	I _{max} (mA)	Vdc (V)	I _{max} (mA)	I _{min} (mA)	%	%
DAU101	5 (4.5 ~ 5.5)	235	3.3	260	5	73	10
DAU102		281	5	200	4	71	10
DAU103		260	9	110	2	76	8
DAU104		258	12	84	1.5	78	7
DAU105		258	15	67	1	78	7
DAU106		278	±5	±100	±2	72	10
DAU107		262	±9	±56	±1	77	8
DAU108		258	±12	±42	±0.8	78	7
DAU109		258	±15	±34	±0.7	79	7
DAU110		258	±15	±34	±0.7	79	7
DAU111	12 (10.8 ~ 13.2)	96	3.3	260	5	74	8
DAU112		114	5	200	4	73	8
DAU113		106	9	110	2	78	5
DAU114		105	12	84	1.5	80	5
DAU115		104	15	67	1	80	5
DAU116		113	±5	±100	±2	74	8
DAU117		106	±9	±56	±1	79	5
DAU118		104	±12	±42	±0.8	81	5
DAU119		105	±15	±34	±0.7	81	5
DAU120		105	±15	±34	±0.7	81	5
DAU151	15 (13.5 ~ 16.5)	93	5	200	4	72	8
DAU152		85	12	84	1.5	79	5
DAU153		85	15	67	1	79	5
DAU154		93	±5	±100	±2	72	8
DAU155		85	±12	±42	±0.8	80	5
DAU156		85	±15	±34	±0.7	80	5
DAU121	24 (21.6 ~ 26.4)	49	3.3	260	5	73	8
DAU122		59	5	200	4	71	8
DAU123		54	9	110	2	76	5
DAU124		54	12	84	1.5	78	5
DAU125		53	15	67	1	79	5
DAU126		58	±5	±100	±2	72	8
DAU127		55	±9	±56	±1	76	5
DAU128		53	±12	±42	±0.8	79	5
DAU129		53	±15	±34	±0.7	80	5
DAU130		53	±15	±34	±0.7	80	5

MECHANICAL DRAWING

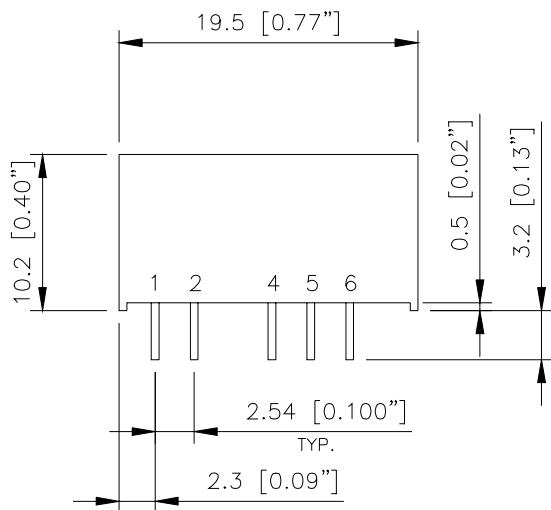

SIDE VIEW

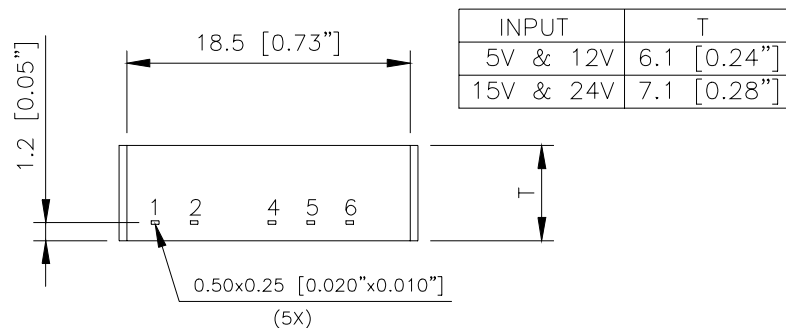

BOTTOM VIEW

PIN#	SINGLE	DUAL
1	Vin(+)	Vin(+)
2	Vin(-)	Vin(-)
4	Vout(-)	Vout(-)
5	No PIN	COMMON
6	Vout(+)	Vout(+)

Notes:

Dimensions are in millimeters and inches

Tolerance: X.X \pm 0.25mm (X.XX \pm 0.01 in)

X.XX \pm 0.13mm (X.XXX \pm 0.005 in)

Pin diameter \pm 0.05mm (\pm 0.002 in)

CONTACT: www.delta.com.tw/dc dc

USA:

Telephone:
East Coast: (888) 335 8201
West Coast: (888) 335 8208
Fax: (978) 656 3964
Email: DCDC@delta-corp.com

Europe:

Phone: +41 31 998 53 11
Fax: +41 31 998 53 53
Email: DCDC@delta-es.com

Asia & the rest of world:

Telephone: +886 3 4526107 ext 6220
Fax: +886 3 4513485
Email: DCDC@delta.com.tw

WARRANTY

Delta offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta. Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.