

# NAIS

## GU (General Use) Type 1-Channel (Form A) Current Limit Function 6-Pin Type

# PhotoMOS RELAYS

### FEATURES

#### 1. Current Limit Function

To control an over current from flowing, the current limit function has been realized. It keeps an output current at a constant value when the current reaches a specified current limit value.

#### 2. Enhancing the capability of surge resistance between output terminals

The current limit function controls the ON time surge current to enhance the capability of surge resistance between output terminals.

#### 3. Reinforced insulation 5,000 V type

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

#### 4. Compact 6-pin DIP size


The device comes in a compact (W)6.4 × (L)8.8 × (H) 3.9mm (W).252 × (L).346 × (H).154inch, 6-pin DIP size

#### 5. Controls low-level analog signals


PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

#### 6. High sensitivity, low ON resistance

#### 7. Low-level off state leakage current

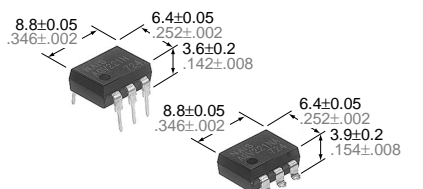

mm inch



### TYPICAL APPLICATIONS

- Telephone equipment
- Modem

### TYPES

Type	I/O isolation voltage	Output rating*		Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal				
		Load voltage	Load current	Tube packing style	Tape and reel packing style		Tube	Tape and reel	
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC type	Reinforced 5,000 V	350 V	130 mA	AQV210HL	AQV210HLA	AQV210HLAX	AQV210HLAZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

### RATING

#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQV210HL(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA	
	LED reverse voltage	V <sub>R</sub>	3 V	
	Peak forward current	I <sub>FP</sub>	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW	
Output	Load voltage (peak AC)	V <sub>L</sub>	350 V	
	Continuous load current	I <sub>L</sub>	0.13 A	
	Power dissipation	P <sub>out</sub>	500 mW	
Total power dissipation		P <sub>T</sub>	550 mW	
I/O isolation voltage		V <sub>iso</sub>	5,000 V AC	
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F	Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	−40°C to +100°C −40°F to +212°F	

# AQV210HL


## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQV210HL(A)	Condition
Input	LED operate current	Typical	$I_{Fon}$	1.6 mA	$I_L = \text{Max.}$
		Maximum		3.0 mA	
	LED turn off current	Minimum	$I_{Foff}$	0.4 mA	$I_L = \text{Max.}$
		Typical		1.5 mA	
	LED dropout voltage	Minimum	$V_F$	1.14 (1.25 V at $I_F = 50\text{mA}$ )	$I_F = 5 \text{ mA}$
		Typical		1.5 V	
Output	On resistance	Typical	$R_{on}$	20Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
		Maximum		25Ω	
	Off state leakage current	Maximum	$I_{Leak}$	1μA	$I_F = 0$ $V_L = \text{Max.}$
Transfer characteristics	Current limit	Typical	—	180 mA	$I_F = 5 \text{ mA}$
	Turn on time*	Typical	$T_{on}$	0.8 ms	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum		2.0 ms	
	Turn off time*	Typical	$T_{off}$	0.05 ms	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum		1.0 ms	
	I/O capacitance	Typical	$C_{iso}$	0.8 pF	$f = 1 \text{ MHz}$ $V_B = 0$
		Maximum		1.5 pF	
	Initial I/O isolation resistance	Minimum	$R_{iso}$	1,000 MΩ	500 V DC

Note: Recommendable LED forward current  $I_F \approx 5$  to 10 mA.

For type of connection, see Page 31.


### \*Turn on/Turn off time

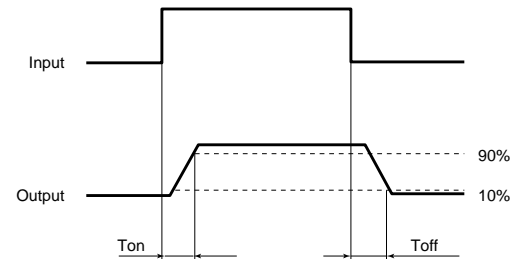

## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

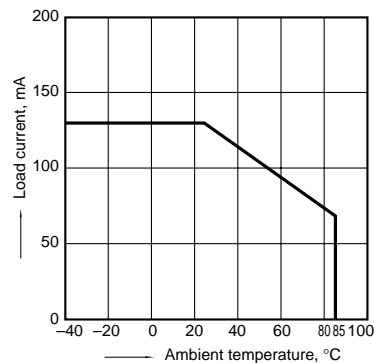


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
LED current: 5 mA; Load voltage: Max. (DC)  
Continuous load current: Max.(DC)

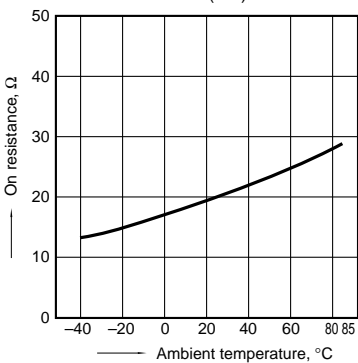


### 3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max.(DC);  
Continuous load current: Max.(DC)

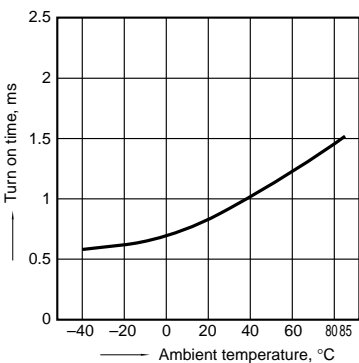


## 4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max.(DC);  
Continuous load current: Max.(DC)

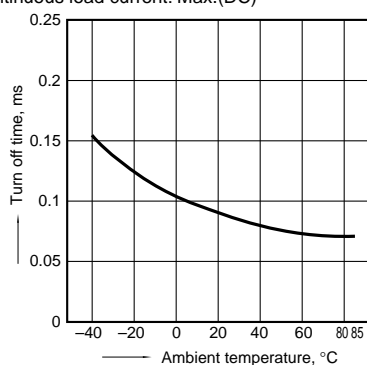


## 5. LED operate current vs. ambient temperature characteristics

Load voltage: Max.(DC);  
Continuous load current: Max.(DC)

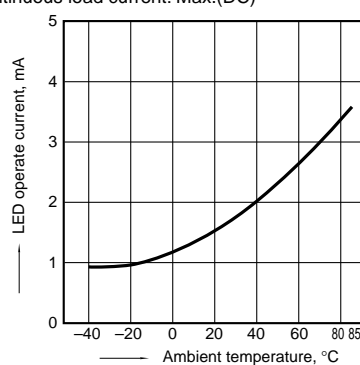


## 6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max.(DC);  
Continuous load current: Max.(DC)

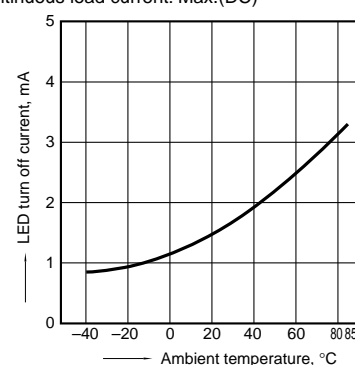


## 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

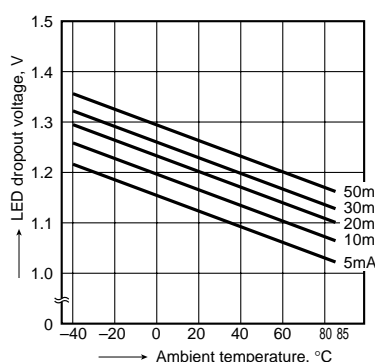


## 8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F




## 9. Off state leakage current

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

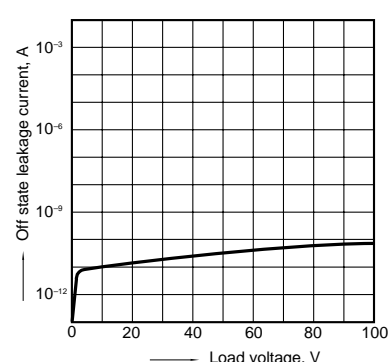


## 10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

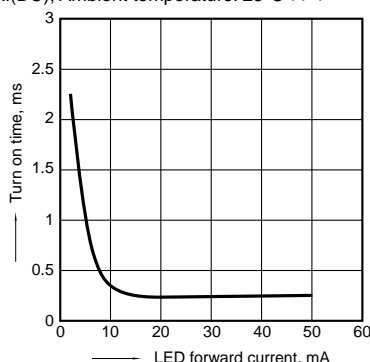


## 11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

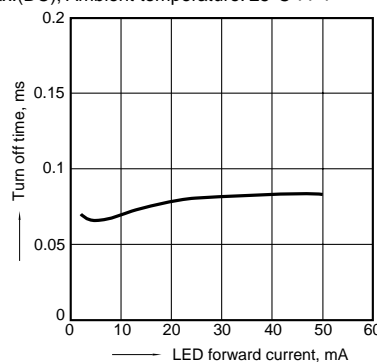

## 12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

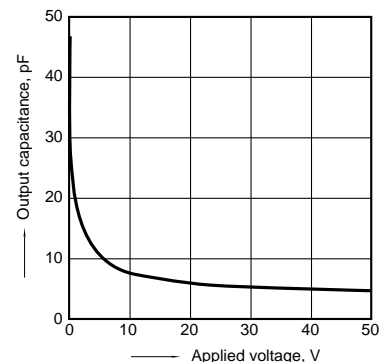

## What is current limit

When a load current reaches the specified output control current, a current limit function works against the load current to keep the current a constant value. The current limit circuit built into the PhotoMOS relay thus controls the instantaneous load current to effectively ensure circuit safety.

This safety feature protects circuits down-

stream of the PhotoMOS relay against over-current.

But, if the current-limiting feature is used longer than the specified time, the PhotoMOS relay can be destroyed. Therefore, set the output loss to the max. rate or less.

- Comparison of output voltage and output current characteristics

## V-I Characteristics

