
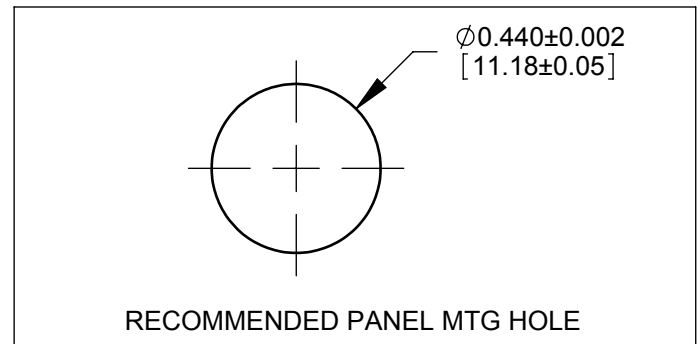
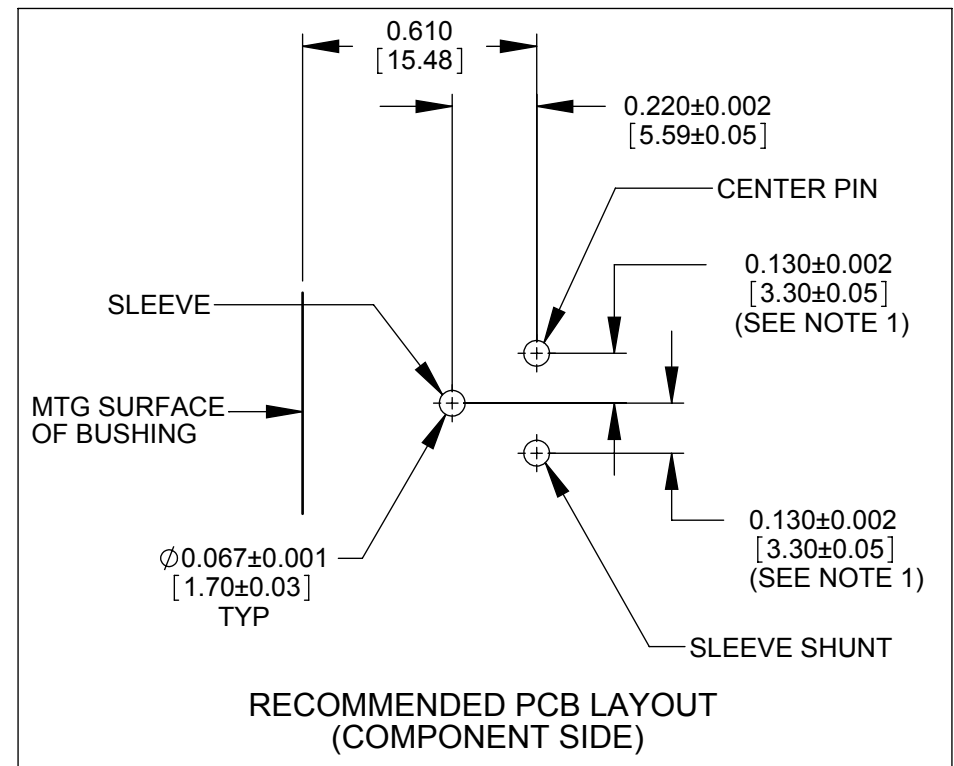
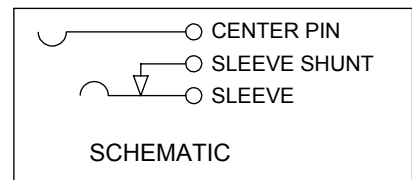
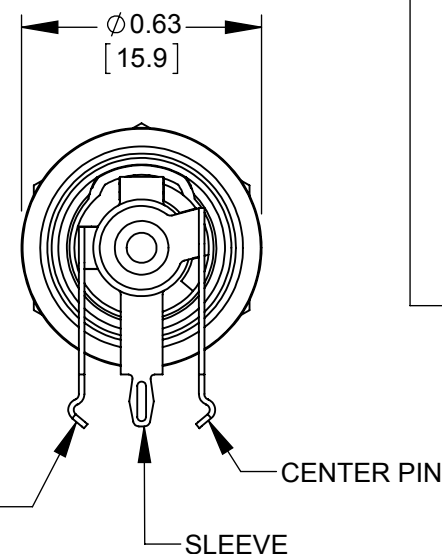
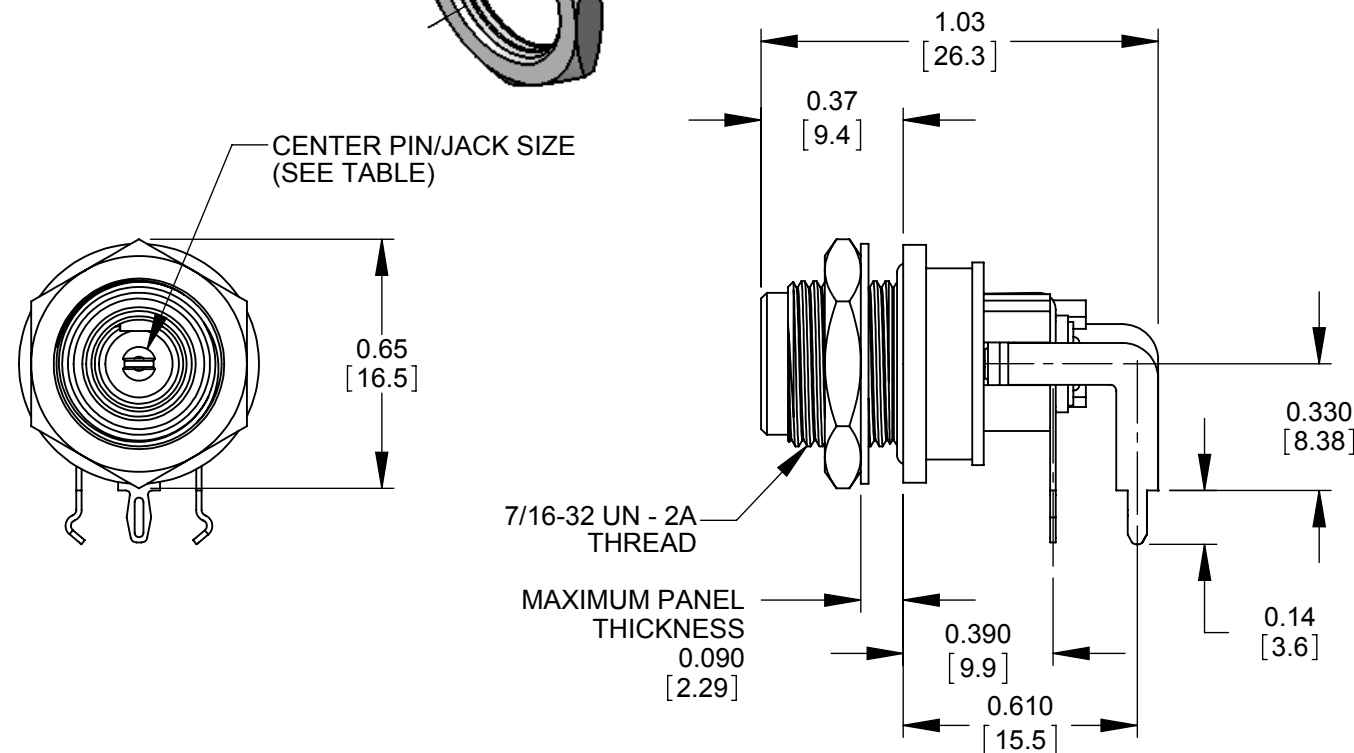


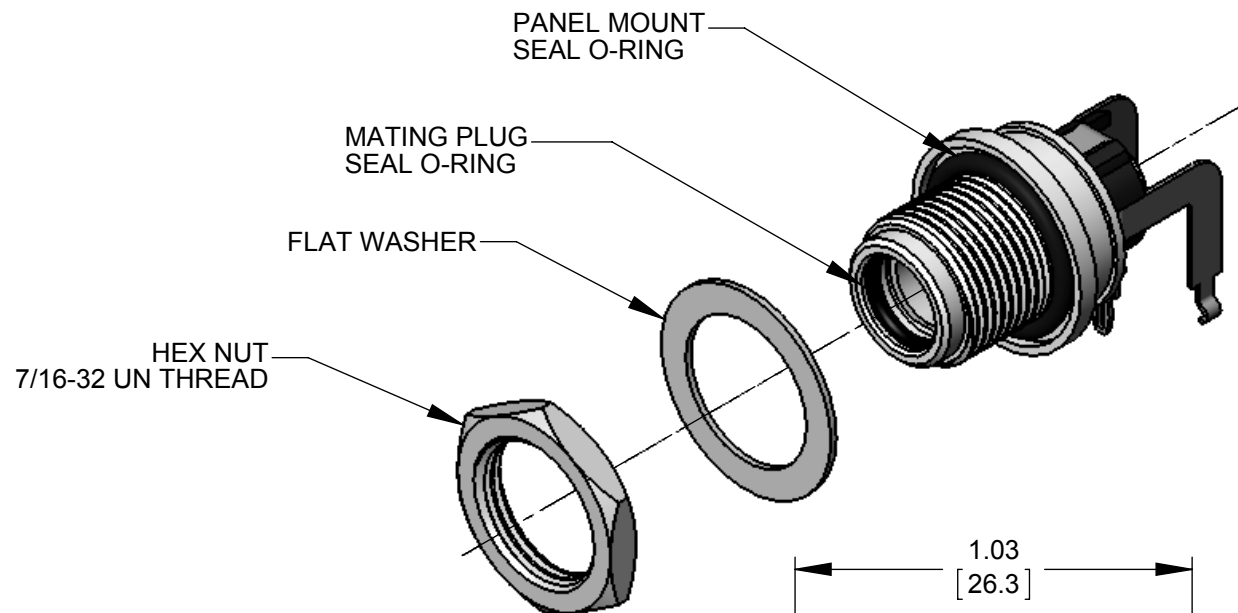

NOTES:

1. FOR HAND INSERTION USE SPACING 0.130 [3.30]
FOR AUTOMATED INSERTION USE SPACING 0.135 [3.43]
2. DIMENSIONS SHOWN FOR REFERENCE ONLY.
3. HEX NUT, FLAT WASHER, AND PANEL O-RING SUPPLIED UNASSEMBLED
4. MATERIAL:
HOUSINGS, HEX NUT - COPPER ALLOY, NICKEL PLATED
INSULATOR HOUSING - THERMOPLASTIC
O-RINGS - NEOPRENE RUBBER, LUBRICATED WITH SYNTHETIC GREASE
TERMINAL INSULATORS - PHENOLIC
FLAT WASHER - STEEL, NICKEL PLATED
PIN, SPRING, TERMINALS - COPPER ALLOY, SILVER PLATED
5. THIS PRODUCT IS RoHS COMPLIANT

REV	ECO NUMBER	DATE	BY	APVD
B	27029	10/01/12	BL	TJK
A	26591	8/6/10	RS	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED	
1. ALL DIMENSIONS IN INCHES	
- TWO PLACE DECIMALS ±0.02	
- THREE PLACE DECIMALS ±0.005	
DO NOT SCALE DRAWING	

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
SIZE		WIDTH		MULT		LBS/M		TEMPER		
FINISH SPEC No.					MATERIAL SPEC No.					
FIRST USED ON			SCALE 2:1		Switchcraft®					
DATE DRAWN	BY	CHKD	APVD							
7/23/09	PNK	RS	TJK		SHEET 1 OF 1					
NAME		SEALED POWER JACKS RIGHT ANGLE PC, RoHS			PART No. L712RAS, L722RAS				REV B	