


# THT Power Inductors

Toroid - Bare Coil Series

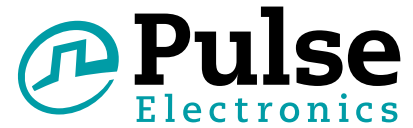

-  Low cost solutions for VRM, Game Console and Consumer applications
-  **Current Range:** up to 48A
-  **Inductance Range:** 5 $\mu$ H to 12 $\mu$ H
-  **Frequency Range:** up to 1MHz
-  Custom configurations are possible

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

| Part*<br>Number | Reference Data                           |                 |                        |                                             | Build                                  | Design Calculation Data |     |         |     |     |    |
|-----------------|------------------------------------------|-----------------|------------------------|---------------------------------------------|----------------------------------------|-------------------------|-----|---------|-----|-----|----|
|                 | Inductance<br>@ Irated<br>( $\mu$ H TYP) | Irated 2<br>(A) | DCR<br>m $\Omega$ MAX) | Inductance<br>@0ADC<br>( $\mu$ H $\pm$ 20%) |                                        | H1                      | K1  | K2      | K3  | K4  | K5 |
| PG0122NL        | 0.48                                     | 30.5            | 2.0                    | 0.60                                        | Material 18<br>T60-18<br>3x18GA,4T     | 1.3                     | 134 | 8.2E-03 | 1.2 | 2.3 | 47 |
| PG0123NL        | 0.49                                     | 48.0            | 0.85                   | 0.86                                        | Material 18<br>T60-18<br>3x17GA,5T     | 1.7                     | 107 | 8.2E-03 | 1.2 | 2.3 | 47 |
| PA0690NL        | 0.50                                     | 22.5            | 1.5                    | 0.88                                        | Material 52<br>T44-52<br>1x16GA,5T     | 2.4                     | 202 | 3.1E-03 | 1.3 | 2.1 | 80 |
| PA0235NL        | 0.67                                     | 22.5            | 2.6                    | 0.86                                        | Material 8/90<br>T50-8/90<br>1x17GA,7T | 2.8                     | 128 | 6.4E-03 | 1.1 | 2.4 | 64 |
| PA0689NL        | 0.80                                     | 21.5            | 2.0                    | 1.70                                        | Material 52<br>T44-52<br>1x16GA,7T     | 3.3                     | 144 | 3.1E-03 | 1.3 | 2.1 | 80 |
| PA0430NL        | 0.86                                     | 37.5            | 1.6                    | 1.96                                        | Material 52<br>T68-52<br>2x16GA,7T     | 2.1                     | 80  | 8.8E-03 | 1.3 | 2.1 | 42 |
| P1967LNL        | 0.93                                     | 23.8            | 3.8                    | 1.44                                        | Material 52<br>T68-52<br>1x16GA,6T     | 1.8                     | 93  | 8.8E-03 | 1.3 | 2.1 | 42 |
| PG0116NL        | 1.02                                     | 14.9            | 4.2                    | 1.70                                        | Material 52<br>T44-52<br>1x18GA,7T     | 3.3                     | 144 | 3.1E-03 | 1.3 | 2.1 | 80 |
| PA0489LNL       | 1.05                                     | 19.0            | 2.7                    | 2.24                                        | Material 52<br>T44-52<br>1x16GA,8T     | 3.8                     | 126 | 3.1E-03 | 1.3 | 2.1 | 80 |
| PG0112NL        | 1.10                                     | 13.8            | 7.0                    | 2.50                                        | Material 52<br>T50-52<br>3x22GA,9T     | 3.6                     | 99  | 4.2E-03 | 1.3 | 2.1 | 64 |
| P1715LNL        | 1.81                                     | 14.3            | 5.0                    | 3.50                                        | Material 52<br>T44-52<br>1x17GA,10T    | 4.7                     | 101 | 3.1E-03 | 1.3 | 2.1 | 80 |
| PA0431LNL       | 3.22                                     | 20.5            | 5.5                    | 7.80                                        | Material 52<br>T68-52<br>1x16GA,14T    | 4.2                     | 40  | 8.8E-03 | 1.3 | 2.1 | 42 |
| PA0432LNL       | 5.00                                     | 20.5            | 7.5                    | 12.10                                       | Material 52<br>T80-52<br>1x16GA,17T    | 4.2                     | 25  | 1.4E-02 | 1.3 | 2.1 | 32 |

**\*NOTE:** The "NL" suffix indicates a RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

## Notes from Tables

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The rated current is the current that will cause the temperature of the part to increase by 40°C with 3.6 volt \* μsec across the component and 100LFM of forced air cooling.
3. To determine the inductance of a component at a different operating current, use the graph below for the appropriate material type.
4. In high volt-μsec applications additional heating may occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total losses (or temperature rise) of the component in particular applications, the following formulas can be used.

### Estimated Temperature Rise:

$$Trise = AirFlowFactor * K5 * (Coreloss(W) + Copperloss(W))^{.833} (C)$$

Where

AirFlowFactor = 1 (no air flow), 0.53 (100LFM), 0.39 (200LFM), 0.35 (300LFM), 0.30 (400LFM)

$$CopperLoss = Irms^2 * DCR\_Typical (m\Omega) / 1000$$

$$DCR\_Typical (mW) = .85 * DCR\_Max(from table)$$


$$CoreLoss = K2 * (Freq\_kHz)^{K3} * (\Delta B/2000)^{K4}$$

$$\Delta B = K1 * Volt-\mu sec$$


## Dimensions (in/mm)

| Part No. | A              | B             | C             | D            | E            | F            |
|----------|----------------|---------------|---------------|--------------|--------------|--------------|
| PG0122   | .807<br>20,50  | .374<br>9,50  | .748<br>19,00 | .126<br>3,20 | .098<br>2,50 | .354<br>9,00 |
| PG0123   | .807w<br>20,50 | .413<br>10,50 | .748<br>19,00 | .126<br>3,20 | .106<br>2,68 | .354<br>9,00 |
| PA0690   | .625<br>15,90  | .345<br>8,80  | .545<br>13,80 | .129<br>3,30 | .052<br>1,30 | .300<br>7,60 |
| PA0235L  | N/A            | .400<br>10,20 | .660<br>16,80 | .150<br>3,80 | .050<br>1,30 | .300<br>7,60 |
| PA0689   | .625<br>15,90  | .345<br>8,80  | .545<br>13,80 | .129<br>3,30 | .052<br>1,30 | .300<br>7,60 |
| PA0430L  | .874<br>22,20  | .374<br>9,50  | N/A           | .250<br>6,40 | N/A          | .245<br>6,20 |
| P1967L   | .906<br>23,00  | .492<br>12,50 | .906<br>23,00 | .130<br>3,30 | .055<br>1,40 | .300<br>7,60 |
| PG0116   | .571<br>14,50  | .276<br>7,00  | .571<br>14,50 | .126<br>3,20 | .041<br>1,05 | .276<br>7,00 |
| PA0489L  | .604<br>15,30  | .323<br>8,20  | .556<br>14,10 | .157<br>4,00 | .048<br>1,20 | .250<br>6,40 |
| PG0112   | .630<br>16,00  | .374<br>9,50  | .630<br>16,00 | .140<br>3,60 | .063<br>1,60 | .295<br>7,50 |
| P1715L   | .610<br>15,50  | .325<br>8,30  | N/A           | .130<br>3,30 | .045<br>1,10 | .300<br>7,60 |
| PA0431L  | .874<br>22,20  | .374<br>9,50  | N/A           | .250<br>6,40 | .054<br>1,40 | .240<br>6,10 |
| PA0432L  | .980<br>24,90  | .440<br>11,20 | .980<br>24,90 | .250<br>6,40 | .054<br>1,40 | .310<br>7,90 |

## Mechanical

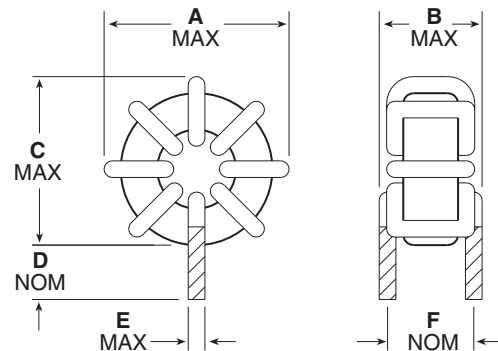

## Schematic



Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

## Inductance vs Magnetizing Force

