

| SPECIFICATIONS | | | | | |
|-------------------------|-----------------|----------------|--|--|--|
| PARAMETERS | VALUES | UNITS | | | |
| RATED VOLTAGE | 12 | Vdc | | | |
| OPERATING VOLTAGE RANGE | 4 ~ 16 | Vdc | | | |
| RATED CURRENT (MAX) | 25/20 | mA | | | |
| MINIMUM SPL @ 10 CM | 105/100 | dBA | | | |
| RESONANT FREQUENCY | 2,900 ± 500 | Hz | | | |
| TONE OF PULL OF PATE | CONTINUOUS/ | 0 pulse /sec | | | |
| TONE OR PULSE RATE | SLOW PULSE | 1.5 pulse /sec | | | |
| OPERATING TEMPERATURE | -20 ~ +60 | °C | | | |
| STORAGE TEMPERATURE | -30 ~ +70 | °C | | | |
| HOUSING MATERIAL | ABS | - | | | |
| TERMINAL MATERIAL | Ni PLATED BRASS | - | | | |
| WEIGHT | 35 | grams | | | |
| | · | | | | |

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC.
ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

| | REVISION HISTORY | | |
|-----|---|-----------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| - | RELEASED FROM ENGINEERING | 5/16/2006 | |
| Α | REVISED TO INVETOR 3-D DRAWING TEMPLATE | 3/10/2008 | B.R. |
| В | REVISED PART HEIGHT DIMENSION | 7/13/2010 | B.R. |

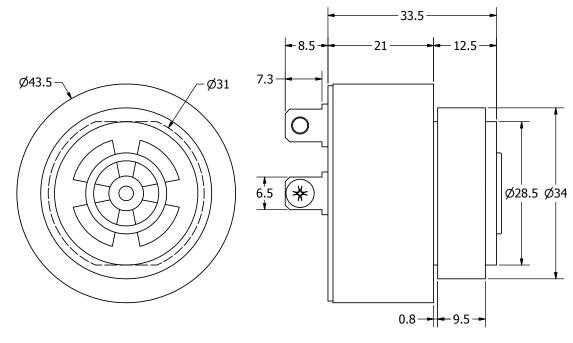

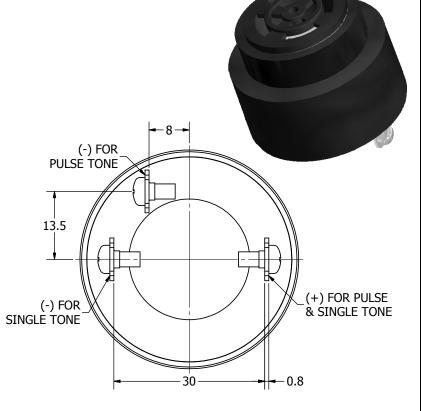

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

| UNLESS OTHERWISE SPECIFIED: | | |
|---|------|--|
| DIMENSIONS ARE IN MILLIMETERS. | SIZE | |
| TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. | A3 | |
| AI-4429-P-CP12-R.idw | | |

| J.D. | 5/16/2006 | E |
|------|-------------------------|----------|
| | pul. | |
| | a projects unlimited co |) Inc |

 Checked by
 Date
 Approved by
 Date
 Drawn Date

 E.P.
 5/16/2006
 B.R.
 5/16/2006
 3/10/2008

AI-4429-P-CP12-R

Indicator Edition Sheet 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio:

AI-4429-P-CP12-R