


RF TRANSFORMERS

Transformers for Wideband RF Applications

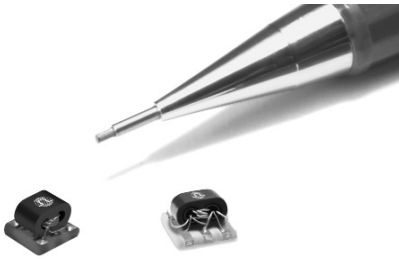

- ➊ Miniature surface mount package
- ➋ Various impedance ratios available
- ➌ Excellent insertion loss
- ➍ Ideal for Balanced-to-Unbalanced applications
- ➎ Products from .5 to 1500 MHz bandwidth

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number		Impedance Ratio ¹ Pri:Sec (±2%)	Turns Ratio Pri:Sec (±2%)	Bandwidth ^{2,3} (MHz TYP)			Insertion Loss @ Midband (dB TYP)	Schematic	Primary Pins
Regular	Low Cost			3 dB	2 dB	1 dB			
—	CX2041	1:1	1:1	0.05-450	0.75-300	0.1-200	0.6	B	4-6
CX2040	CX2040L	1:1	1:1	1.5-500	2.5-400	5-350	0.9	A	4-6
CX2043	CX2043L	1.5:1	√1.5:1	—	—	1-1000	0.2	D	3-6
CX2044	CX2044L	1.5:1	√1.5:1	—	1.0-500	5-100	0.2	A	1-3
CX2045	CX2045L	1:2	1:1.414	—	—	3-300	0.8	B	4-6
CX2047	CX2047L	1:4CT	1:2CT	—	.5-300	1.5-100	0.24	B	4-6
—	CX2049L	1:8CT	1:2.83CT	2-500	—	—	TBD	B	4-6

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C



Part Number		Impedance Ratio ¹ Pri:Sec (±2%)	Bandwidth ^{2, 3} (MHz TYP)		Schematic	Primary Pins
			2 dB	1 dB		
CX2038	CX2038L*	75 Ω:75 Ω	Up to 1500	4.5-1000	C	4-6
CX2039	CX2039L*	50 Ω:50 Ω	Up to 1500	4.5-1000	C	4-6

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: CX2040T).

Mechanical

Schematics

RAQ

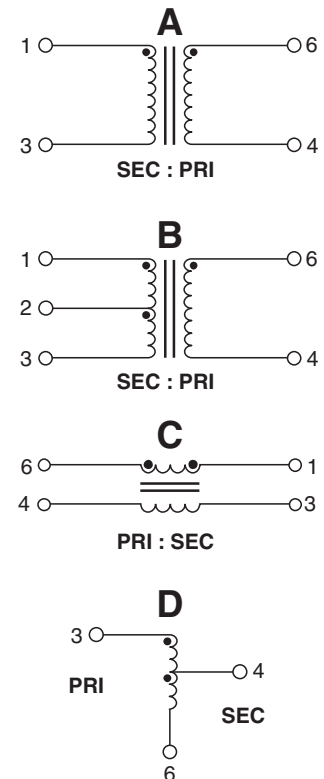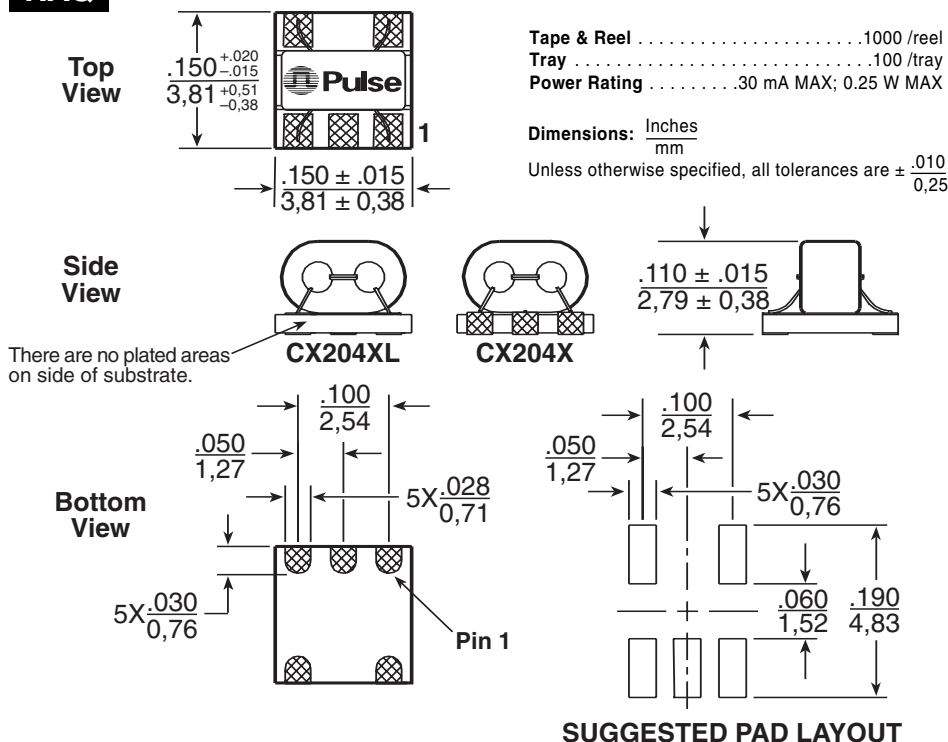

RF TRANSFORMERS

Transformers for Wideband RF Applications




Application Notes

- Bandwidth specifications for **CX2040** and **CX2047** are for a 50 Ω system.
- Materials used in the products are UL94-V0 recognized. Products meet requirements of IEC 695-2-2 (Needle Flame Test).
- CX2038**, **CX2039** and **CX2043** transformer configurations do not provide DC isolation between primary and secondary windings.
- For additional impedance ratios and frequency ranges, please contact Applications Engineering.
- Pick and place operation: smooth upper surface of device allows automatic pick and place.

Notes from Tables

- Impedance and turns ratios are specified primary:secondary. (CT=Center Tap).
- Bandwidth is referenced to midband loss.
- These transformers are verified to operate from -40°C to +85°C. Contact Applications Engineering for performance data.

Typical Insertion Loss @ 25°C

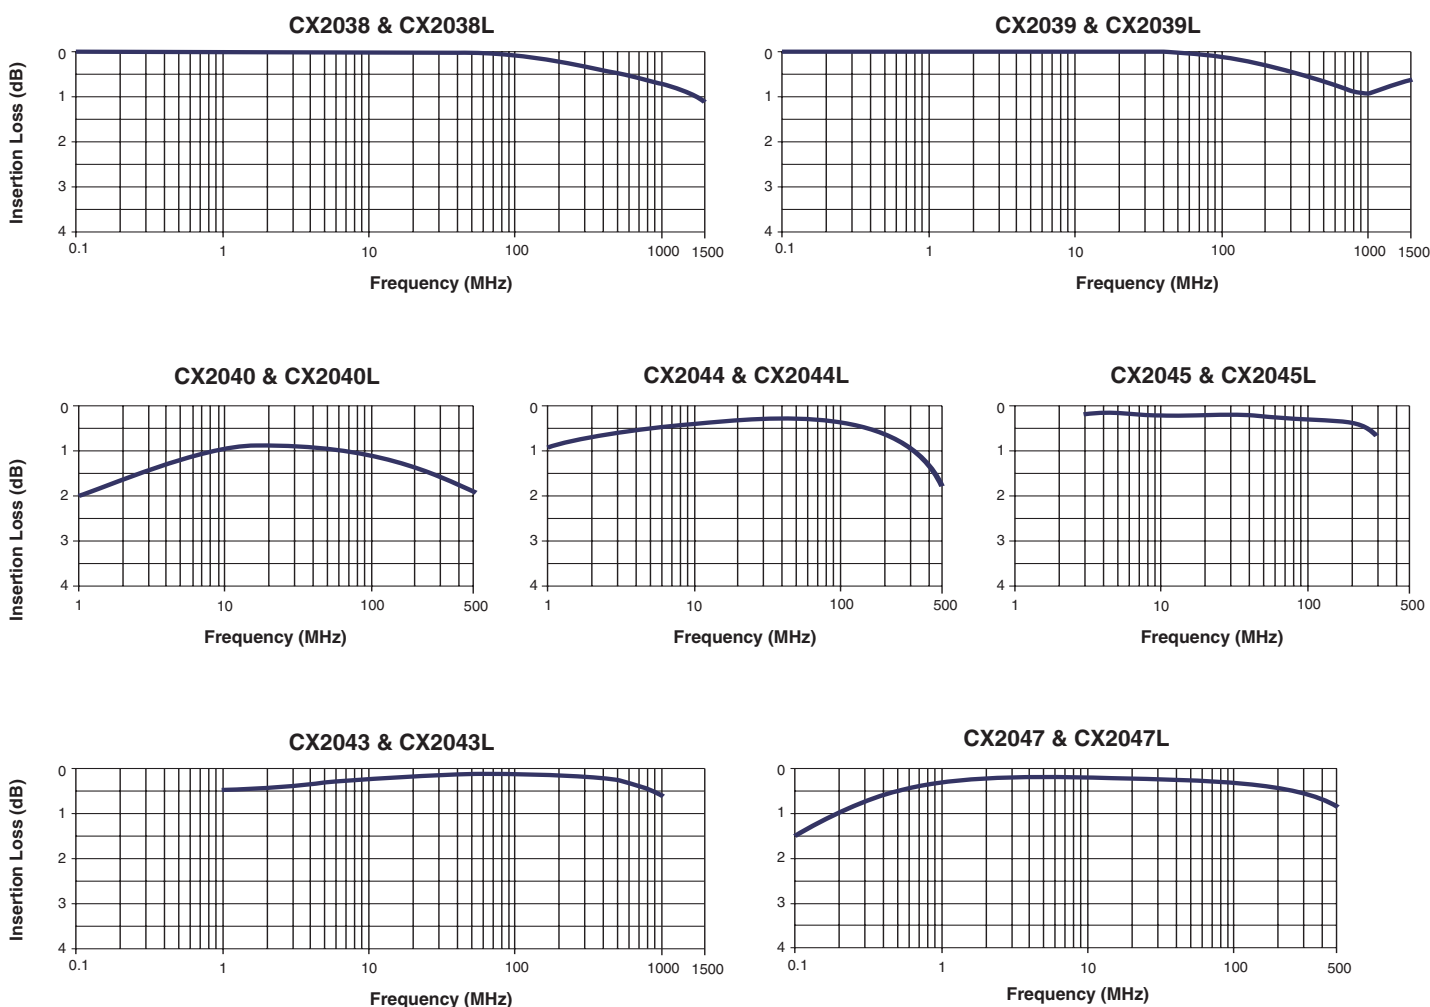

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	9/F, Phase 2, Tai Sang Shatin Warehouse Centre 6 Wong Chuk Yeung Street Fotan, Shatin, Hong Kong TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners.