

**Series A2000, LP2000 & CB2000****Single Row Terminal Blocks****SPECIFICATIONS****Rating:** A2: 30A, 300V\*

LP2: 30A, 150V\*


CB2: 30A, 300V\*

**Center Spacing:** 0.375" or 3/8" (9.52mm)**Wire Range:** #12-22 AWG Cu**Screw Size:** #6-32 zinc-plated phillslot**Torque Rating:** 9 lb-in.**Base:** Standoffs standard for easy flux washing**Distance Between Barriers:** 0.32" (8.1mm)**Recommended PCB Hole Diameter:** 0.076" (1.93mm)**Operating Temperature:** 105°C (221°F) max., -40°C (-40°F) min.**Molded Material:** Black, UL Rated 94V0 Thermoplastic**Breakdown Voltage:** 3400V (A2 & LP2); 4100V (CB2).**Agency Information:** UL File E62622, CSA File 47235;


IEC Compliance; CE Certified

*\*30A Rating achieved with a #10 copper wire crimped to a ring terminal;  
20A Rating without ring terminal.*



A20110807WR

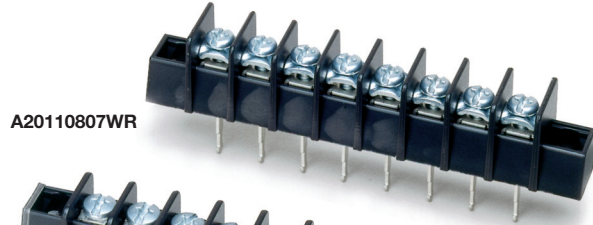

LP202110

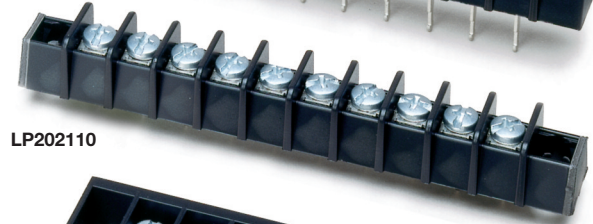

CB20210507

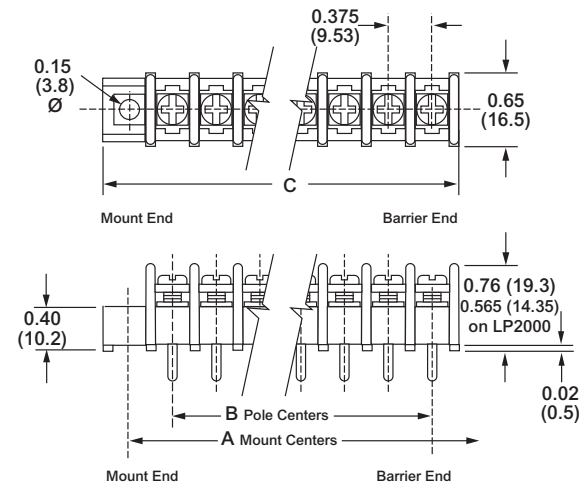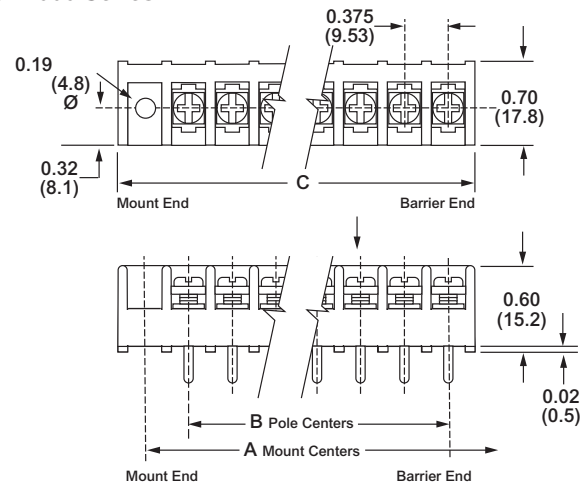**Dimensions - in (mm)****A2000 & LP2000 Series****CB2000 Series**

\* Dimensions in inches. To convert to millimeters, multiply by 25.4.

## Series A2000 & LP2000

### Single Row Terminal Blocks

#### Part Numbering System

| Series                                                           | Terminal Style                                                                                                                                                                                                                                                                                                            | Base/End                                                                                                                                                                                                                        | Poles                                                | Screw Options                                                                                                                                                                                                                                                                                                                                                  | Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A2</b>                                                        |                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                 |                                                      |                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LP2</b>                                                       |                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                 |                                                      |                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>A2</b> - standard barrier<br><b>LP2</b> - low profile barrier | <b>01*</b> - handwired<br><b>02</b> - printed circuit<br><b>03</b> - non feed-thru<br><b>04</b> - wire wrap tail<br><b>06</b> - handwired<br><b>07</b> - extended pin<br><b>08</b> - printed circuit<br><b>09</b> - 0.250" QC short<br><b>10</b> - 0.187" QC<br><b>14</b> - printed circuit<br><b>19</b> - 0.250" QC long | <b>1</b> - std. base/mnt. end<br><b>2</b> - std. base/barrier end<br><b>3</b> - insulator base/mnt. end<br><b>4</b> - insulator base/barrier end<br><b>5</b> - closed base/mount end<br><b>6</b> - closed base/molded mount end | <b>02 to 32</b><br><b>02 to 30</b> on mount end base | Blank - std. screw<br><b>00</b> - screws shipped bulk<br><b>03*</b> - stainless steel<br><b>04</b> - brass nickel-plated<br><b>07</b> - steel SEMS (not available with hardware options)<br><b>09*</b> - brass SEMS nickel-plated (not available with hardware options)<br><b>CA**</b> - captive screw<br><b>WR</b> - wire ready (not available on LP2 series) | <b>AB*</b> - angle mnt. options (pg 13)<br><b>A1 to A9</b> - 0.250" QC<br><b>B1 to B9</b> - 0.187" QC<br><b>DR*</b> - drilled right angle (pg 13)<br><b>L1 to L6</b> marking options (pg 27)<br><b>MP*</b> mounting plates (pg 13)<br><b>RC*</b> - retaining clips (pg 13)<br><b>R30 to R77</b> - right angle bends (pg 13)<br><b>S1*</b> - solder lug/flat<br><b>JA***, JB*** &amp; JC***</b> - barrier jumpers<br><b>OJ2*** &amp; OJ4***</b> - over barrier jumpers (not available w/covers)<br><b>Covers</b> - (pg 28) |

Base/End Note: 6 style not available with covers. 5 & 6 Styles only available with 03 terminals.


\*A2 only.

\*\*Not compatible with 03-stainless steel screws.


\*\*\*Contact factory for configuration.

#### Terminal Styles

Inches (Millimeters)




**01**  
Handwired




**02**  
Printed Circuit




**03**  
Non Feed-Thru




**04**  
Wire Wrap Tail




**06**  
Handwired




**07**  
Extended Pin




**08**  
Printed Circuit




**09**  
0.250" QC short



**10**  
0.187" QC



**14**  
Printed Circuit



**19**  
0.250" QC long

## Series A2000 & LP2000

### Single Row Terminal Blocks *Continued*

#### Screw Options (Bulk ordering part numbers are in parentheses)



**Standard**  
Zinc-plated Steel  
(F505-J)



**03**  
Stainless Steel  
(F507-J)



**04**  
Brass  
Nickel-Plated  
(F506-J)



**07**  
Steel SEMS  
(F523-J)



**09**  
Brass SEMS  
Nickel-Plated  
(F524-J)




**WR**  
Wire Ready

#### Hardware Options (Bulk ordering part numbers are in parentheses)


Inches (Millimeters)

##### Solder Lugs




**S1**  
(2S1-J)


##### Jumpers



**†JA**  
(JA2-02-J)



**†JB**  
(JB2-02-J)



**†JC**  
(JC2-02-J)




**†OJ2**  
(OJ2-J)




**†OJ4**  
(OJ4-J)

##### Quick Connects


Blade Width A = 0.250" Blade Width B = 0.187"




**A1 & B1**  
(2A1-J & 2B1-J)




**A2 & B2**  
(2A2-J & 2B2-J)




**A3 & B3**  
(2A3-J & 2B3-J)




**A4 & B4**  
(2A4-J & 2B4-J)




**A5 & B5**  
(2A5-J & 2B5-J)




**A6 & B6**  
(2A6-J & 2B6-J)



**A7 & B7**  
(2A7-J & 2B7-J)



**A8 & B8**  
(2A8-J & 2B8-J)



**A9 & B9**  
(2A9-J & 2B9-J)

†Contact factory for configuration.

#### Base/End Options

Inches (Millimeters)




**1 - Standard base/mount end**



**2 - Standard base/barrier end**



**3 - Insulator base/mount end**



**4 - Insulator base/barrier end**




**5 - Closed base/mount end**




**6 - Closed base/molded mount end**

##### Mount End Details



**SECTION A-A**




**SECTION B-B**

**6**  
**Molded Mount End**


**1, 3 & 5**  
**Mount End**

**Series A2000 & LP2000**Single Row Terminal Blocks *Continued***Mounting Options****Right Angle Bends (A2, LP2 only)**

Right angle terminals are offered on the A2000 & LP2000 Series. Configurations are defined in these dimensions: X = pin extension beyond the block base; Z = length from block base to centerline of the terminal tip. Standard bends consist of the X and Z dimensions shown in the chart. Specify by adding the selected Bend Option Code to the terminal part number.


**04 Terminal Bend Configurations**

| Bend Option Code | X (minimum) | Z    | Available w/insulator base |
|------------------|-------------|------|----------------------------|
| R30              | 0.04        | 0.28 | No                         |
| R35              | 0.01        | 0.23 | No                         |
| R36              | 0.02        | 0.22 | No                         |
| R39              | 0.05        | 0.19 | No                         |
| R42              | 0.08        | 0.16 | No                         |
| R46              | 0.12        | 0.12 | No                         |
| R48              | 0.14        | 0.10 | No                         |
| R50              | 0.16        | 0.08 | No                         |


**07 Terminal Bend Configurations**

| Bend Option Code | X (minimum) | Z    | Available w/insulator base |
|------------------|-------------|------|----------------------------|
| R30              | 0.04        | 0.55 | Yes                        |
| R35              | 0.01        | 0.50 | Yes                        |
| R36              | 0.02        | 0.49 | Yes                        |
| R42              | 0.08        | 0.43 | Yes                        |
| R46              | 0.12        | 0.39 | Yes                        |
| R50              | 0.16        | 0.35 | No                         |
| R53              | 0.19        | 0.32 | No                         |
| R66              | 0.32        | 0.19 | No                         |
| R69              | 0.35        | 0.16 | No                         |
| R75              | 0.41        | 0.10 | No                         |
| R77              | 0.43        | 0.08 | No                         |


Dimensions in inches. To convert to millimeters, multiply by 25.4.

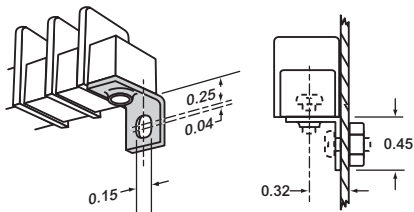**Angle Brackets (A2, LP2 only)****Option AB**


Angle brackets enable block to be fastened at right angles to normal mount position. Bulk part number **2AB-J**.

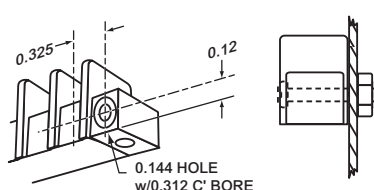**Drilled Right Angle (A2, LP2 only)****Option DR**

Counterbored holes across mount ends of block enable fastening with two screws at right angles to normal mount position.

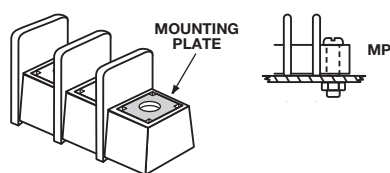**Mounting Plates****Option**

**MP** Metal inserts with 0.150" dia. hole accept #6 screw. Bulk part number **2MP-J**.

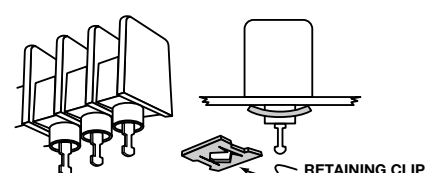**Retaining Clip****Option RC**

Use on standoff tubes. Fit panels up to 0.125" thick. Two clips for every five positions. Supplied unassembled. Bulk part number **H541-J**.

## Series CB2000

## Single Row Terminal Blocks

## Part Numbering System


| Series                   | Terminal Style                                                                                                  | Base/End                                       | Poles                                                | Screws                                                                                                                             | Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CB2</b>               |                                                                                                                 |                                                |                                                      |                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>CB2</b> - closed back | <b>01</b> - handwired<br><b>02</b> - printed circuit<br><b>07</b> - extended pin<br><b>14</b> - printed circuit | <b>1</b> - mount end<br><b>2</b> - barrier end | <b>02 to 32</b><br><b>02 to 30</b> on mount end base | <b>07</b> - steel SEMS standard<br><b>09</b> - brass SEMS nickel-plated<br><b>CA</b> - captive screw<br><b>07CA</b> - SEMS captive | <b>AB**</b> - angle mounting brackets (pg 15)<br><b>A7 to A9</b> - 0.250" QC<br><b>B7 to B9</b> - 0.187" QC<br><b>EB</b> - exit back terminals<br><b>EF</b> - exit front terminals<br><b>L1 to L6</b> marking options (pg 27)<br><b>LT1 to LT6</b> marking options (pg 27)<br><b>MP</b> mtg. plates (pg 15)<br><b>S1</b> - solder lug/flat<br><b>JA***, JB*** &amp; JC***</b> - barrier jumpers<br><b>OJ2*** &amp; OJ4***</b> - over barrier jumpers<br><b>Covers</b> - (pg 28) |

\*\*Only available on 3-poles and up.

\*\*\*Contact factory for configuration.

## Terminal Styles

Inches (Millimeters)

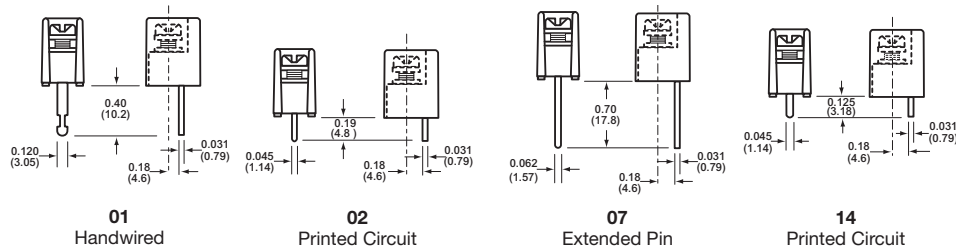

## Screw Options (Bulk ordering part numbers are in parentheses)



**07**  
Steel SEMS  
zinc-plated  
(B001-7084-J)




**09**  
Brass SEMS  
nickel-plated  
(F524-J)

\* NOTE: Wire ready screws standard on all terminal styles.

## CB2 Terminal Exit Options

Inches (Millimeters)

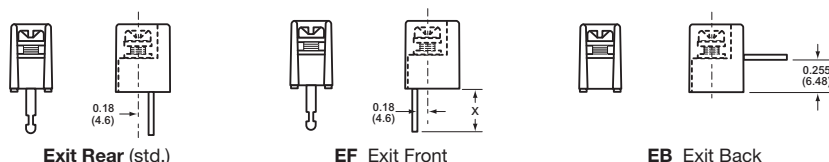


## Series CB2000

### Single Row Terminal Blocks






#### Hardware Options (Bulk ordering part numbers are in parentheses)

Inches (Millimeters)

##### Solder Lugs






##### Jumpers



##### Quick Connects

Blade Width A = 0.250". Blade Width B = 0.187".






†Contact factory for configuration.

#### Mounting Options

Inches (Millimeters)

##### Right Angle Mounting Bracket

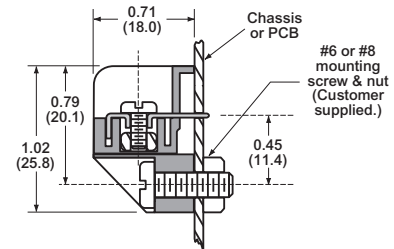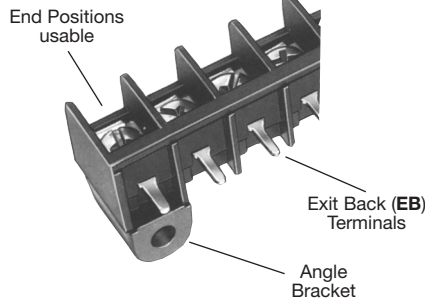


##### Option AB

##### Mounts blocks on PC boards at a right angle.

- Protects solder joints.
- Recommended for all EB (Exit Back) PCB terminal blocks.
- Bracket snaps securely on block (no hardware required).
- Minimum strip length (end positions are usable).
- Mount with #6-32 or #8-32 screws (not supplied).

##### Mounting Plates



##### Option MP

**MP** Metal inserts with 0.150" dia. hole accept #6 screw.  
Bulk part number **2MP-J**.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Eaton:

[A201302](#) [A202106](#) [A202202](#) [A202203](#) [A20220307L1](#) [A204102MP](#) [A204104MP](#) [A20710707R53AB](#) [A210406](#)  
[A214204](#) [CB20220307EB](#) [CB20220607](#) [CB20220607EB](#) [LP201103](#) [LP201106](#) [LP201106MP](#) [LP201206](#) [LP201209](#)  
[LP20130207](#) [LP202104CA](#) [LP202104MT](#) [LP202105](#) [LP20210507](#) [LP20210604MP](#) [LP202107MT](#) [LP202109MT](#)  
[LP202110](#) [LP202112](#) [LP20220307](#) [LP20220407](#) [LP20220507](#) [LP202205A3](#) [LP202206](#) [LP20220604](#) [LP20220803](#)  
[LP20220809](#) [LP20220907](#) [LP202210A3](#) [LP20221107](#) [LP202213](#) [LP20221407](#) [LP20221507](#) [LP20221607](#)  
[LP202217](#) [LP20221707](#) [LP202218](#) [LP20222007](#) [LP202221](#) [LP202224](#) [LP203102A2](#) [LP203103A2](#) [LP203103MP](#)  
[LP20310400](#) [LP203105MP](#) [LP20310604CA](#) [LP203106MPS1](#) [LP20310703](#) [LP203108](#) [LP20310907](#)  
[LP203112B2B3MP](#) [LP203114B2B3MP](#) [LP203115A3](#) [LP20311603](#) [LP203118B2B3MP](#) [LP203130A3](#) [LP203130A6](#)  
[LP20320207](#) [LP20350207S1](#) [LP203503](#) [LP20350300MP](#) [LP203504](#) [LP203506B1B2B3](#) [LP20351304](#) [LP203514](#)  
[LP204002](#) [LP20410209](#) [LP204104](#) [LP20410709](#) [LP204112](#) [LP204202R50](#) [LP20420407R50](#) [LP204204R50](#)  
[LP204205](#) [LP204212](#) [LP204212R46](#) [LP204212R48](#) [LP204406](#) [LP20440603](#) [LP20600304](#) [LP206104](#) [LP206120](#)  
[LP206122](#) [LP206204](#) [LP206205](#) [LP207112R36](#) [LP20720304](#) [LP207206L5](#) [LP207208](#) [LP207410R46](#)  
[LP20820207CA](#)