



Micropower Single-Supply Rail-to-Rail Input/Output Op Amps

OP191/OP291/OP491

FEATURES

Single-Supply Operation: 2.7 V to 12 V
Wide Input Voltage Range
Rail-to-Rail Output Swing
Low Supply Current: 300 μ A/Amp
Wide Bandwidth: 3 MHz
Slew Rate: 0.5 V/ μ s
Low Offset Voltage: 700 μ V
No Phase Reversal

APPLICATIONS

Industrial Process Control
Battery-Powered Instrumentation
Power Supply Control and Protection
Telecommunications
Remote Sensors
Low Voltage Strain Gage Amplifiers
DAC Output Amplifiers

GENERAL DESCRIPTION

The OP191, OP291, and OP491 are single, dual, and quad micropower, single-supply, 3 MHz bandwidth amplifiers featuring rail-to-rail inputs and outputs. All are guaranteed to operate from a +3 V single supply as well as $\pm$ 5 V dual supplies.

Fabricated on Analog Devices' CBCMOS process, the OP191 family has a unique input stage that allows the input voltage to safely extend 10 V beyond either supply without any phase inversion or latch-up. The output voltage swings to within millivolts of the supplies and continues to sink or source current all the way to the supplies.


Applications for these amplifiers include portable telecommunications equipment, power supply control and protection, and interface for transducers with wide output ranges. Sensors requiring a rail-to-rail input amplifier include Hall effect, piezo electric, and resistive transducers.

The ability to swing rail-to-rail at both the input and output enables designers to build multistage filters in single-supply systems and to maintain high signal-to-noise ratios.


The OP191/OP291/OP491 are specified over the extended industrial -40°C to $+125^{\circ}\text{C}$ temperature range. The OP191 single and OP291 dual amplifiers are available in 8-lead plastic SOIC surface-mount packages. The OP491 quad is available in 14-lead PDIP, narrow 14-lead SOIC, and 14-lead TSSOP packages.

PIN CONFIGURATIONS


8-Lead Narrow-Body SOIC




8-Lead Narrow-Body SOIC




14-Lead Narrow-Body SOIC



14-Lead PDIP

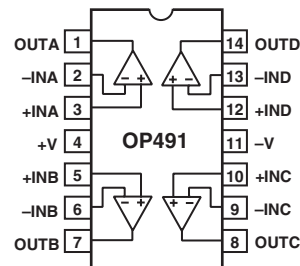

14-Lead TSSOP

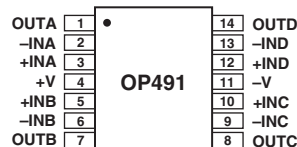

REV. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781/329-4700 www.analog.com
Fax: 781/326-8703 © 2004 Analog Devices, Inc. All rights reserved.

OP191/OP291/OP491—SPECIFICATIONS

ELECTRICAL SPECIFICATIONS (@ $V_S = 3.0\text{ V}$, $V_{CM} = 0.1\text{ V}$, $V_O = 1.4\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage OP191G	V _{OS}	−40°C ≤ T _A ≤ +125°C		80	500	μV
					1	mV
OP291G/OP491G	V _{OS}	−40°C ≤ T _A ≤ +125°C		80	700	μV
					1.25	mV
Input Bias Current	I _B	−40°C ≤ T _A ≤ +125°C		30	65	nA
Input Offset Current	I _{OS}	−40°C ≤ T _A ≤ +125°C			95	nA
		−40°C ≤ T _A ≤ +125°C		0.1	11	nA
Input Voltage Range		−40°C ≤ T _A ≤ +125°C			22	nA
			0		3	V
Common-Mode Rejection Ratio	CMRR	V _{CM} = 0 V to 2.9 V	70	90		dB
		−40°C ≤ T _A ≤ +125°C	65	87		dB
Large Signal Voltage Gain	A _{VO}	R _L = 10 kΩ, V _O = 0.3 V to 2.7 V	25	70		V/mV
		−40°C ≤ T _A ≤ +125°C		50		V/mV
Offset Voltage Drift	ΔV _{OS} /ΔT			1.1		μV/°C
Bias Current Drift	ΔI _B /ΔT			100		pA/°C
Offset Current Drift	ΔI _{OS} /ΔT			20		pA/°C
OUTPUT CHARACTERISTICS						
Output Voltage High	V _{OH}	R _L = 100 kΩ to GND	2.95	2.99		V
		−40°C to +125°C	2.90	2.98		V
Output Voltage Low	V _{OL}	R _L = 2 kΩ to GND	2.8	2.9		V
		−40°C to +125°C	2.70	2.80		V
Output Voltage Low	V _{OL}	R _L = 100 kΩ to V+		4.5	10	mV
		−40°C to +125°C			35	mV
Output Voltage Low	V _{OL}	R _L = 2 kΩ to V+		40	75	mV
		−40°C to +125°C			130	mV
Short-Circuit Limit	I _{SC}	Sink/Source	±8.75	±13.50		mA
		−40°C to +125°C	±6.0	±10.5		mA
Open-Loop Impedance	Z _{OUT}	f = 1 MHz, A _V = 1		200		Ω
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	V _S = 2.7 V to 12 V	80	110		dB
		−40°C ≤ T _A ≤ +125°C	75	110		dB
Supply Current/Amplifier	I _{SY}	V _O = 0 V		200	350	μA
		−40°C ≤ T _A ≤ +125°C		330	480	μA
DYNAMIC PERFORMANCE						
Slew Rate	+SR	R _L = 10 kΩ		0.4		V/μs
Slew Rate	−SR	R _L = 10 kΩ		0.4		V/μs
Full-Power Bandwidth	BW _P	1% Distortion		1.2		kHz
Settling Time	t _S	To 0.01%		22		μs
Gain Bandwidth Product	GBP			3		MHz
Phase Margin	θ _O			45		Degrees
Channel Separation	CS	f = 1 kHz, R _L = 10 kΩ		145		dB
NOISE PERFORMANCE						
Voltage Noise	e _n p-p	0.1 Hz to 10 Hz		2		μV p-p
Voltage Noise Density	e _n	f = 1 kHz		35		nV/√Hz
Current Noise Density	i _n			0.8		pA/√Hz

Specifications subject to change without notice.

ELECTRICAL SPECIFICATIONS (@ $V_S = 5.0\text{ V}$, $V_{CM} = 0.1\text{ V}$, $V_O = 1.4\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		80	500	μV
					1.0	mV
	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		80	700	μV
					1.25	mV
Input Bias Current	I_B	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		30	65	nA
					95	nA
Input Offset Current	I_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		0.1	11	nA
					22	nA
Input Voltage Range			0		5	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0\text{ V to } 4.9\text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	70	93		dB
			65	90		dB
Large Signal Voltage Gain	A_{VO}	$R_L = 10\text{ k}\Omega$, $V_O = 0.3\text{ V to } 4.7\text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	25	70		V/mV
				50		V/mV
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		1.1		$\mu\text{V}/^\circ\text{C}$
Bias Current Drift	$\Delta I_B/\Delta T$			100		$\text{pA}/^\circ\text{C}$
Offset Current Drift	$\Delta I_{OS}/\Delta T$			20		$\text{pA}/^\circ\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$R_L = 100\text{ k}\Omega$ to GND -40°C to $+125^\circ\text{C}$	4.95	4.99		V
			4.90	4.98		V
		$R_L = 2\text{ k}\Omega$ to GND -40°C to $+125^\circ\text{C}$	4.8	4.85		V
			4.65	4.75		V
Output Voltage Low	V_{OL}	$R_L = 100\text{ k}\Omega$ to V+ -40°C to $+125^\circ\text{C}$		4.5	10	mV
					35	mV
		$R_L = 2\text{ k}\Omega$ to V+ -40°C to $+125^\circ\text{C}$		40	75	mV
					155	mV
Short-Circuit Limit	I_{SC}	Sink/Source -40°C to $+125^\circ\text{C}$	± 8.75	± 13.5		mA
			± 6.0	± 10.5		mA
Open-Loop Impedance	Z_{OUT}	$f = 1\text{ MHz}$, $A_V = 1$		200		Ω
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = 2.7\text{ V to } 12\text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	80	110		dB
			75	110		dB
Supply Current/Amplifier	I_{SY}	$V_O = 0\text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		220	400	μA
				350	500	μA
DYNAMIC PERFORMANCE						
Slew Rate	+SR	$R_L = 10\text{ k}\Omega$		0.4		V/ μs
Slew Rate	-SR	$R_L = 10\text{ k}\Omega$		0.4		V/ μs
Full-Power Bandwidth	BW_P	1% Distortion		1.2		kHz
Settling Time	t_s	To 0.01%		22		μs
Gain Bandwidth Product	GBP			3		MHz
Phase Margin	θ_O			45		Degrees
Channel Separation	CS	$f = 1\text{ kHz}$, $R_L = 10\text{ k}\Omega$		145		dB
NOISE PERFORMANCE						
Voltage Noise	e_n p-p	0.1 Hz to 10 Hz		2		$\mu\text{V p-p}$
Voltage Noise Density	e_n	$f = 1\text{ kHz}$		35		$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	i_n			0.8		$\text{pA}/\sqrt{\text{Hz}}$

NOTE

+5 V specifications are guaranteed by +3 V and $\pm 5\text{ V}$ testing.

Specifications subject to change without notice.

OP191/OP291/OP491

ELECTRICAL SPECIFICATIONS (@ $V_0 = \pm 5.0 \text{ V}$, $-4.9 \text{ V} \leq V_{\text{CM}} \leq +4.9 \text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	OP191	V_{OS}		80	500	μV
	OP291/OP491	V_{OS}			1	mV
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$		80	700	μV
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$			1.25	mV
Input Bias Current		I_B		30	65	nA
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$			95	nA
Input Offset Current		I_{OS}		0.1	11	nA
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$			22	nA
Input Voltage Range			-5		+5	V
Common-Mode Rejection		CMR	75	100		dB
		$V_{CM} = \pm 5\text{ V}$	67	97		dB
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$				
Large Signal Voltage Gain		A_{VO}	25	70		
		$R_L = 10\text{ k}\Omega$, $V_O = \pm 4.7\text{ V}$,		50		V/mV
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$				
Offset Voltage Drift		$\Delta V_{OS}/\Delta T$		1.1		$\mu V/^{\circ}C$
Bias Current Drift		$\Delta I_B/\Delta T$		100		$pA/^{\circ}C$
Offset Current Drift		$\Delta I_{OS}/\Delta T$		20		$pA/^{\circ}C$
OUTPUT CHARACTERISTICS						
Output Voltage Swing		V_O	± 4.93	± 4.99		V
		$R_L = 100\text{ k}\Omega$ to GND	± 4.90	± 4.98		V
		$-40^{\circ}C$ to $+125^{\circ}C$	± 4.80	± 4.95		V
		$R_L = 2\text{ k}\Omega$ to GND	± 4.65	± 4.75		V
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$	± 8.75	± 16.00		mA
Short-Circuit Limit		I_{SC}	± 8.75	± 16.00		mA
		Sink/Source	± 6	± 13		mA
		$-40^{\circ}C$ to $+125^{\circ}C$		200		Ω
Open-Loop Impedance		Z_{OUT}				
		$f = 1\text{ MHz}$, $A_V = 1$				
POWER SUPPLY						
Power Supply Rejection Ratio		PSRR	80	110		dB
		$V_S = \pm 5\text{ V}$	70	100		dB
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$				
Supply Current/Amplifier		I_{SY}		260	420	μA
		$V_O = 0\text{ V}$		390	550	μA
		$-40^{\circ}C \leq T_A \leq +125^{\circ}C$				
DYNAMIC PERFORMANCE						
Slew Rate		$\pm SR$		0.5		V/ μs
Full-Power Bandwidth		BW_P		1.2		kHz
Settling Time		t_s		22		μs
Gain Bandwidth Product		GBP		3		MHz
Phase Margin		θ_O		45		Degrees
Channel Separation		CS		145		dB
NOISE PERFORMANCE						
Voltage Noise		$e_n\text{ p-p}$		2		$\mu V\text{ p-p}$
Voltage Noise Density		e_n		35		$nV/\sqrt{Hz}$
Current Noise Density		i_n		0.8		$pA/\sqrt{Hz}$

Specifications subject to change without notice.

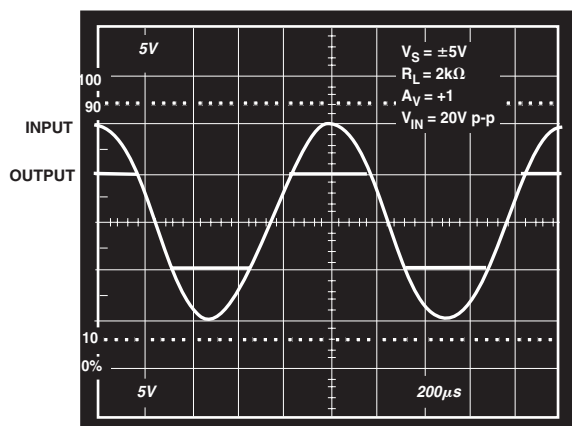


Figure 1. Input and Output with Inputs Overdriven by 5 V

ABSOLUTE MAXIMUM RATINGS^{1, 2}

Supply Voltage	16 V
Input Voltage	GND to V_S 10 V
Differential Input Voltage	7 V
Output Short-Circuit Duration to GND	Indefinite
Storage Temperature Range	
N, R, RU Packages	–65°C to +150°C
Operating Temperature Range	
OP191G/OP291G/OP491G	–40°C to +125°C
Junction Temperature Range	
N, R, RU Packages	–65°C to +150°C
Lead Temperature Range (Soldering, 60 sec)	300°C

Package Type	θ_{JA} ³	θ_{JC}	Unit
8-Lead SOIC (R)	158	43	°C/W
14-Lead PDIP (N)	76	33	°C/W
14-Lead SOIC (R)	120	36	°C/W
14-Lead TSSOP (RU)	180	35	°C/W

NOTES

¹Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

²Absolute maximum ratings apply to both DICE and packaged parts, unless otherwise noted.

³ θ_{JA} is specified for the worst-case conditions; i.e., θ_{JA} is specified for device in socket for PDIP packages; θ_{JA} is specified for device soldered in circuit board for TSSOP and SOIC packages.

ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option
OP191GS	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP191GS-REEL	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP191GS-REEL7	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP291GS	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP291GS-REEL	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP291GS-REEL7	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP291GSZ*	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP291GSZ-REEL*	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP291GSZ-REEL7*	–40°C to +125°C	8-Lead SOIC	R-8 [S-Suffix]
OP491GP	–40°C to +125°C	14-Lead PDIP	N-14 [P-Suffix]
OP491GS	–40°C to +125°C	14-Lead SOIC	R-14 [S-Suffix]
OP491GS-REEL	–40°C to +125°C	14-Lead SOIC	R-14 [S-Suffix]
OP491GS-REEL7	–40°C to +125°C	14-Lead SOIC	R-14 [S-Suffix]
OP491GSZ*	–40°C to +125°C	14-Lead SOIC	R-14 [S-Suffix]
OP491GSZ-REEL*	–40°C to +125°C	14-Lead SOIC	R-14 [S-Suffix]
OP491GSZ-REEL7*	–40°C to +125°C	14-Lead SOIC	R-14 [S-Suffix]
OP491GRU-REEL	–40°C to +125°C	14-Lead TSSOP	RU-14
OP491GBC			DIE form


*Z = Pb-free part.

CAUTION


ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the OP191/OP291/OP491 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




OP191/OP291/OP491—Typical Performance Characteristics

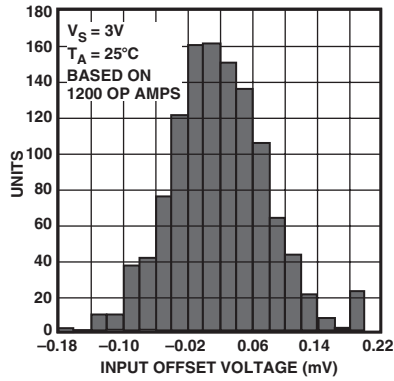


TPC 1. OP291 Input Offset Voltage Distribution, $V_S = 3\text{ V}$

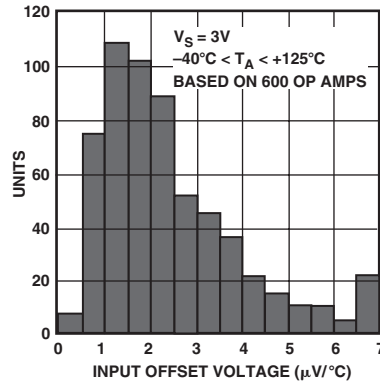


TPC 2. OP291 Input Offset Voltage Drift Distribution, $V_S = 3\text{ V}$

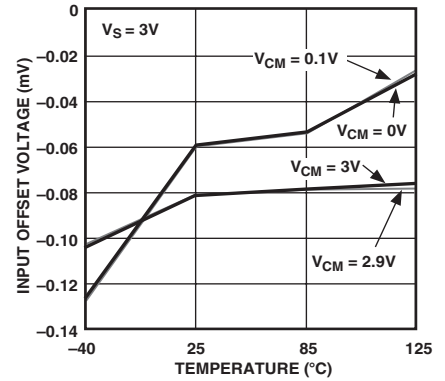


TPC 3. Input Offset Voltage vs. Temperature, $V_S = 3\text{ V}$

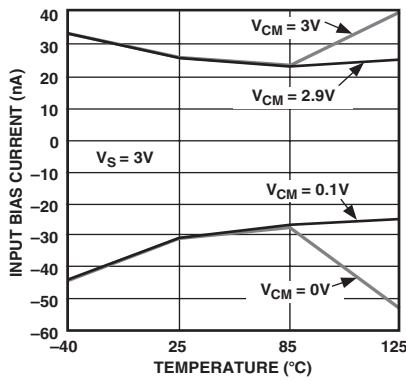


TPC 4. Input Bias Current vs. Temperature, $V_S = 3\text{ V}$

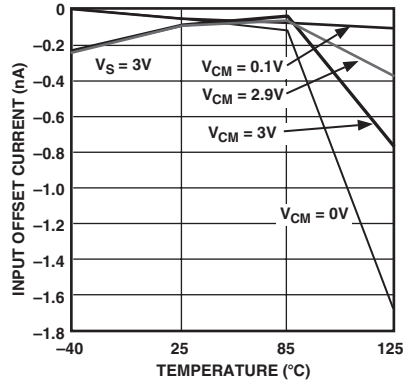


TPC 5. Input Offset Current vs. Temperature, $V_S = 3\text{ V}$

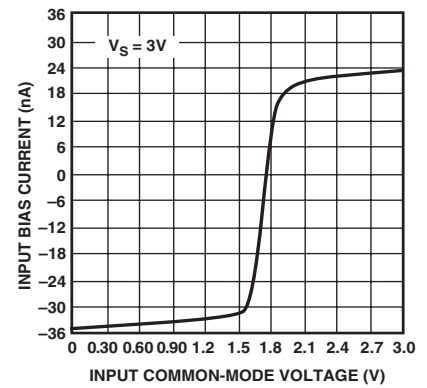


TPC 6. Input Bias Current vs. Input Common-Mode Voltage, $V_S = 3\text{ V}$

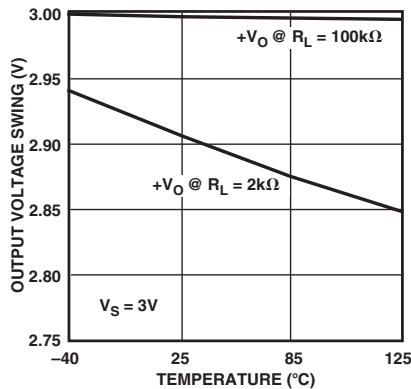


TPC 7. Output Voltage Swing vs. Temperature, $V_S = 3\text{ V}$

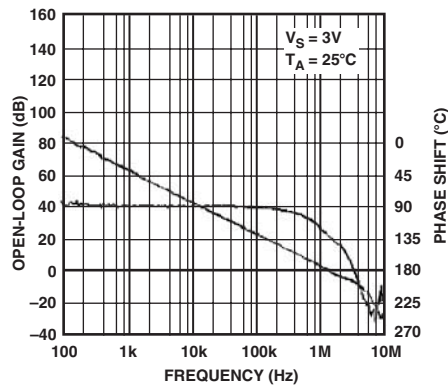


TPC 8. Open-Loop Gain and Phase vs. Frequency, $V_S = 3\text{ V}$

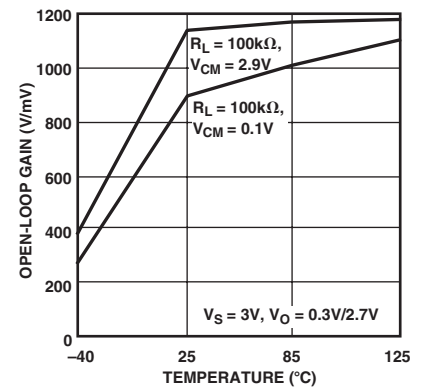


TPC 9. Open-Loop Gain vs. Temperature, $V_S = 3\text{ V}$

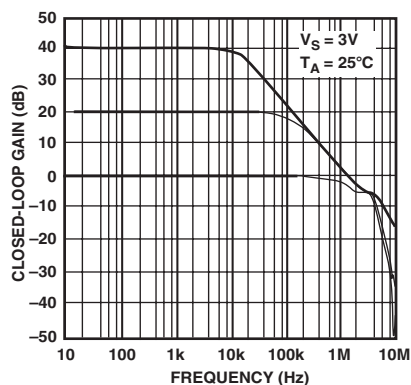


TPC 10. Closed-Loop Gain vs. Frequency, $V_S = 3\text{ V}$

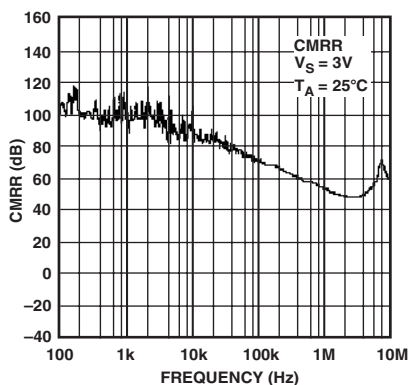


TPC 11. CMRR vs. Frequency, $V_S = 3\text{ V}$

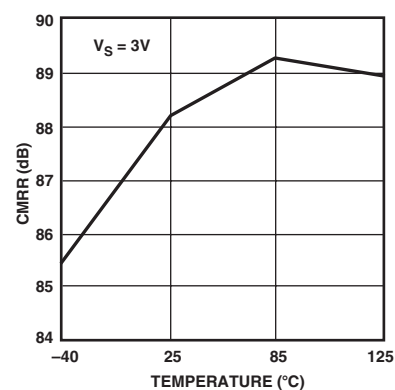


TPC 12. CMRR vs. Temperature, $V_S = 3\text{ V}$

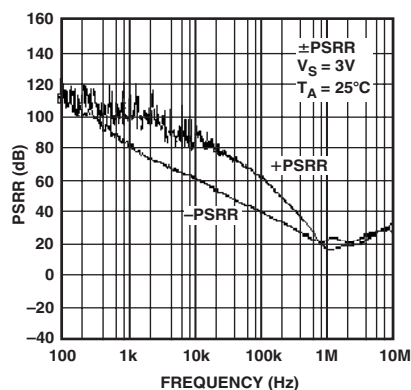


TPC 13. PSRR vs. Frequency, $V_S = 3\text{ V}$

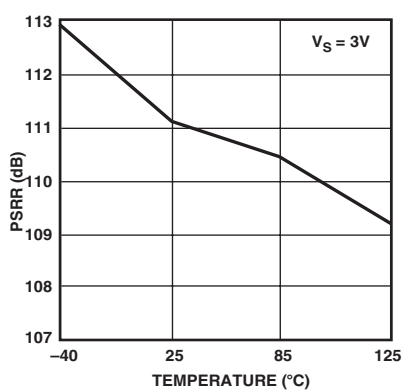


TPC 14. PSRR vs. Temperature, $V_S = 3\text{ V}$

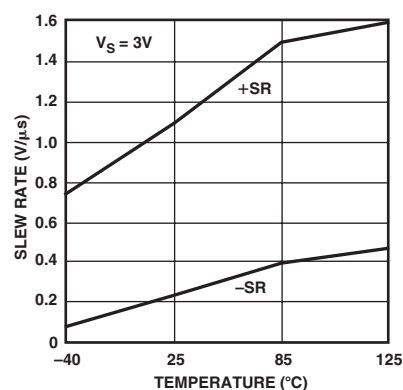


TPC 15. Slew Rate vs. Temperature, $V_S = 3\text{ V}$

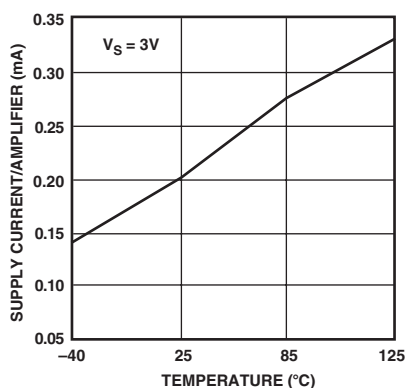

TPC 16. Supply Current vs. Temperature, $V_S = +3\text{ V}, +5\text{ V}, \pm 5\text{ V}$

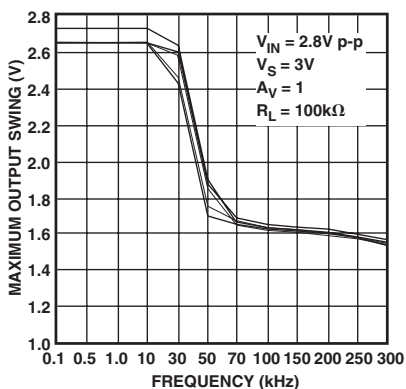


TPC 17. Maximum Output Swing vs. Frequency, $V_S = 3\text{ V}$

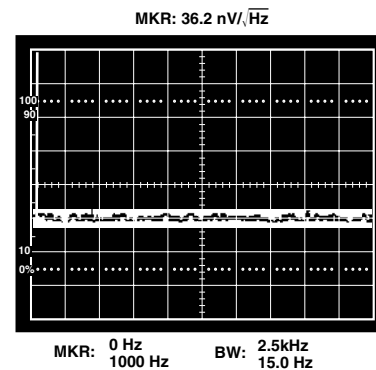


TPC 18. Voltage Noise Density, $V_S = +3\text{ V to } \pm 5\text{ V}, A_{VO} = 1000$


OP191/OP291/OP491

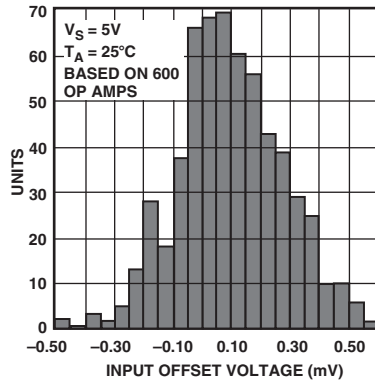


TPC 19. OP291 Input Offset Voltage Distribution, $V_S = 5\text{ V}$

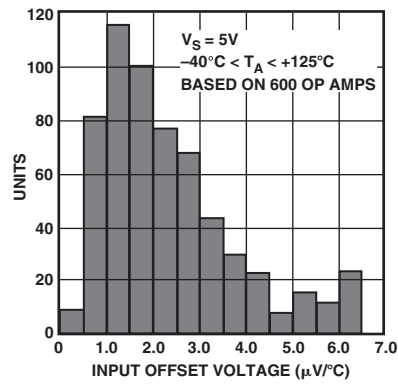


TPC 20. OP291 Input Offset Voltage Drift Distribution, $V_S = 5\text{ V}$

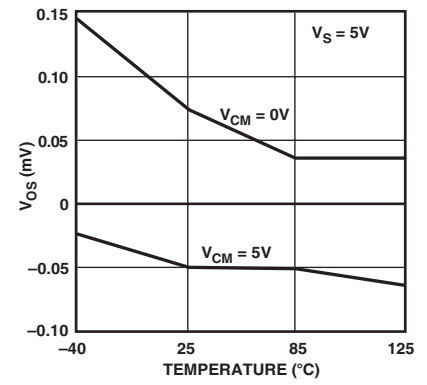


TPC 21. Input Offset Voltage vs. Temperature, $V_S = 5\text{ V}$

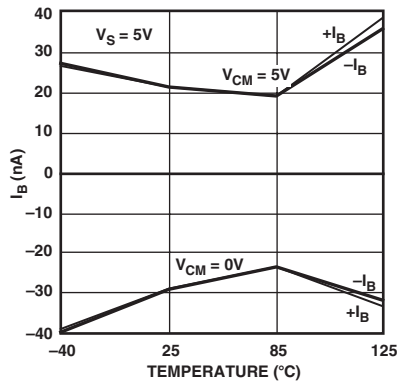


TPC 22. Input Bias Current vs. Temperature, $V_S = 5\text{ V}$

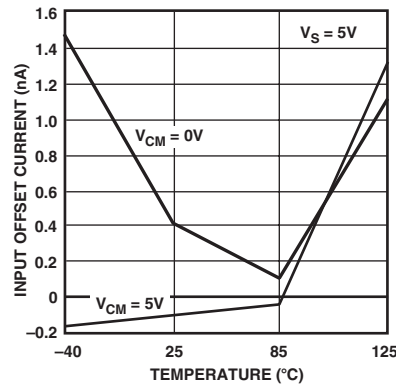


TPC 23. Input Offset Current vs. Temperature, $V_S = 5\text{ V}$

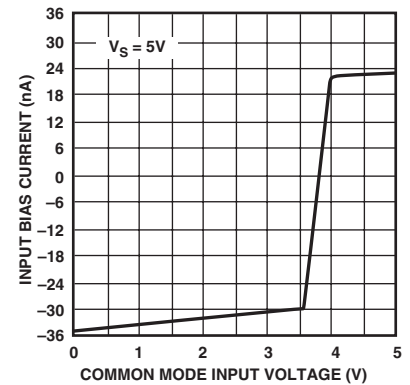


TPC 24. Input Bias Current vs. Common-Mode Input Voltage, $V_S = 5\text{ V}$

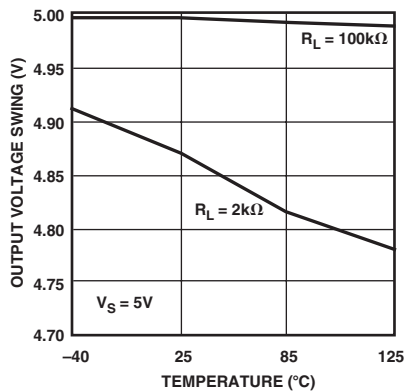


TPC 25. Output Voltage Swing vs. Temperature, $V_S = 5\text{ V}$

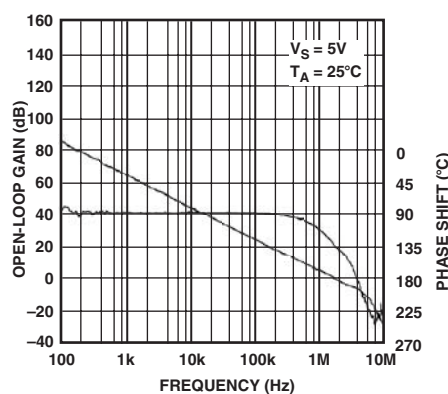


TPC 26. Open-Loop Gain and Phase vs. Frequency, $V_S = 5\text{ V}$

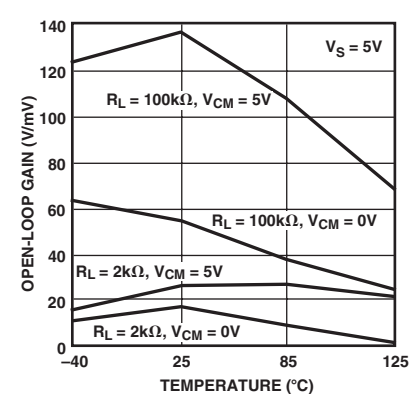


TPC 27. Open-Loop Gain vs. Temperature, $V_S = 5\text{ V}$

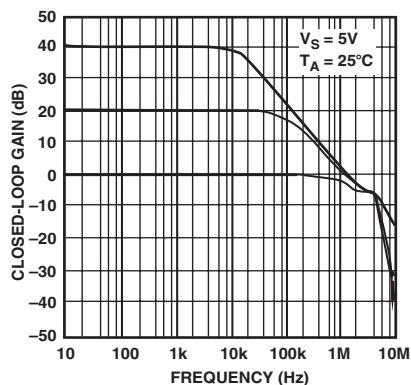


TPC 28. Closed-Loop Gain vs. Frequency, $V_S = 5\text{ V}$

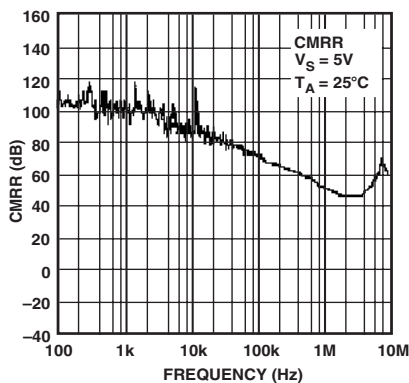


TPC 29. CMRR vs. Frequency, $V_S = 5\text{ V}$

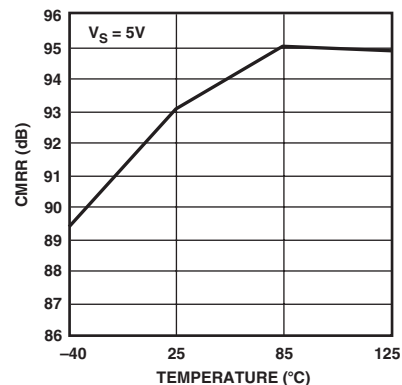


TPC 30. CMRR vs. Temperature, $V_S = 5\text{ V}$

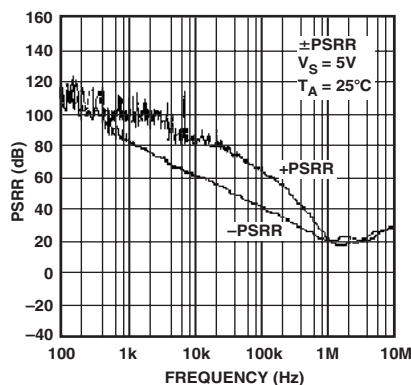


TPC 31. PSRR vs. Frequency, $V_S = 5\text{ V}$

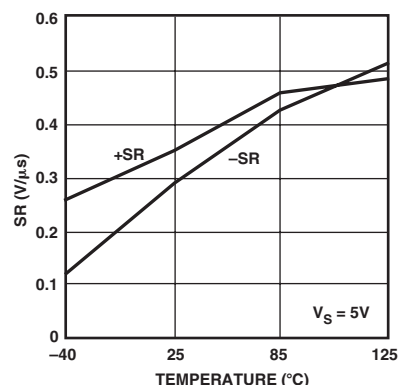


TPC 32. OP291 Slew Rate vs. Temperature, $V_S = 5\text{ V}$

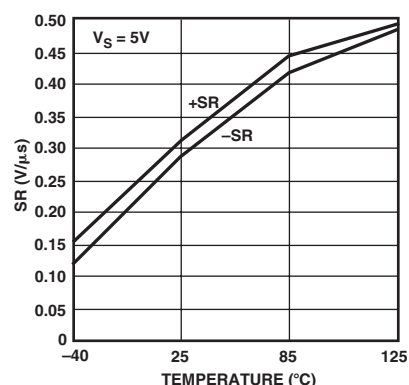


TPC 33. OP491 Slew Rate vs. Temperature, $V_S = 5\text{ V}$

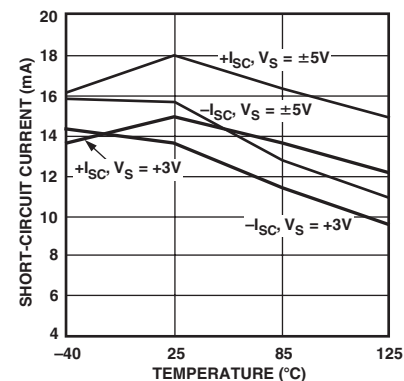

TPC 34. Short-Circuit Current vs. Temperature, $V_S = +3\text{ V}, +5\text{ V}, \pm 5\text{ V}$

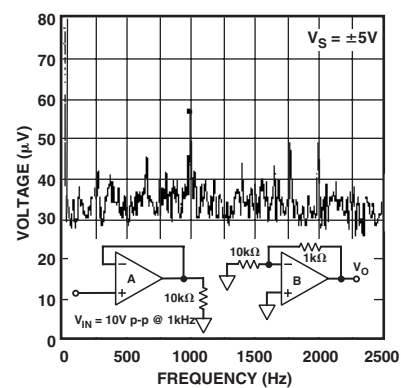


TPC 35. Channel Separation, $V_S = \pm 5\text{ V}$

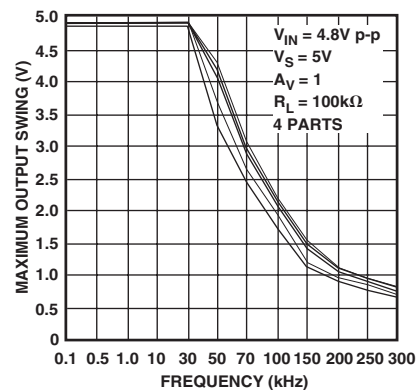


TPC 36. Maximum Output Swing vs. Frequency, $V_S = 5\text{ V}$


OP191/OP291/OP491

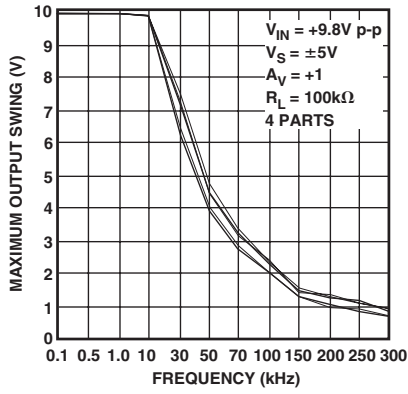


TPC 37. Maximum Output Swing vs. Frequency, $V_S = \pm 5V$

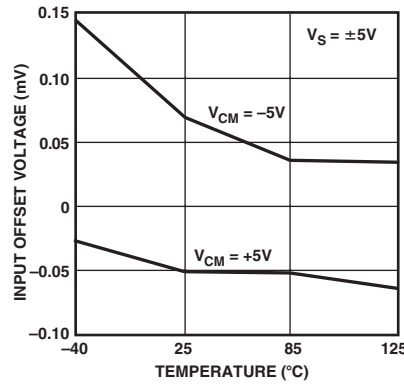


TPC 38. Input Offset Voltage vs. Temperature, $V_S = \pm 5V$

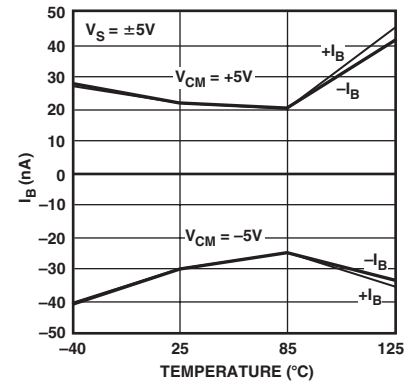


TPC 39. Input Bias Current vs. Temperature, $V_S = \pm 5V$

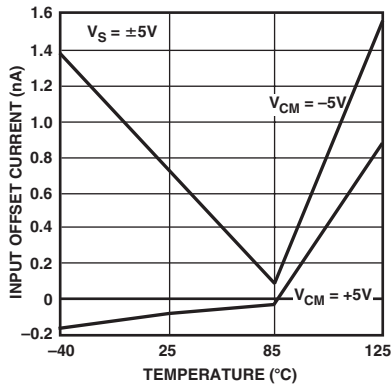


TPC 40. Input Offset Current vs. Temperature, $V_S = \pm 5V$

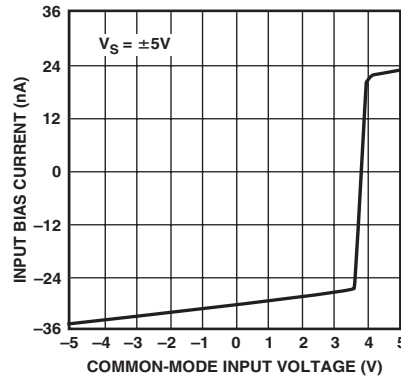


TPC 41. Input Bias Current vs. Common-Mode Voltage, $V_S = \pm 5V$

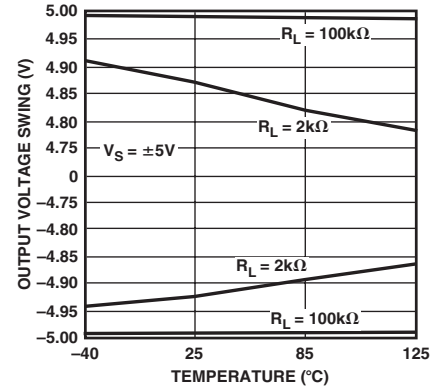


TPC 42. Output Voltage Swing vs. Temperature, $V_S = \pm 5V$

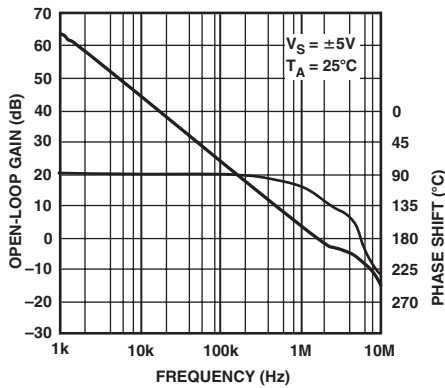


TPC 43. Open-Loop Gain and Phase vs. Frequency, $V_S = \pm 5V$

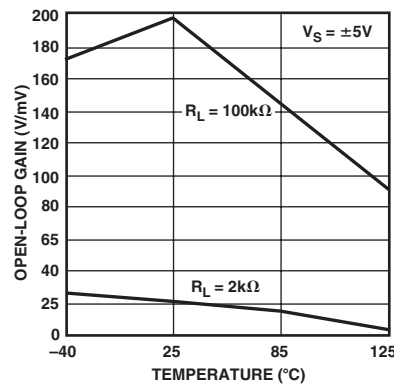


TPC 44. Open-Loop Gain vs. Temperature, $V_S = \pm 5V$

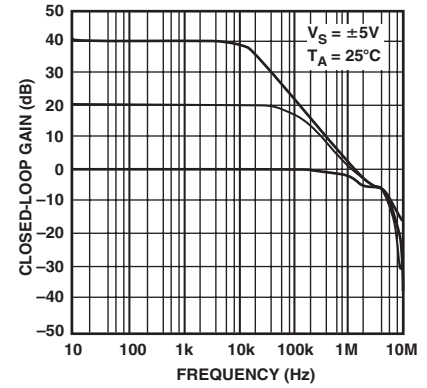


TPC 45. Closed-Loop Gain vs. Frequency, $V_S = \pm 5V$

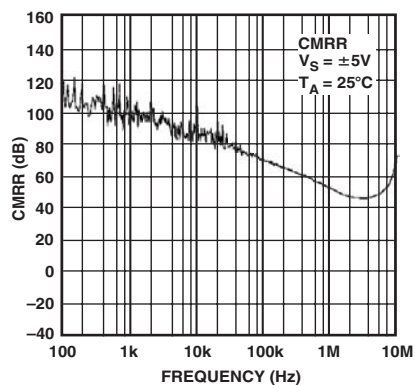


TPC 46. CMRR vs. Frequency, $V_S = \pm 5\text{ V}$

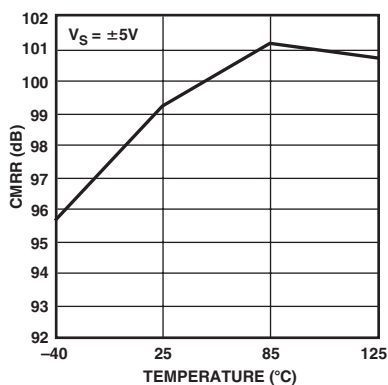


TPC 47. CMRR vs. Temperature, $V_S = \pm 5\text{ V}$

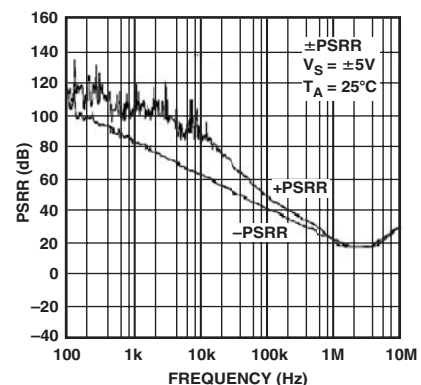


TPC 48. PSRR vs. Frequency, $V_S = \pm 5\text{ V}$

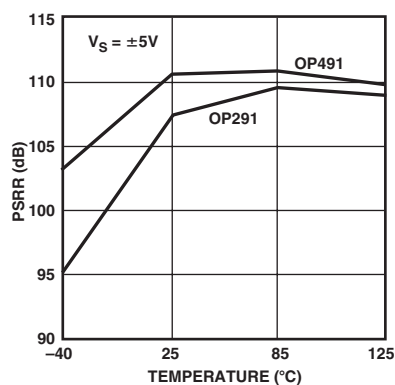


TPC 49. OP291/OP491 PSRR vs. Temperature, $V_S = \pm 5\text{ V}$

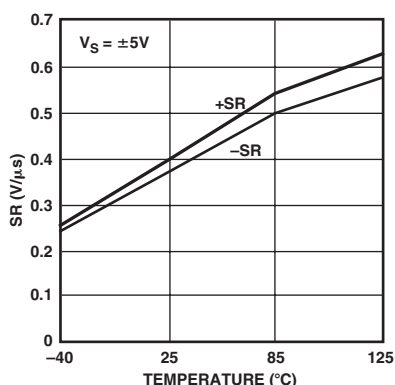


TPC 50. Slew Rate vs. Temperature, $V_S = \pm 5\text{ V}$

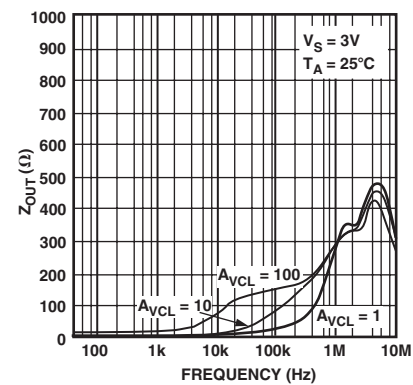

TPC 51. Output Impedance vs. Frequency

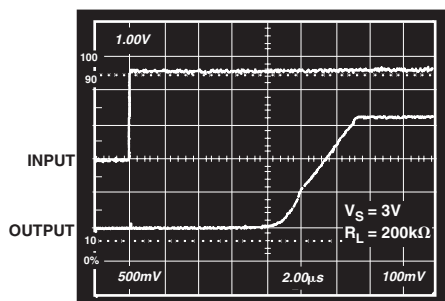

TPC 52. Large Signal Transient Response, $V_S = 3\text{ V}$

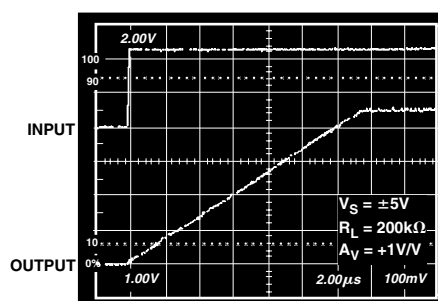

TPC 53. Large Signal Transient Response, $V_S = \pm 5\text{ V}$

OP191/OP291/OP491

FUNCTIONAL DESCRIPTION

The OP191/OP291/OP491 are single-supply, micropower amplifiers featuring rail-to-rail inputs and outputs. In order to achieve wide input and output ranges, these amplifiers employ unique input and output stages. As the simplified schematic (Figure 2) shows, the input stage is comprised of two differential pairs, a PNP pair and an NPN pair. These two stages do not work in parallel. Instead, only one or the other stage is on for any given input signal level. The PNP stage (transistors Q1 and Q2) is required to ensure that the amplifier remains in the linear region when the input voltage approaches and reaches the negative rail. On the other hand, the NPN stage (transistors Q5 and Q6) is needed for input voltages up to and including the positive rail.

For the majority of the input common-mode range, the PNP stage is active, as is evidenced by examining the graph of Input Bias Current vs. Common-Mode Voltage. Notice that the bias current switches direction at approximately 1.2 V to 1.3 V below the positive rail. At voltages below this, the bias current flows out of the OP291, indicating a PNP input stage. Above this voltage, however, the bias current enters the device, revealing the NPN stage. The actual mechanism within the amplifier for switching between the input stages is comprised of the transistors Q3, Q4, and Q7. As the input common-mode voltage increases, the emitters of Q1 and Q2 follow that voltage plus a diode drop. Eventually the emitters of Q1 and Q2 are high enough to turn on Q3, which diverts the 8 μ A of tail current away from the PNP input stage, turning it off. Instead, the current is mirrored through Q4 and Q7 to activate the NPN input stage.

Notice that the input stage includes 5 k Ω series resistors and differential diodes, a common practice in bipolar amplifiers to protect the input transistors from large differential voltages. These diodes turn on whenever the differential voltage

exceeds approximately 0.6 V. In this condition, current flows between the input pins, limited only by the two 5 k Ω resistors. This characteristic is important in circuits where the amplifier may be operated open-loop, such as a comparator. Evaluate each circuit carefully to make sure that the increase in current does not affect the performance.

The output stage of the OP191 family uses a PNP and an NPN transistor as do most output stages; however, the output transistors, Q32 and Q33, are actually connected with their collectors to the output pin to achieve the rail-to-rail output swing. As the output voltage approaches either the positive or negative rail, these transistors begin to saturate. Thus, the final limit on output voltage is the saturation voltage of these transistors, which is about 50 mV. The output stage does have inherent gain arising from the collectors and any external load impedance. Because of this, the open-loop gain of the amplifier is dependent on the load resistance.

Input Overvoltage Protection

As with any semiconductor device, whenever the condition exists for the input to exceed either supply voltage, attention needs to be paid to the input overvoltage characteristic. When an overvoltage occurs, the amplifier could be damaged depending on the voltage level and the magnitude of the fault current. Figure 3 shows the characteristics for the OP191 family. This graph was generated with the power supplies at ground and a curve tracer connected to the input. As can be seen, when the input voltage exceeds either supply by more than 0.6 V, internal PN junctions energize, allowing current to flow from the input to the supplies. As described above, the OP291/OP491 does have 5 k Ω resistors in series with each input, which helps limit the current. Calculating the slope of the current versus voltage in the graph confirms the 5 k Ω resistor.

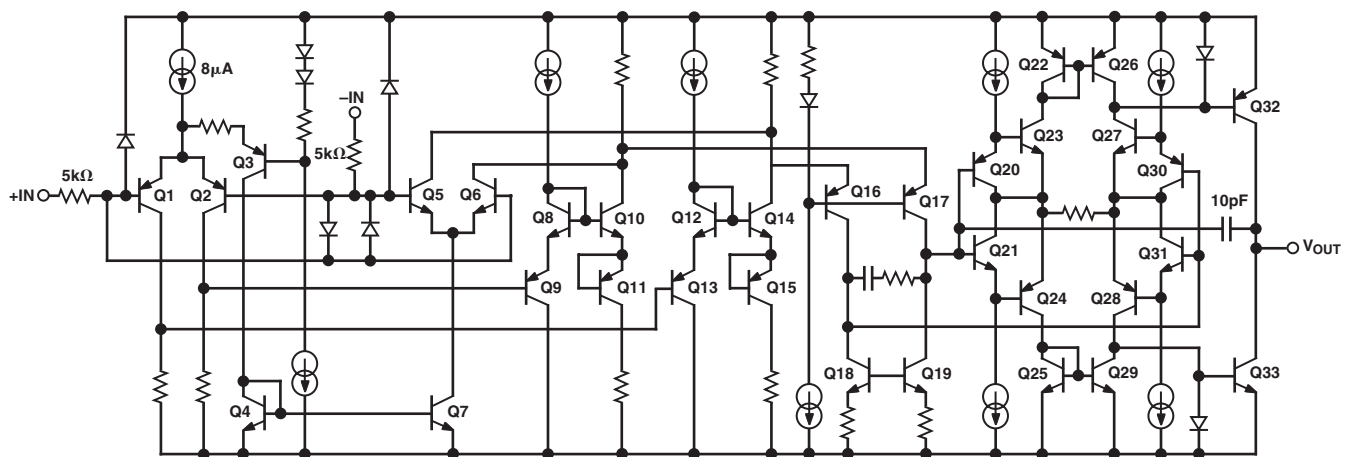


Figure 2. Simplified Schematic

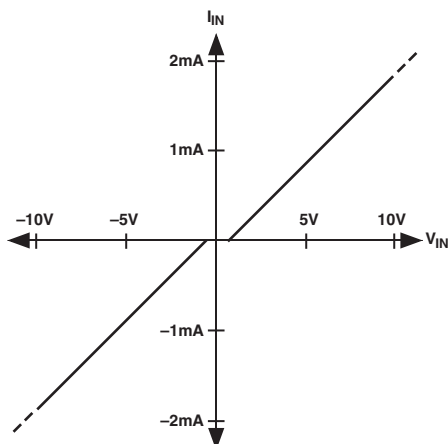


Figure 3. Input Overvoltage Characteristics

This input current is not inherently damaging to the device as long as it is limited to 5 mA or less. In the case shown, for an input of 10 V over the supply, the current is limited to 1.8 mA. If the voltage is large enough to cause more than 5 mA of current to flow, then an external series resistor should be added. The size of this resistor is calculated by dividing the maximum overvoltage by 5 mA and subtracting the internal 5 k Ω resistor. For example, if the input voltage could reach 100 V, the external resistor should be $(100 \text{ V}/5 \text{ mA}) - 5 \text{ k} = 15 \text{ k}\Omega$. This resistance should be placed in series with either or both inputs if they are subjected to the overvoltages. For more information on general overvoltage characteristics of amplifiers, refer to the *1993 System Applications Guide*, available from the Analog Devices Literature Center.

Output Voltage Phase Reversal

Some operational amplifiers designed for single-supply operation exhibit an output voltage phase reversal when their inputs are driven beyond their useful common-mode range. Typically for single-supply bipolar op amps, the negative supply determines the lower limit of their common-mode range. With these devices, external clamping diodes with the anode connected to

ground and the cathode to the inputs prevent input signal excursions from exceeding the device's negative supply (i.e., GND), preventing a condition that could cause the output voltage to change phase. JFET input amplifiers may also exhibit phase reversal, and, if so, a series input resistor is usually required to prevent it.

The OP191 family is free from reasonable input voltage range restrictions due to its novel input structure. In fact, the input signal can exceed the supply voltage by a significant amount without causing damage to the device. As illustrated in Figure 4, the OP191 family can safely handle a 20 V p-p input signal on $\pm 5 \text{ V}$ supplies without exhibiting any sign of output voltage phase reversal or other anomalous behavior. Thus no external clamping diodes are required.

Overdrive Recovery

The overdrive recovery time of an operational amplifier is the time required for the output voltage to recover to its linear region from a saturated condition. This recovery time is important in applications where the amplifier must recover quickly after a large transient event, such as a comparator. The circuit shown in Figure 5 was used to evaluate the OP191 family's overload recovery time. The OP191 family takes approximately 8 μs to recover from positive saturation and approximately 6.5 μs to recover from negative saturation.

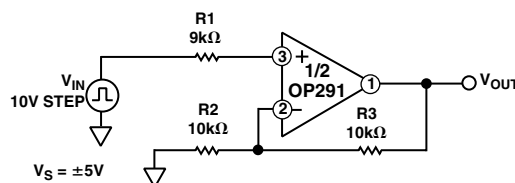


Figure 5. Overdrive Recovery Time Test Circuit

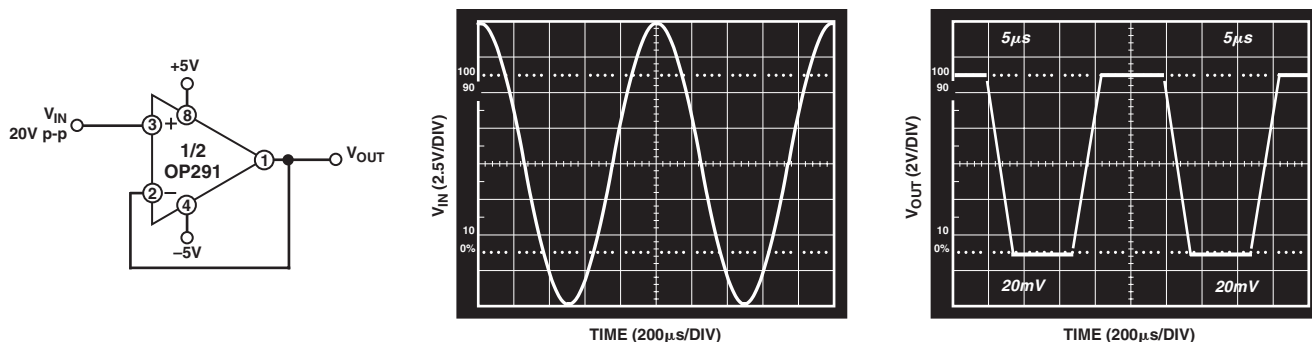


Figure 4. Output Voltage Phase Reversal Behavior

OP191/OP291/OP491

APPLICATIONS

Single 3 V Supply, Instrumentation Amplifier

The OP291's low supply current and low voltage operation make it ideal for battery-powered applications, such as the instrumentation amplifier shown in Figure 6. The circuit uses the classic two op amp instrumentation amplifier topology, with four resistors to set the gain. The equation is simply that of a noninverting amplifier as shown in the figure. The two resistors labeled R1 should be closely matched to each other as well as both resistors labeled R2 to ensure good common-mode rejection performance. Resistor networks ensure the closest matching as well as matched drifts for good temperature stability. Capacitor C1 is included to limit the bandwidth and, therefore, the noise in sensitive applications. The value of this capacitor should be adjusted depending on the desired closed-loop bandwidth of the instrumentation amplifier. The RC combination creates a pole at a frequency equal to $1/(2\pi \times R1C1)$. If AC-CMRR is critical, then a matched capacitor to C1 should be included across the second resistor labeled R1.

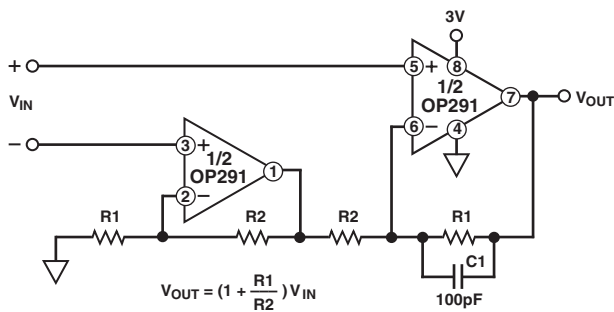


Figure 6. Single 3 V Supply Instrumentation Amplifier

Because the OP291 accepts rail-to-rail inputs, the input common-mode range includes both ground and the positive supply of 3 V. Furthermore, the rail-to-rail output range ensures the widest signal range possible and maximizes the dynamic range of the system. Also, with its low supply current of 300 μ A/device, this circuit consumes a quiescent current of only 600 μ A yet still exhibits a gain bandwidth of 3 MHz.

A question may arise about other instrumentation amplifier topologies for single-supply applications. For example, a variation on this topology adds a fifth resistor between the two inverting inputs of the op amps for gain setting. While that topology works well in dual-supply applications, it is inherently inappropriate for single-supply circuits. The same could be said for the traditional three op amp instrumentation amplifier. In both cases, the circuits simply cannot work in single-supply situations unless a false ground between the supplies is created.

Single-Supply RTD Amplifier

The circuit in Figure 7 uses three op amps of the OP491 to develop a bridge configuration for an RTD amplifier that operates from a single 5 V supply. The circuit takes advantage of the OP491's wide output swing range to generate a high bridge excitation voltage of 3.9 V. In fact, because of the rail-to-rail output swing, this circuit works with supplies as low as 4.0 V. Amplifier A1 serves the bridge to create a constant excitation current in conjunction with the AD589, a 1.235 V precision reference. The op amp maintains the reference voltage across the parallel combination of the 6.19 k Ω and 2.55 M Ω resistors, which generates a 200 μ A current source. This current splits evenly and flows through both halves of the bridge. Thus, 100 μ A flows through the RTD to generate an output voltage based on its resistance. A 3-wire RTD is used to balance the line resistance in both 100 Ω legs of the bridge to improve accuracy.

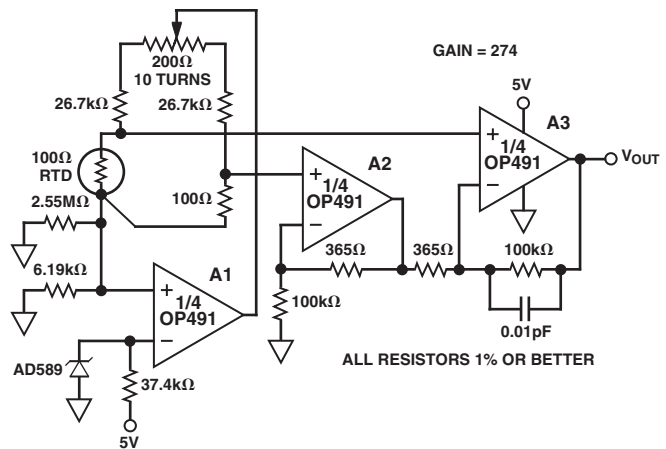


Figure 7. Single-Supply RTD Amplifier

Amplifiers A2 and A3 are configured in the two op amp IA discussed above. Their resistors are chosen to produce a gain of 274, such that each 1°C increase in temperature results in a 10 mV change in the output voltage, for ease of measurement. A 0.01 μ F capacitor is included in parallel with the 100 k Ω resistor on amplifier A3 to filter out any unwanted noise from this high gain circuit. This particular RC combination creates a pole at 1.6 kHz.

A 2.5 V Reference from a 3 V Supply

In many single-supply applications, the need for a 2.5 V reference often arises. Many commercially available monolithic 2.5 V references require a minimum operating supply voltage of 4 V. The problem is exacerbated when the minimum operating system supply voltage is 3 V. The circuit illustrated in Figure 8 is an example of a 2.5 V reference that operates from a single 3 V supply. The circuit takes advantage of the OP291's rail-to-rail input and output voltage ranges to amplify an AD589's 1.235 V output to 2.5 V. The OP291's low TCV_{OS} of $1 \mu V/^{\circ}C$ helps maintain an output voltage temperature coefficient of less than $200 \text{ ppm}/^{\circ}C$. The circuit's overall temperature coefficient is dominated by R_2 and R_3 's temperature coefficient. Lower temperature coefficient resistors are recommended. The entire circuit draws less than $420 \mu A$ from a 3 V supply at $25^{\circ}C$.

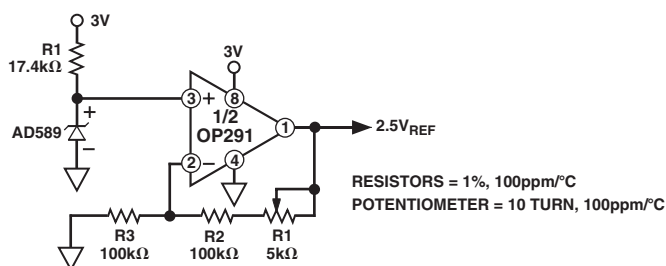


Figure 8. A 2.5 V Reference that Operates on a Single 3 V Supply

5 V Only, 12-Bit DAC Swings Rail-to-Rail

The OP191 family is ideal for use with a CMOS DAC to generate a digitally controlled voltage with a wide output range. Figure 9 shows the DAC8043 used in conjunction with the AD589 to generate a voltage output from 0 V to 1.23 V. The DAC is operated in voltage switching mode, where the reference is connected to the current output, I_{OUT} , and the output voltage is taken from the V_{REF} pin. This topology is inherently noninverting as opposed to the classic current output mode, which is inverting and, therefore, unsuitable for single supply.

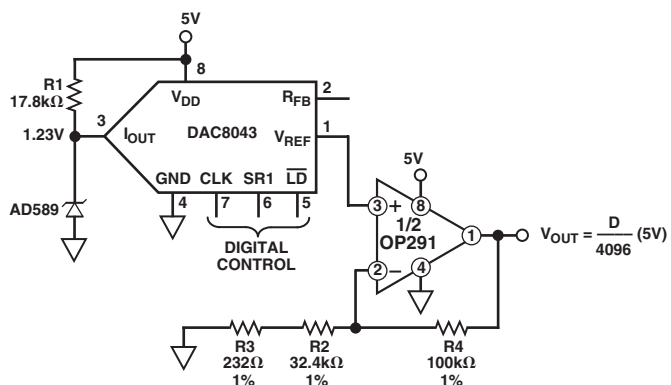


Figure 9. 5 V Only, 12-Bit DAC Swings Rail-to-Rail

The OP291 serves two functions. First, it is required to buffer the high output impedance of the DAC's V_{REF} pin, which is on the order of $10 k\Omega$. The op amp provides a low impedance output to drive any following circuitry. Second, the op amp amplifies the output signal to provide a rail-to-rail output swing. In this particular case, the gain is set to 4.1 to generate a 5.0 V output when the DAC is at full scale. If other output voltage ranges are needed, such as 0 V to 4.095 V, the gain can easily be adjusted by altering the value of the resistors.

A High-Side Current Monitor

In the design of power supply control circuits, a great deal of design effort is focused on ensuring a pass transistor's long-term reliability over a wide range of load current conditions. As a result, monitoring and limiting device power dissipation is of prime importance in these designs. The circuit illustrated in Figure 10 is an example of a 5 V, single-supply, high-side current monitor that can be incorporated into the design of a voltage regulator with fold-back current limiting or a high current power supply with crowbar protection. This design uses an OP291's rail-to-rail input voltage range to sense the voltage drop across a 0.1Ω current shunt. A p-channel MOSFET used as the feedback element in the circuit converts the op amp's differential input voltage into a current. This current is then applied to R_2 to generate a voltage that is a linear representation of the load current. The transfer equation for the current monitor is given by

$$\text{Monitor Output} = R_2 \times \left(\frac{R_{\text{SENSE}}}{R_1} \right) \times I_L$$

For the element values shown, the monitor output's transfer characteristic is 2.5 V/A.

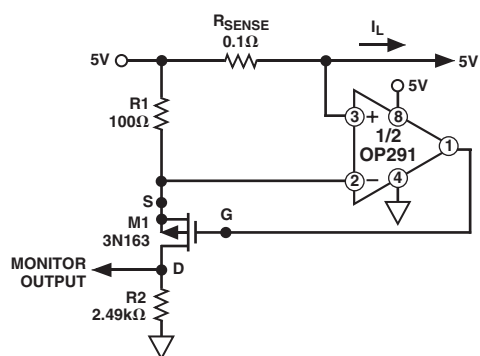


Figure 10. A High-Side Load Current Monitor

OP191/OP291/OP491

A 3 V, Cold Junction Compensated Thermocouple Amplifier

The OP291's low supply operation makes it ideal for 3 V battery-powered applications such as the thermocouple amplifier shown in Figure 11. The K-type thermocouple terminates in an isothermal block where the junctions' ambient temperature is continuously monitored using a simple 1N914 diode. The diode corrects the thermal EMF generated in the junctions by feeding a small voltage, scaled by the 1.5 M Ω and 475 Ω resistors, to the op amp.

To calibrate this circuit, immerse the thermocouple measuring junction in a 0°C ice bath and adjust the 500 Ω potentiometer to 0 V out. Next, immerse the thermocouple in a 250°C temperature bath or oven and adjust the scale adjust potentiometer for an output voltage of 2.50 V. Within this temperature range, the K-type thermocouple is accurate to within $\pm 3^\circ\text{C}$ without linearization.

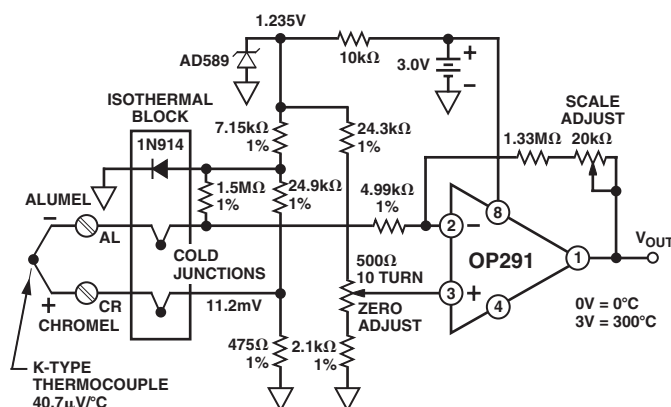


Figure 11. A 3 V, Cold-Junction Compensated Thermocouple Amplifier

Single-Supply, Direct Access Arrangement for Modems

An important building block in modems is the telephone line interface. In the circuit shown in Figure 12, a direct access arrangement is used for transmitting and receiving data from the telephone line. Amplifier A1 is the receiving amplifier, and amplifiers A2 and A3 are the transmitters. The fourth amplifier, A4, generates a pseudo ground halfway between the supply voltage and ground. This pseudo ground is needed for the ac-coupled bipolar input signals.

The transmit signal, TXA, is inverted by A2 and then reinverted by A3 to provide a differential drive to the transformer, where each amplifier supplies half the drive signal. This is needed because of the smaller swings associated with a single supply as opposed to a dual supply. Amplifier A1 provides some gain for the received signal, and it also removes the transmit signal present at the transformer from the receive signal. To do this, the drive signal from A2 is also fed to the noninverting input of A1 to cancel the transmit signal from the transformer.

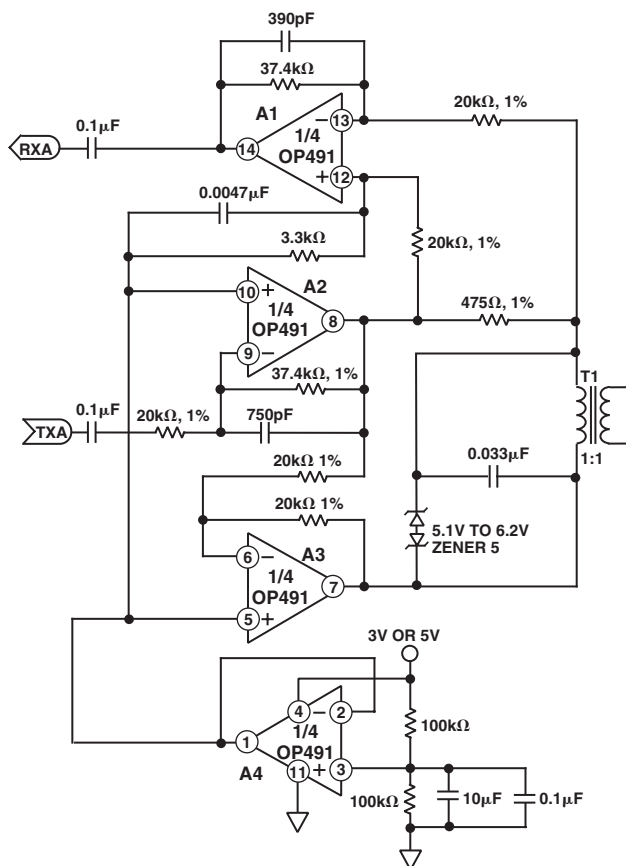


Figure 12. Single-Supply Direct Access Arrangement for Modems

The OP491's bandwidth of 3 MHz and rail-to-rail output swings ensure that it can provide the largest possible drive to the transformer at the frequency of transmission.

3 V, 50 Hz/60 Hz Active Notch Filter with False Ground

To process ac signals in a single-supply system, it is often best to use a false-ground biasing scheme. A circuit that uses this approach is illustrated in Figure 13. In this circuit, a false-ground circuit biases an active notch filter used to reject 50 Hz/60 Hz power line interference in portable patient monitoring equipment. Notch filters are quite commonly used to reject power line frequency interference that often obscures low frequency physiological signals, such as heart rates, blood pressure readings, EEGs, and EKGs. This notch filter effectively squelches 60 Hz pickup at a filter Q of 0.75. Substituting 3.16 k Ω resistors for the 2.67 k Ω resistors in the twin-T section (R1 through R5) configures the active filter to reject 50 Hz interference.

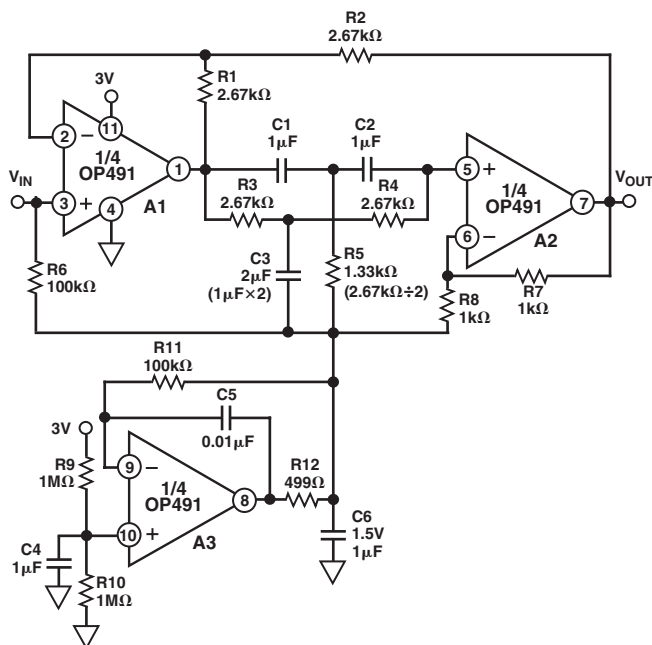


Figure 13. A 3 V Single-Supply, 50 Hz/60 Hz Active Notch Filter with False Ground

Amplifier A3 is the heart of the false ground bias circuit. It simply buffers the voltage developed by R9 and R10 and is the reference for the active notch filter. Since the OP491 exhibits a rail-to-rail input common-mode range, R9 and R10 are chosen to split the 3 V supply symmetrically. An in-the-loop compensation scheme used around the OP491 allows the op amp to drive C6, a 1 μ F capacitor, without oscillation. C6 maintains a low impedance ac ground over the operating frequency range of the filter.

The filter section uses a pair of OP491s in a twin-T configuration whose frequency selectivity is very sensitive to the relative matching of the capacitors and resistors in the twin-T section. Mylar is the material of choice for the capacitors, and the relative matching of the capacitors and resistors determines the filter's pass-band symmetry. Using 1% resistors and 5% capacitors produces satisfactory results.

Single-Supply, Half-Wave and Full-Wave Rectifiers

An OP191 family configured as a voltage follower operating on a single supply can be used as a simple half-wave rectifier in low frequency (<2 kHz) applications. A full-wave rectifier can be configured with a pair of OP291s as illustrated in Figure 14. The circuit works in the following way. When the input signal is above 0 V, the output of amplifier A1 follows the input signal. Since the noninverting input of amplifier A2 is connected to A1's output, op amp loop control forces the A2's inverting input to the same potential. The result is that both terminals of R1 are equipotential; i.e., no current flows. Since there is no current flow in R1, the same condition exists upon R2; thus, the output of the circuit tracks the input signal. When the input signal is below 0 V, the output voltage of A1 is forced to 0 V. This condition now forces A2 to operate as an inverting voltage follower because the noninverting terminal of A2 is at 0 V as well. The output voltage at V_{OUTA} is then a full-wave rectified version of the input signal. If needed, a buffered, half-wave rectified version of the input signal is available at V_{OUTB}.

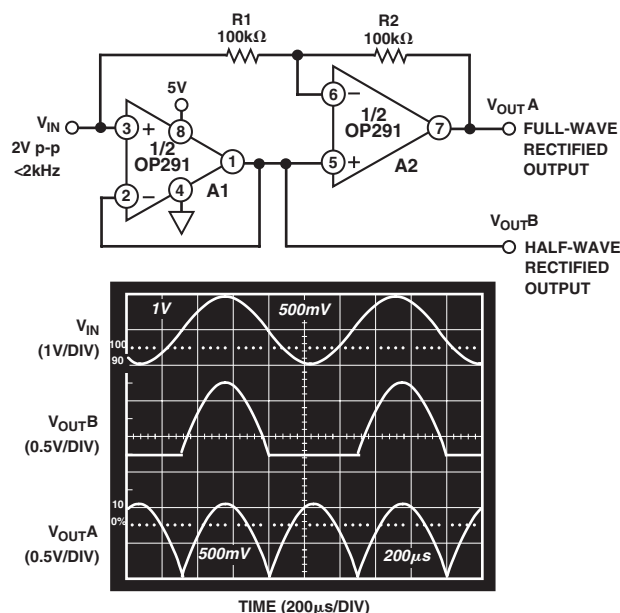


Figure 14. Single-Supply, Half-Wave and Full-Wave Rectifiers Using an OP291

OP191/OP291/OP491

* OP491 SPICE Macro-model REV. C, 5/94
* ARG/ADI

* Copyright 1994 by Analog Devices, Inc.

* Refer to "README.DOC" file for License Statement. Use of

* this model indicates your acceptance of the terms and provisions in the License Statement.

* Node assignments

```

*           noninverting input
*           |
*           |   inverting input
*           |   |
*           |   |   positive supply
*           |   |   |
*           |   |   |   negative supply
*           |   |   |   |
*           |   |   |   |   output
*
.SUBCKT OP491 1 2 99 50 45
```

* INPUT STAGE

```

I1  99  7  8.06E-6
Q1  6  4  7  QP
Q2  5  3  7  QP
D1  3  99  DX
D2  4  99  DX
D3  3  4  DX
D4  4  3  DX
R1  3  8  5E3
R2  4  2  5E3
R3  5  50  6.4654E3
R4  6  50  6.4654E3
EOS 8  1  POLY(1) (16,39) -0.08E-3 1
IOS 3  4  50E-12
GB1 3  98  (21,98) 50E-9
GB2 4  98  (21,98) 50E-9
CIN 1  2  1E-12
```

* 1ST GAIN STAGE

```

EREF 98  0  (39,0) 1
G1  98  9  (6,5) 31.667E-6
R7  9  98  1E6
EC1 99  10  POLY(1) (99,39) -0.52 1
EC2 11  50  POLY(1) (39,50) -0.52 1
D5  9  10  DX
D6  11  9  DX
```

* 2ND GAIN STAGE AND DOMINANT POLE AT 1.25 Hz

```

G2  98  12  (9,39) 8E-6
R8  12  98  276.311E6
C2  12  98  16E-12
D7  12  13  DX
D8  14  12  DX
V1  99  13  0.58
V2  14  50  0.58
```

* COMMON-MODE STAGE

```

ECM 15  98  POLY(2) (1,39) (2,39) 0 0.5 0.5
R9  15  16  1E6
```

R10 16 98 10

* POLE AT 2.5 MHz

```

G3  98  18  (12,39) 1E-6
R11 18  98  1E6
C4  18  98  63.662E-15
```

* BIAS CURRENT-VS-COMMON-MODE VOLTAGE

```

EP  97  0  (99,0) 1
VB  99  17  1.3
RB  17  50  1E9
E3  19  0  (15,17) 16
D13 19  20  DX
R12 20  0  1E6
G4  98  21  (20,0) 1E-3
R13 21  98  5E3
D14 21  22  DY
E4  97  22  (POLY(1) (99,98) -0.765 1
```

* POLE AT 100 MHz

```

G6  98  40  (18,39) 1E-6
R20 40  98  1E6
C10 40  98  1.592E-15
```

* OUTPUT STAGE


```

RS1 99  39  109.375E3
RS2 39  50  109.375E3
RO1 99  45  41.667
RO2 45  50  41.667
G7  45  99  (99,40) 24E-3
G8  50  45  (40,50) 24E-3
G9  98  60  (45,40) 24E-3
D9  60  61  DX
D10 62  60  DX
V7  61  98  DC 0
V8  98  62  DC 0
FSY 99  50  POLY(2) V7 V8 0.207E-3 1 1
D11 41  45  DZ
D12 45  42  DZ
V5  40  41  0.131
V6  42  40  0.131
.MODEL DX D()
.MODEL DY D(IS=1E-9)
.MODEL DZ D(IS=1E-6)
.MODEL QP PNP(BF=66.667)
.ENDS
```

OUTLINE DIMENSIONS

8-Lead Standard Small Outline Package [SOIC] Narrow Body [S-Suffix] (R-8)


Dimensions shown in millimeters and (inches)

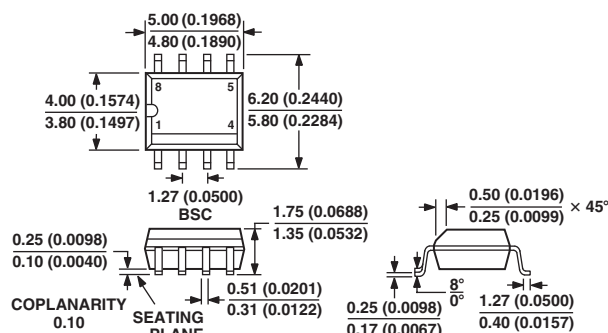

COMPLIANT TO JEDEC STANDARDS MS-012AA
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN

14-Lead Plastic Dual In-Line Package [PDIP] [P-Suffix] (N-14)


Dimensions shown in inches and (millimeters)

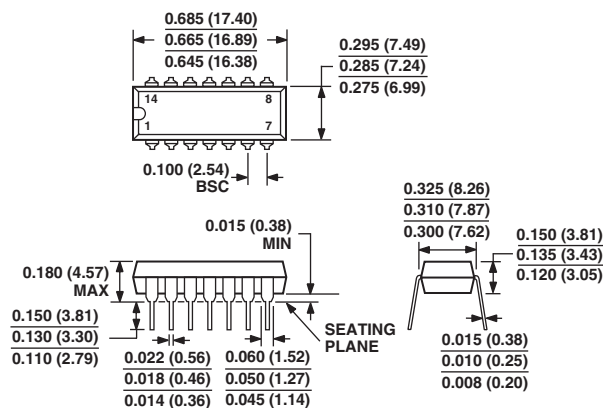

COMPLIANT TO JEDEC STANDARDS MO-095-AB
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN

14-Lead Standard Small Outline Package [SOIC] Narrow Body [S-Suffix] (R-14)


Dimensions shown in millimeters and (inches)

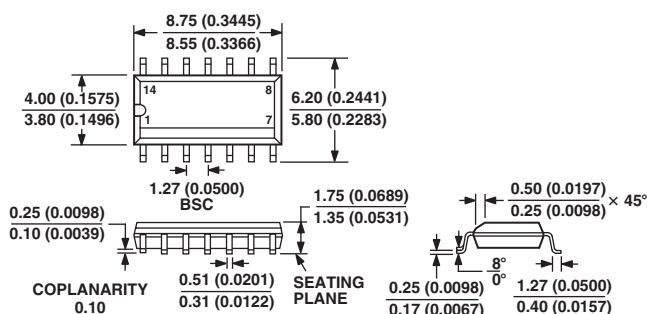

COMPLIANT TO JEDEC STANDARDS MS-012AB
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN

14-Lead Thin Shrink Small Outline Package [TSSOP] (RU-14)

Dimensions shown in millimeters

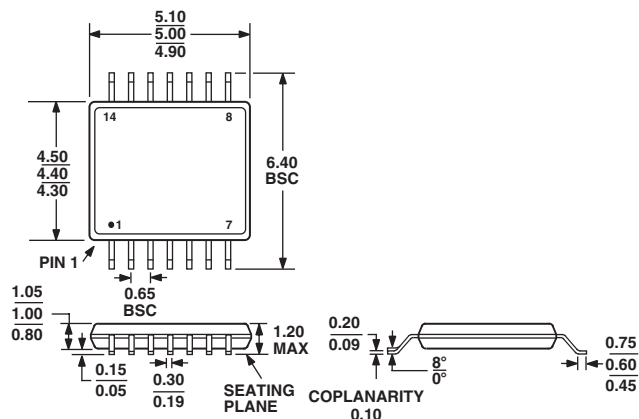

COMPLIANT TO JEDEC STANDARDS MO-153AB-1

OP191/OP291/OP491

Revision History

Location	Page
3/04—Data Sheet changed from REV. B to REV. C.	
Changes to OP291 SOIC PIN CONFIGURATION	1
11/03—Data Sheet changed from REV. A to REV. B.	
Edits to GENERAL DESCRIPTION	1
Edits to PIN CONFIGURATION	1
Changes to ORDERING GUIDE	5
Updated OUTLINE DIMENSIONS	19
12/02—Data Sheet changed from REV. 0 to REV. A.	
Edits to GENERAL DESCRIPTION	1
Edits to PIN CONFIGURATION	1
Edits to ORDERING GUIDE	5
Edits to DICE CHARACTERISTICS	5

C00294-0-3/04(C)