

PM30-48D DC-DC Converters

The PM30 is a DC-DC converter which provides a regulated output at power levels up to 30 watts. It accepts a wide range DC input and provides a fully isolated, regulated output. In operation, either (or neither) input pin, as well as either (or neither) output pin can be grounded. * PM30 units provide full output power for ambient temperatures up to 50°C, with linear derating from 50°C to zero power at 105°C. In forced air applications, full output power can be maintained as long as the chassis temperature, as measured in the center of the unit's label, is maintained at less than or equal to 100°C.


Note: For safety agency approval of the end use equipment to safety standards (such as UL 1950 3rd Edition, CAN/CSA C22.2 No. 950-95, DIN VDE 0805 and EN 60950), the output of the converter is ELV if the input to the converter is ELV; the output of the converter is SELV only if its input is SELV. The input and output are to be both floating or both grounded. The converter is to be protected by the specified fuse, provided in the ungrounded leg. The CE mark on the product is applied to show conformance to the requirements outlined in the European Union's low voltage directive (72/23/EEC) as amended by the CE mark directive (93/68/EEC).

Specifications:

ITEMS	MODEL	PM30-48D12		PM30-48D15	
		Output 1	Output 2	Output 1	Output 2
Nominal Output Voltage	V	+12	-12	+15	-15
Voltage Accuracy	-	± 1.5%			
Output Current (Power) @ 50°C	A/W	1.25 (15.0)		1.00 (15.0)	
Operating Temperature	-	-25°C to + 105°C. Derate linearly above + 50°C to 0 watts at 105°C			
Output Voltage Adjustment Range	V	Total o/p adj. Between 21.6 and 26.4		Total o/p adj. Between 27 and 33V	
Output Ripple (20MHz BW)	mV	25mV RMS / 100 mV p-p			
Line Regulation	mV	48 total output, 60 per output		60 total output, 75 per output	
Load Regulation (10% - 100%)	mV	240 total output, 360 total output		300 total output, 450 per output	
Remote On /Off	-	Logic 1 or open enables unit, logic 0 or short shuts unit down. Referenced to -Vin			
Temperature Coefficient	-	±0.015% / °C			
Overshoot	-	No overshoot at turn on, turn off, power failure or removal of a short circuit			
Input Voltage Range	-	36 – 75 Vdc			
Efficiency (Typical)	%	80			
No Load Input Power	W	0.4			
Conducted EMI	-	EN55022 Level B, FCC Level B with external filter			
Short Circuit Protection	-	Continuous			
Overvoltage Clamp Point (fixed)	V	30 max. (total output)		37.5 max. (total output)	
Isolation (Input to Output)	-	900Vac, 1500Vdc, 10MΩ			
Regulatory Agency Compliance**	-	ETSI-300-132-2, Bellcore GR-1089, UL1950 3 rd Edition, CAN/CSA C22.2 No. 950-95, EN 60950, VDE 0805			
Mounting & Connections	-	0.040" diameter, 0.22" long solderable pins			
Cover	-	0.032" anodized aluminum			
Size (W.H.D.)	in	2.5" x 3.0" x 0.335"			
Storage Temperature	-	-40°C to + 105°C			
Cooling	-	Convection cooling allows full o/p rating. Contact factory for rating w/external forced air			
Vibration	-	2.5G RMS,10Hz – 50 Hz, random vibration, 10 minutes per axis			
Relative Humidity	-	5% - 95%, non-condensing			
Altitude	-	10,000 feet max. operating / 45,000 feet max. storage			
Fungus Proofing	-	Units are inherently fungus inert			
Thermal Cycling	-	1 hour @ -25°C ramped to 1 hour @ +25°C ramped to 1 hour @ +100°C, 10 cycles ramp = 5°C/ minute			
Warranty	-	2 year warranty includes parts and labor			


****Regulatory Agency compliance testing is in process. Check individual unit's label for appropriate agency logos.**

Note: Regulation values pertain to operation with output currents above 10% of rated load current on main output and above 25% of rated output current on auxiliary outputs.

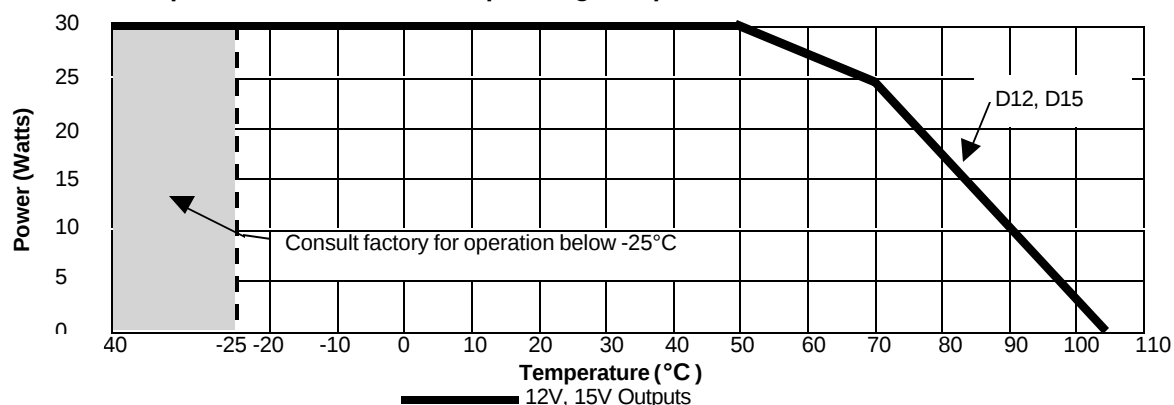Total Output Power vs. Ambient Operating Temperature

PM30-48D DC-DC Converters


Recommended Circuit Hook up:

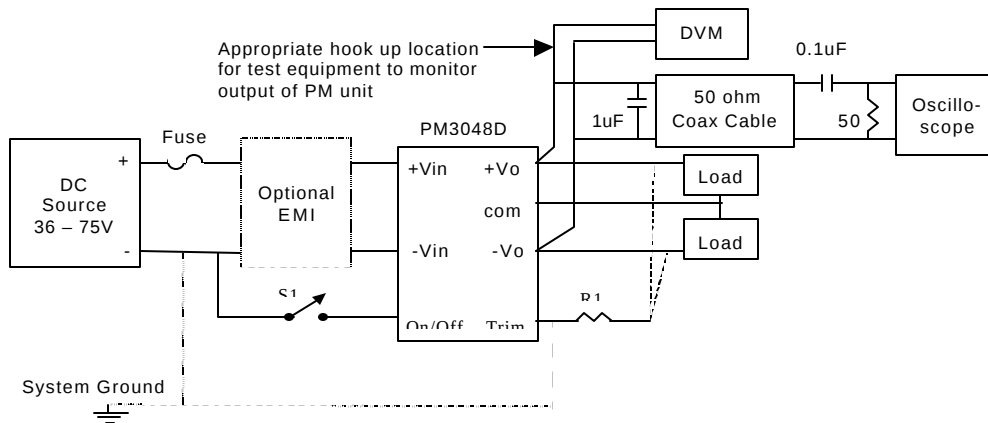


Notes:

1. Input can have -Vin, +Vin or neither terminal grounded. Input ground connection should be placed as close to PM unit input as possible.
2. Output can have -Vo, +Vo or neither terminal grounded. Output ground connection should be placed as close to PM unit input as possible.
3. Recommended input fusing: 2A (Buss PCB2, or equivalent).
4. Remote on/off control: low impedance path, or logic 0, referenced to -Vin disables unit output. Open circuit, or logic 1, referenced to -Vin enables output.
5. Output voltage programming: Resistor connected from Pin 5 to either -V or +V will generate increased or decreased output voltages, respectively, as follows.

PM3048D12 Voltage Trim Adjusts the total voltage (+) out to (-) out

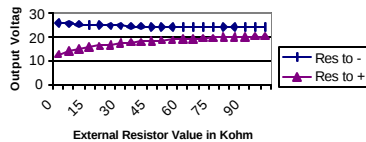

PM3048D15 Voltage Trim Adjusts the total voltage (+) out to (-) out

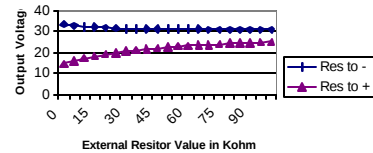

Mechanical Information:

PM30 units are designed for installation on printed wiring boards. The chassis has four tabs built in to provide clearance between the unit body and the PCB to allow for wave soldering. During wave soldering, the top surface of the board to which the PM unit is mounted (measured 1/2" from the edge of the PM unit) should be maintained at a temperature of no more than 180°C for no more than 30 seconds. The chassis of the PM unit is electrically isolated from both the input and output circuitry and should be left floating in a typical installation.

