


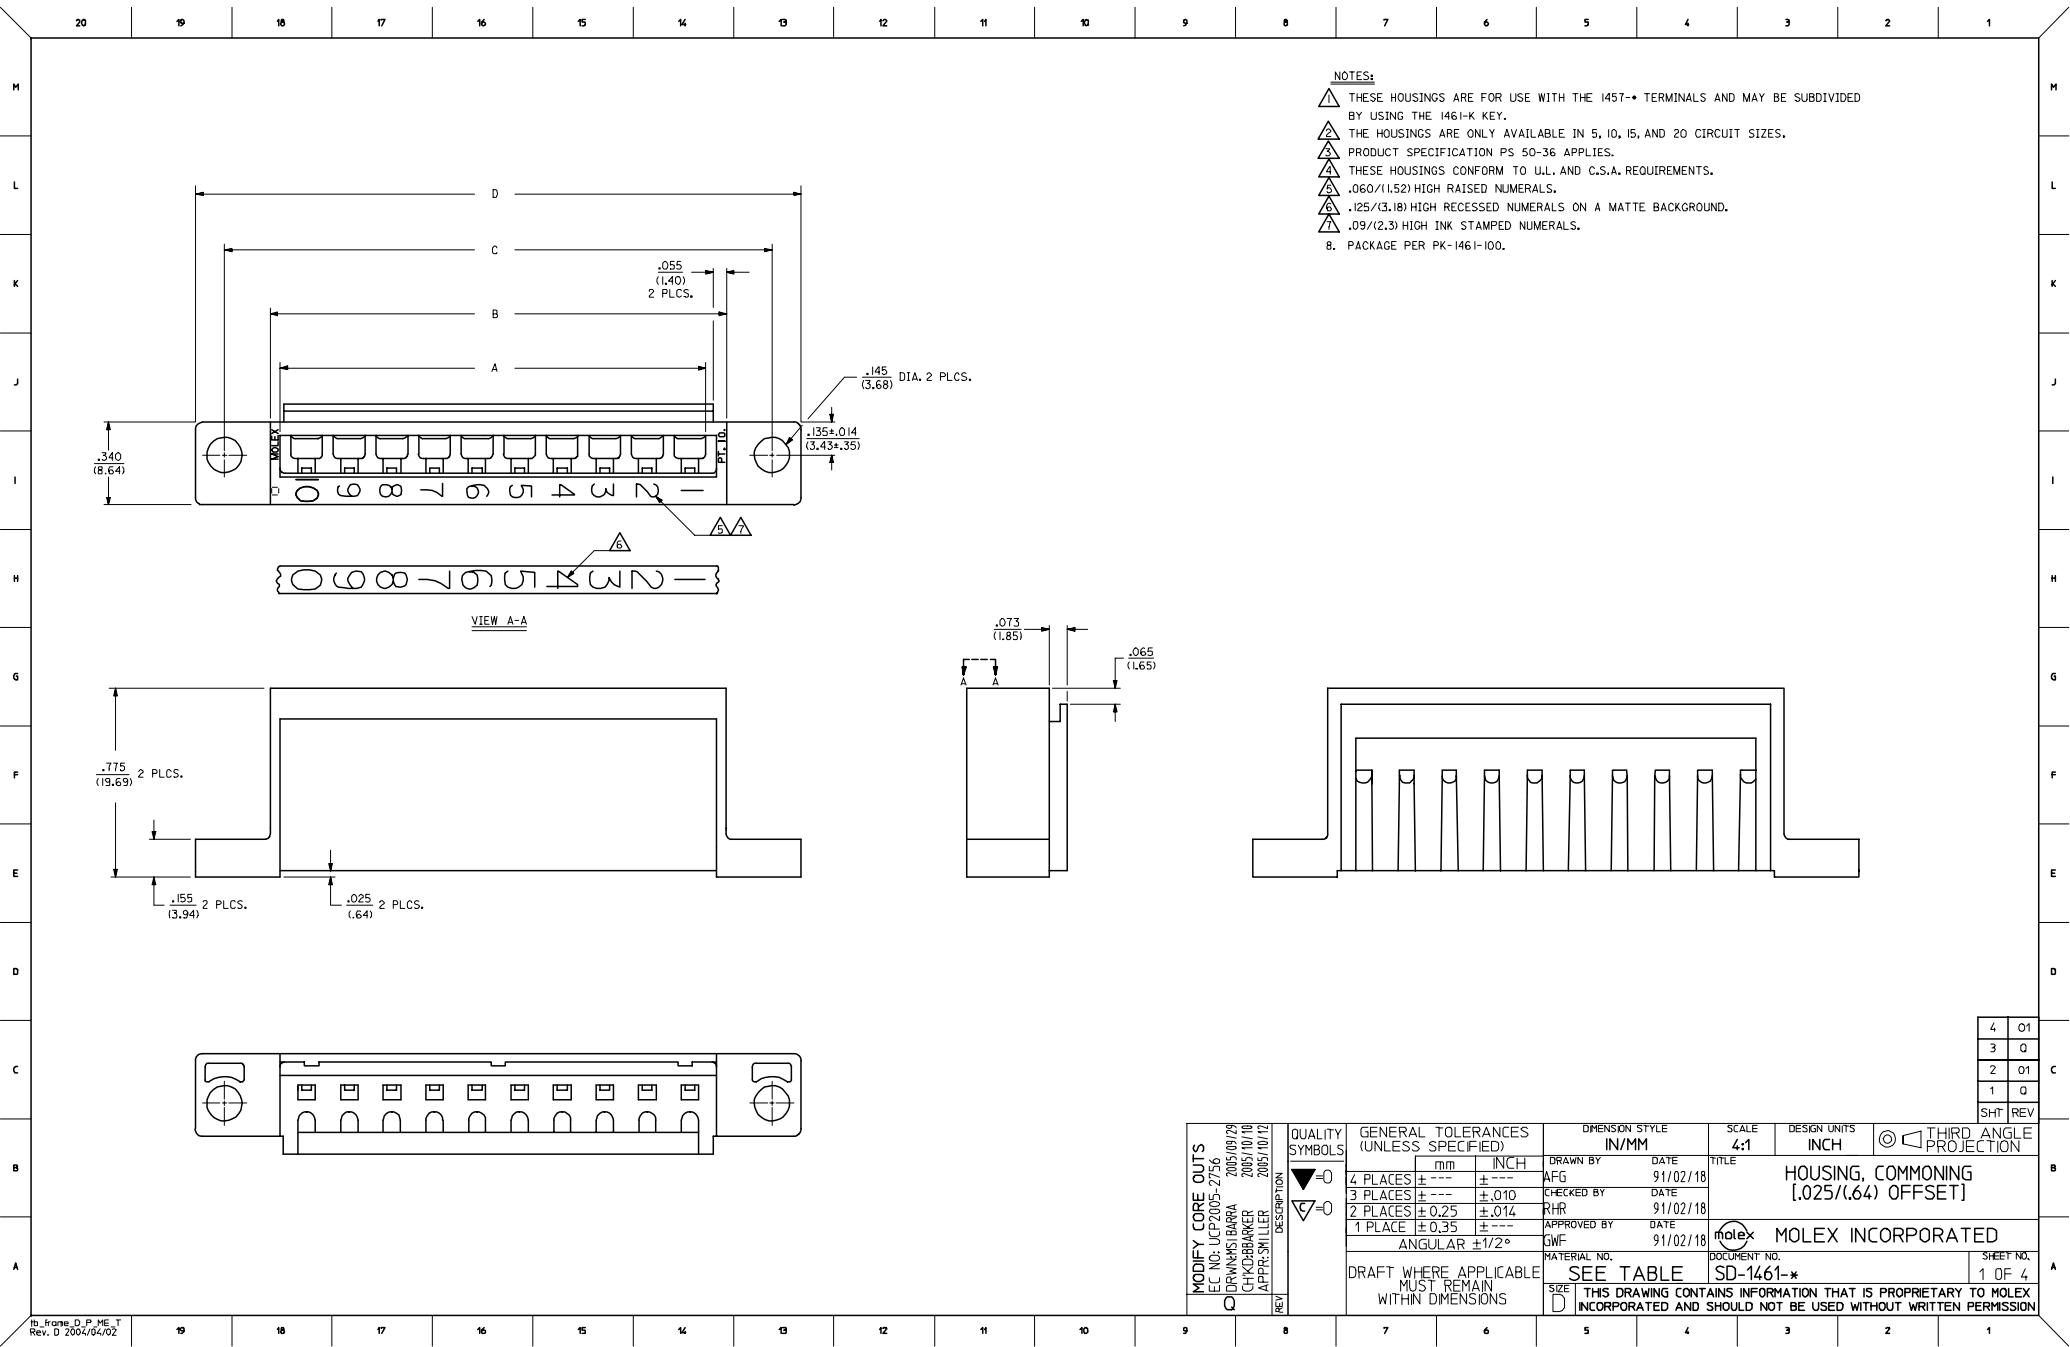

- NOTES:
- △ THESE HOUSINGS ARE FOR USE WITH THE 1457-• TERMINALS AND MAY BE SUBDIVIDED BY USING THE 1461-K KEY.
 - △ THE HOUSINGS ARE ONLY AVAILABLE IN 5, 10, 15, AND 20 CIRCUIT SIZES.
 - △ PRODUCT SPECIFICATION PS 50-36 APPLIES.
 - △ THESE HOUSINGS CONFORM TO U.L. AND C.S.A. REQUIREMENTS.
 - △ .060/(1.52) HIGH RAISED NUMERALS.
 - △ .125/(3.18) HIGH RECESSED NUMERALS ON A MATTE BACKGROUND.
 - △ .09/(2.3) HIGH INK STAMPED NUMERALS.
 - 8. PACKAGE PER PK-1461-100.

4	01
3	Q
2	01
1	Q
SHT REV	

MODIFY CORE OUTS EC NO: UCP2005-2756 Q DRWNS BARRA 2005/09/29 CHKD BARKER 2005/10/18 APPR: SKILLER 2005/10/12	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	TITLE HOUSING, COMMONING [.025/(.64) OFFSET]	DOCUMENT NO. SD-1461-*	SHEET NO. 1 OF 4			
		mm	INCH	DRAWN BY AFG	DATE 9/1/02/18									
		4 PLACES ± --- ± ---		CHECKED BY RHR	DATE 9/1/02/18									
		3 PLACES ± --- ± .010		APPROVED BY GWF	DATE 9/1/02/18									
		2 PLACES ± 0.25 ± .014												
		1 PLACE ± 0.35 ± ---												
		ANGULAR ± 1/2°												
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE										
		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

[illegible]