

ITS4300S-SJ-D

Smart High-Side NMOS-Power Switch

Data Sheet

Rev 1.0, 2012-09-01


Standard Power



1 Overview

Features

- CMOS compatible input
- Switching all types of resistive, inductive and capacitive loads
- Fast demagnetization of inductive loads
- Very low standby current
- Optimized Electromagnetic Compatibility (EMC)
- Open drain diagnostic output for overtemperature and short circuit
- Open load detection in OFF-state with external resistor
- Overload protection
- Current limitation
- Short circuit protection
- Thermal shutdown with restart
- Overvoltage protection (including load dump)
- Reverse battery protection with external resistor
- Loss of GND and loss of V_{bb} protection
- Electrostatic Discharge Protection (ESD)
- Green Product (RoHS compliant)

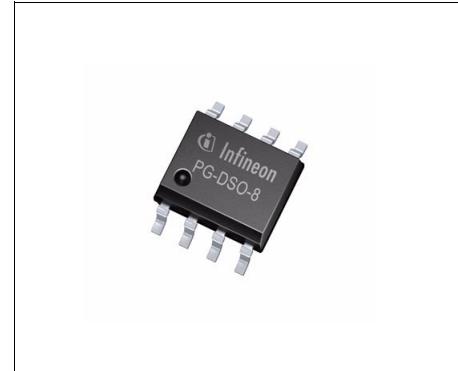

PG-DSO-8

ITS4300S-SJ-D is not qualified and manufactured according to the requirements of Infineon Technologies with regards to automotive and/or transportation applications.

Description

The ITS4300S-SJ-D is a protected single channel Smart High-Side NMOS-Power Switch in a PG-DSO-8 package with charge pump, CMOS compatible input and diagnostic feedback.

Product Summary

Overvoltage protection $V_{SAZmin} = 41V$

Operating voltage range: $5V < V_S < 34V$

On-state resistance $R_{DSON} = \text{typ } 300m\Omega$

Nominal load current $I_{LNOM} = 0.4A$

Operating Temperature range: $T_j = -40^\circ\text{C} \text{ to } 125^\circ\text{C}$

Standby Current: $I_{SSTB} = 26\mu\text{A}$

Application

- All types of resistive, inductive and capacitive loads
- Power switch for 12V and 24V DC applications with CMOS compatible control interface
- Driver for electromagnetic relays
- Power management for high-side-switching with low current consumption in OFF-mode

Type	Package	Marking
ITS4300S-SJ-D	PG-DSO-8	I300SD

2 Block Diagram and Terms

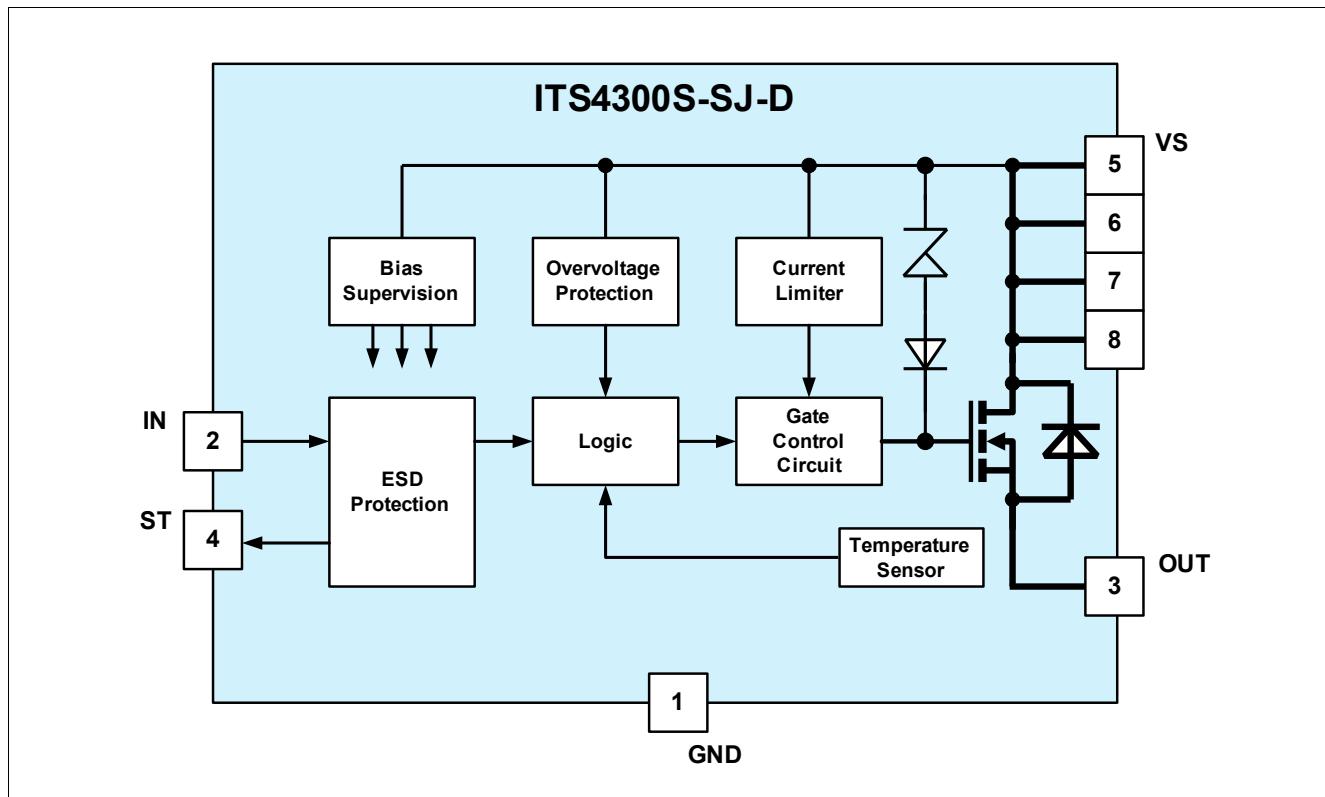


Figure 1 Block diagram

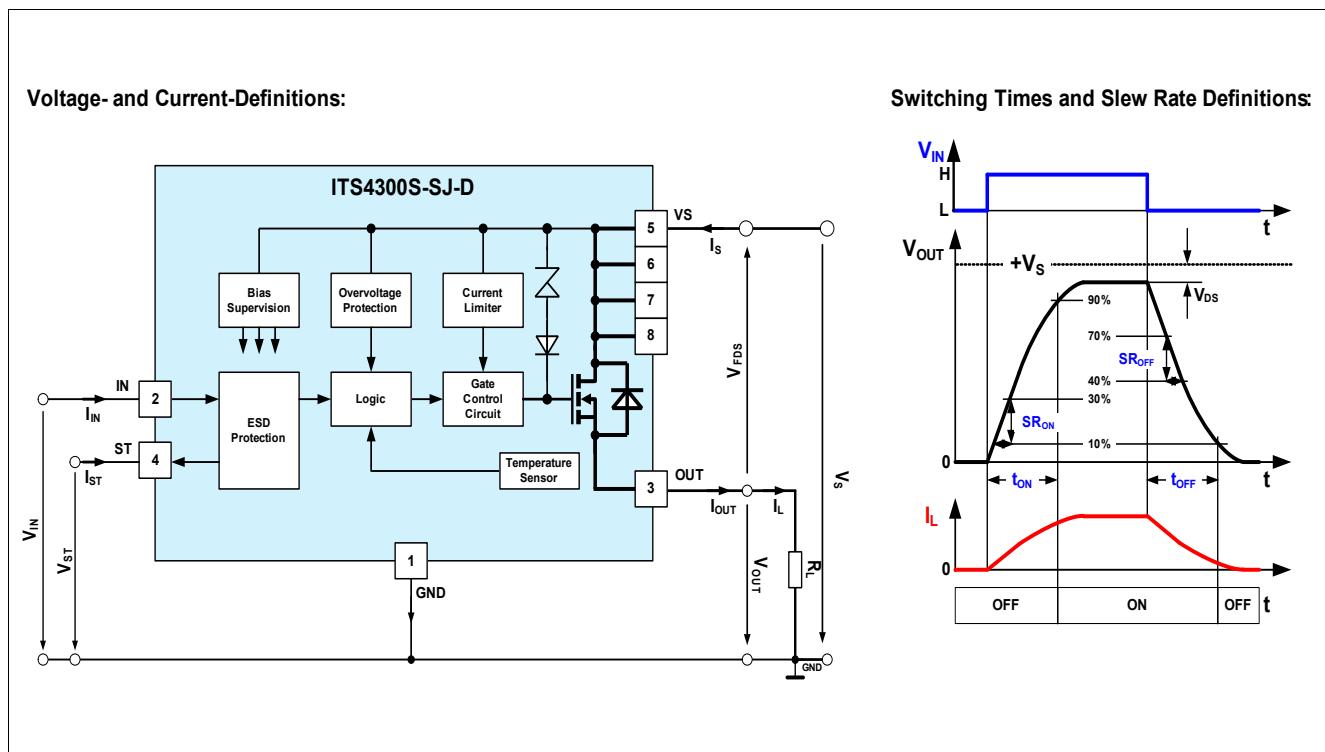


Figure 2 Terms - parameter definition

3 Pin Configuration

3.1 Pin Assignment

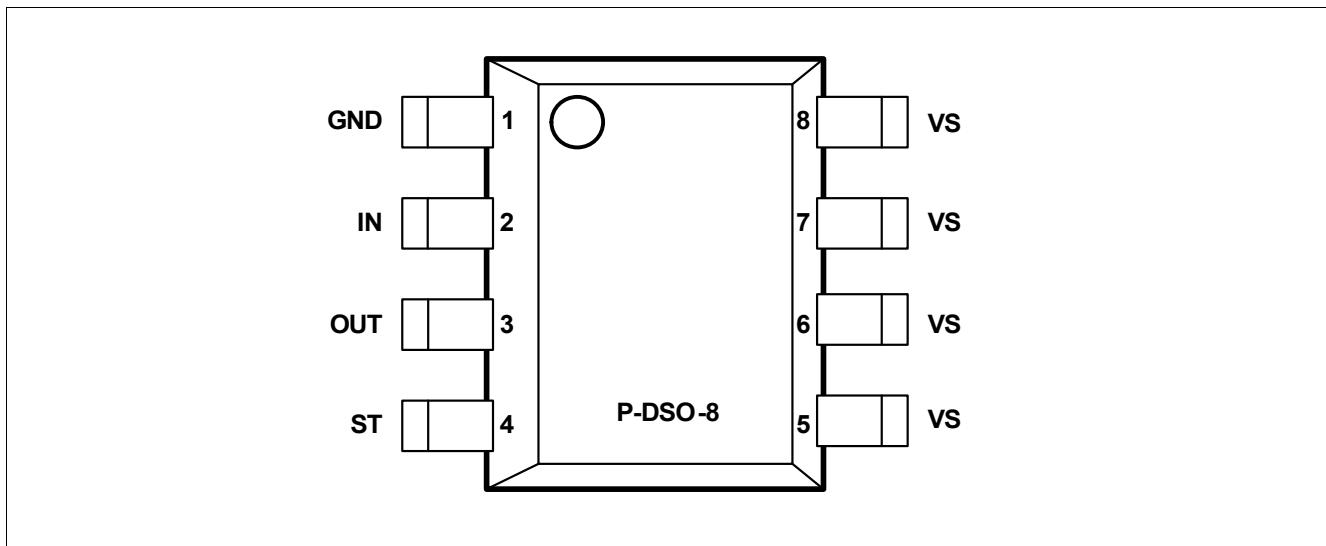


Figure 3 Pin configuration top view, PG-DSO-8

3.2 Pin Definitions and Functions

Pin	Symbol	Function
1	GND	Logic ground
2	IN	Input, controls the power switch; the powerswitch is ON when high
3	OUT	Output to the load
4	ST	Status flag; diagnosis feedback; NMOS open drain
5, 6, 7, 8	VS	Supply voltage (design the wiring for the maximum short circuit current and also for low thermal resistance)

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 1 Absolute maximum ratings¹⁾ at $T_j = 25^\circ\text{C}$ unless otherwise specified. Currents flowing into the device unless otherwise specified in chapter “Block Diagram and Terms”

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Supply voltage VS							
Voltage	V_S	–	–	40	V		4.1.1
Voltage for short circuit protection	V_{SSC}	–	–	28	V		4.1.2
Output stage OUT							
Output Current; (Short circuit current see electrical characteristics)	I_{OUT}	–	–	self limited	A		4.1.3
Input IN							
Voltage	V_{IN}	-10	–	16	V		4.1.4
Current	I_{IN}	-5	–	5	mA		4.1.5
Status ST							
Current	I_{ST}	-5	–	5	mA		4.1.6
Temperatures							
Junction Temperature	T_j	-40	–	125	°C		4.1.7
Storage Temperature	T_{stg}	-55	–	125	°C		4.1.8
Power dissipation							
$T_a = 25^\circ\text{C}^2)$	P_{tot}		–	1.4	W		4.1.9
Inductive load switch-off energy dissipation							
$T_j = 125^\circ\text{C}$; $V_S = 13.5\text{V}$; $IL = 0.3\text{A}^3)$	E_{AS}		–	800	mJ	single pulse	4.1.10
ESD Susceptibility							
ESD susceptibility (input pin)	V_{ESD}	-1	–	1	kV	HBM ⁴⁾	4.1.11
ESD susceptibility (all other pins)	V_{ESD}	-5	–	5	kV	HBM ⁴⁾	4.1.12

- 1) Not subject to production test, specified by design
- 2) Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6 cm² (one layer, 70mm thick) copper area for V_{bb} connection. PCB is vertical without blown air
- 3) Not subject to production test, specified by design
- 4) ESD susceptibility HBM according to EIA/JESD 22-A 114.

Note: Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as “outside” the normal operating range. Protection functions are neither designed for continuous nor repetitive operation.

4.2 Functional Range

Table 2 Functional Range

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Nominal Operating Voltage	V_S	5		34	V	V_S increasing	4.2.1

Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.

4.3 Thermal Resistance

This thermal data was generated in accordance to JEDEC JESD51 standards.

More information on www.jedec.org

Table 3 Thermal Resistance¹⁾

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Thermal Resistance - Junction to pin5	$R_{thj-pin5}$		34.5		K/W		4.3.1
Thermal Resistance - Junction to Ambient - 1s0p, minimal footprint	R_{thJA_1s0p}		145		K/W	²⁾	4.3.2
Thermal Resistance - Junction to Ambient - 1s0p, 300mm ²	$R_{thJA_1s0p_300mm}$		89		K/W	³⁾	4.3.3
Thermal Resistance - Junction to Ambient - 1s0p, 600mm ²	$R_{thJA_1s0p_600mm}$		78		K/W	⁴⁾	4.3.4
Thermal Resistance - Junction to Ambient - 2s2p	R_{thJA_2s2p}		85		K/W	⁵⁾	4.3.5
Thermal Resistance - Junction to Ambient with thermal vias - 2s2p	R_{thJA_2s2p}		60.4		K/W	⁶⁾	4.3.6

1) Not subject to production test, specified by design

2) Specified R_{thJA} value is according to Jedec JESD51-3 at natural convection on FR4 1s0p board, footprint; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 1x 70 μ m Cu.

3) Specified R_{thJA} value is according to Jedec JESD51-3 at natural convection on FR4 1s0p board, Cu, 300mm²; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 1x 70 μ m Cu.

4) Specified R_{thJA} value is according to Jedec JESD51-3 at natural convection on FR4 1s0p board, 600mm²; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 1x 70 μ m Cu.

5) Specified R_{thJA} value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 2 inner copper layers (2 x 70 μ m Cu, 2 x 35 μ m Cu).

6) Specified R_{thJA} value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board with two thermal vias; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 2 inner copper layers (2 x 70 μ m Cu, 2 x 35 μ m Cu). The diameter of the two vias are equal 0.3mm and have a plating of 25 μ m with a copper heatsink area of 3mm x 2mm). JEDEC51-7: The two plated-through hole vias should have a solder land of no less than 1.25 mm diameter with a drill hole of no less than 0.85 mm diameter.

5 Electrical Characteristics

Table 4 $V_S = 13.5V$; $T_j = -40^\circ\text{C}$ to 125°C ; all voltages with respect to ground. Currents flowing into the device unless otherwise specified in chapter “Block Diagram and Terms”. Typical values at $V_S = 13.5V$, $T_j = 25^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Powerstage							
NMOS ON Resistance	R_{DSON}		300	400	$\text{m}\Omega$	$I_{OUT} = 0.3\text{A}; T_j = 25^\circ\text{C}; 9\text{V} < V_S < 34\text{V}; V_{IN} = 5\text{V}$	5.0.1
NMOS ON Resistance	R_{DSON}		480	600	$\text{m}\Omega$	$I_{OUT} = 0.3\text{A}; T_j = 125^\circ\text{C}; 9\text{V} < V_S < 34\text{V}; V_{IN} = 5\text{V}$	5.0.2
Nominal Load Current; device on PCB ¹⁾	I_{LNOM}	0.4			A	$T_{pin5} = 85^\circ\text{C}$	5.0.3
Timings of Power Stages²⁾							
Turn ON Time(to 90% of V_{out}); L to H transition of V_{IN}	t_{ON}			140	μs	$V_S = 13.5\text{V}; R_L = 47\Omega$	5.0.4
Turn OFF Time (to 10% of V_{out}); H to L transition of V_{IN}	t_{OFF}			170	μs	$V_S = 13.5\text{V}; R_L = 47\Omega$	5.0.5
ON-Slew Rate (10 to 30% of V_{out}); L to H transition of V_{IN}	SR_{ON}			2.0	$\text{V}/\mu\text{s}$	$V_S = 13.5\text{V}; R_L = 47\Omega$	5.0.6
OFF-Slew Rate; dV_{OUT} / dt_{ON} (70 to 40% of V_{out}); H to L transition of V_{IN}	SR_{OFF}			2.0	$\text{V}/\mu\text{s}$	$V_S = 13.5\text{V}; R_L = 47\Omega$	5.0.7
Under voltage lockout (charge pump start-stop-restart)							
Supply undervoltage; charge pump stop voltage	V_{SUV}			5.5	V	V_S decreasing	5.0.8
Supply startup voltage; Charge pump restart voltage	V_{SSU}			5.5	V	V_S increasing	5.0.9
Current consumption							
Operating current	I_{GND}			1.3	mA	$V_{IN} = 5\text{V}$	5.0.10
Standby current	I_{SSTB}			26	μA	$V_{IN} = 0\text{V}; V_{OUT} = 0\text{V}$ $-40^\circ\text{C} < T_j < 85^\circ\text{C}$	5.0.11
Standby current	I_{SSTB}			26	μA	$V_{IN} = 0\text{V}; T_j = 125^\circ\text{C}$	5.0.12
Output leakage current	I_{OUTLK}			12	μA	$V_{IN} = 0\text{V}; V_{OUT} = 0\text{V}$	5.0.13
Protection functions³⁾							
Initial peak short circuit current limit	I_{LSCP}			2	A	$T_j = -40^\circ\text{C}; V_S = 20\text{V}; V_{IN} = 5.0\text{V}$	5.0.14
Initial peak short circuit current limit	I_{LSCP}		1.2		A	$T_j = 25^\circ\text{C}; V_S = 20\text{V}; V_{IN} = 5.0\text{V}$	5.0.15
Initial peak short circuit current limit	I_{LSCP}	0.4			A	$T_j = 125^\circ\text{C}; V_S = 20\text{V}; V_{IN} = 5.0\text{V}$	5.0.16

Electrical Characteristics

Table 4 $V_S = 13.5V$; $T_j = -40^\circ\text{C}$ to 125°C ; all voltages with respect to ground. Currents flowing into the device unless otherwise specified in chapter “Block Diagram and Terms”. Typical values at $V_S = 13.5V$, $T_j = 25^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition	Number
		Min.	Typ.	Max.			
Repetitive short circuit current limit $T_j = T_{j\text{Trip}}$; see timing diagrams	I_{LSCR}		1		A	$V_{IN} = 5.0V$	5.0.17
Output clamp at $V_{OUT} = V_S - V_{DSCL}$ (inductive load switch off)	V_{DSCL}	41	47		V	$I_S = 4\text{mA}$	5.0.18
Overvoltage protection $V_{OUT} = V_S - V_{ONCL}$	V_{SAZ}	41			V	$I_S = 4\text{mA}$	5.0.19
Thermal overload trip temperature	$T_{j\text{Trip}}$	150			°C		5.0.20
Thermal hysteresis	T_{HYS}		10		K		5.0.21
Reverse Battery⁴⁾							
Continuous reverse battery voltage	V_{SREV}	- 32			V		5.0.22
Forward voltage of the drain-source reverse diode	V_{FDS}		600		mV	$I_{FDS} = 200\text{mA}$; $V_{IN} = 0V$; $T_j = 125^\circ\text{C}$	5.0.23
Input interface; pin IN							
Input turn-ON threshold voltage	V_{INON}	2.2			V		5.0.24
Input turn-OFF threshold voltage	V_{INOFF}			0.8	V		5.0.25
Input threshold hysteresis	V_{INHYS}		0.3		V		5.0.26
Off state input current	I_{INOFF}	1		30	µA	$V_{IN} = 0.7V$	5.0.27
On state input current	I_{INON}	1		30	µA	$V_{IN} = 5.0V$	5.0.28
Input resistance	R_{IN}	1.5	3.5	5.0	kΩ		5.0.29
Status output (NMOS open drain); pin ST							
Status output zener voltage	V_{STZ}	5.4	6.1	6.8	V	$I_{ST} = 1.6\text{mA}$	5.0.30
Status output low voltage	V_{STLO}			0.4	V	$I_{ST} = 1.6\text{mA}$ $T_j < 25^\circ\text{C}$	5.0.31
Status output low voltage	V_{STLO}			0.6	V	$I_{ST} = 1.6\text{mA}$ $T_j < 125^\circ\text{C}$	5.0.32
Status leakage current	I_{STLK}			2	µA	$V_{ST} = 5V$ $T_j < 105^\circ\text{C}$	5.0.33
Status invalid time after positive input slope ⁵⁾	t_{dP}		300	600	µs	$V_S = 20V$	5.0.34
Diagnostic characteristics							
Short circuit detection voltage	V_{OUTSC}		2.8		V		5.0.35
Open load detection voltage ⁶⁾	V_{OUTOL}		3		V		5.0.36
Open load detection current ⁷⁾ (included in standby current)	I_{OUTOL}		5		µA	$V_{OUT} = 4V$	5.0.37

- 1) Device on 50mm x 50mm x 1.5mm epoxy FR4 PCB with 6cm² (one layer copper 70µm thick) copper area for supply voltage connection. PCB in vertical position without blown air.
- 2) Timing values only with high slewrate input signal; otherwise slower.
- 3) Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as “outside” normal operating range. Protection functions are not designed for continuous repetitive operation.


Electrical Characteristics

- 4) Requires a 150Ω resistor in GND connection. The reverse load current through the intrinsic drain-source diode of the power-MOS has to be limited by the connected load. Power dissipation is higher compared to normal operation due to the voltage drop across the drain-source diode. The temperature protection is not functional during reverse current operation! Input current has to be limited (see max ratings).
- 5) No delay time after overtemperature switch off and short circuit in on-state.
- 6) External pull up resistor required for open load detection in off state.
- 7) External pull up resistor required for open load detection in off state.


6 Typical Performance Graphs

Typical Performance Characteristics


Transient Thermal Impedance Z_{thJA} versus
Pulse Time t_p @ 6cm² heatsink area

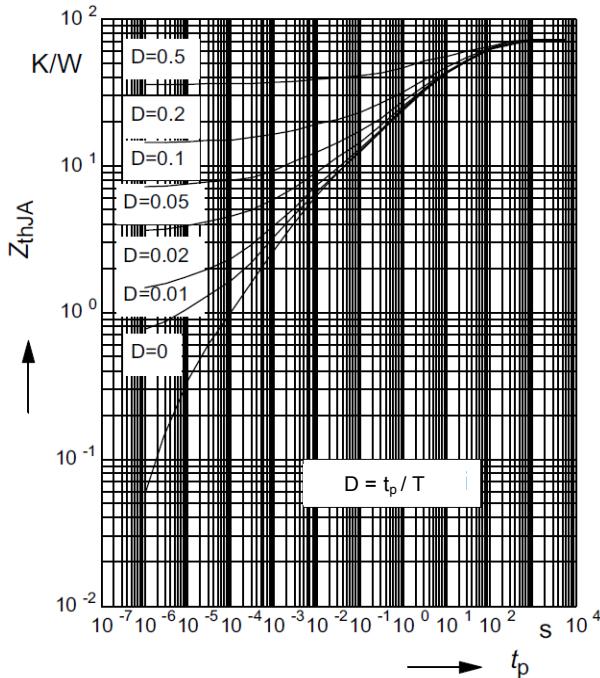


On-Resistance $R_{DS(ON)}$ versus
Junction Temperature T_j

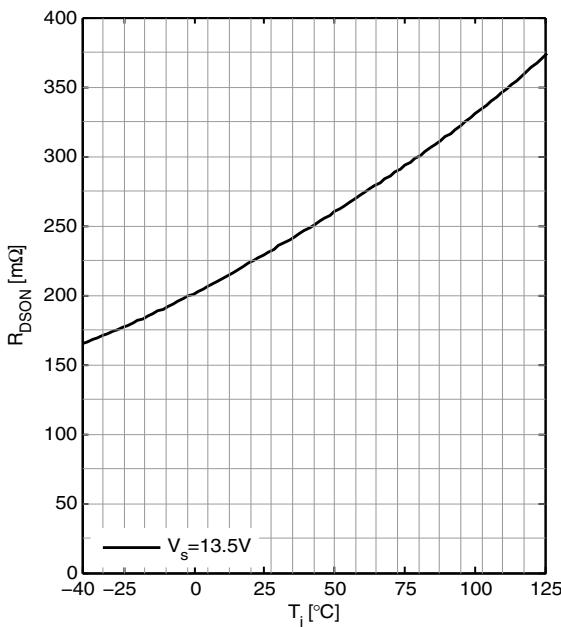

Transient Thermal Impedance Z_{thJA} versus
Pulse Time t_p @ min footprint




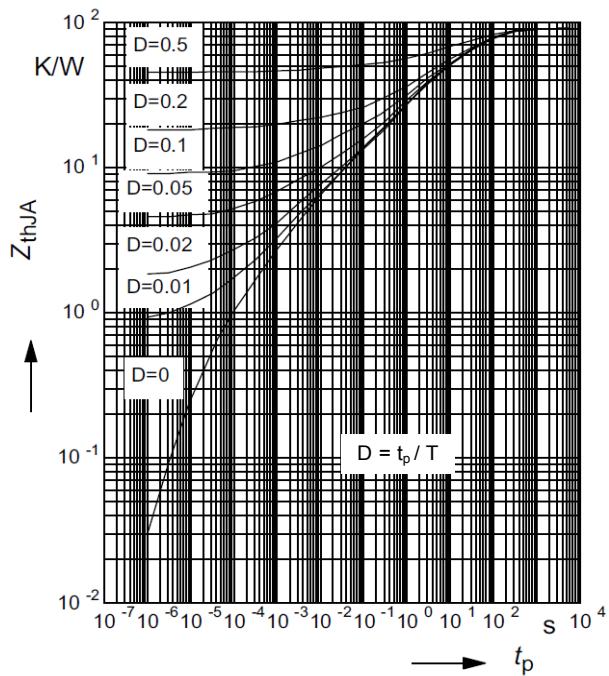


On-Resistance $R_{DS(ON)}$ versus
Supply Voltage V_s

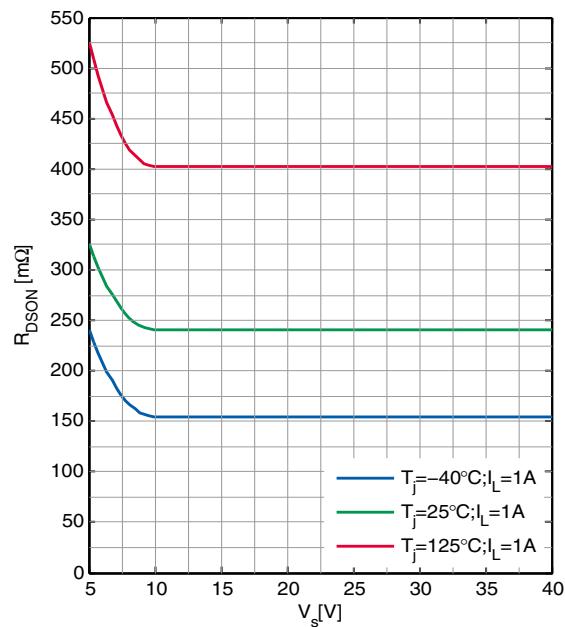





Typical Performance Graphs

Typical Performance Characteristics

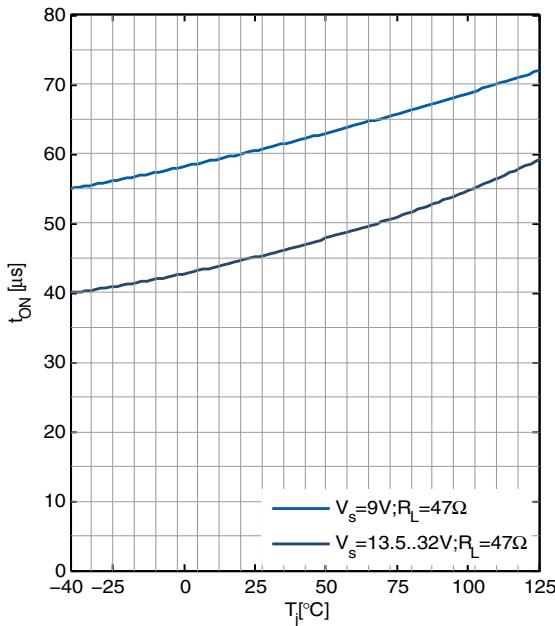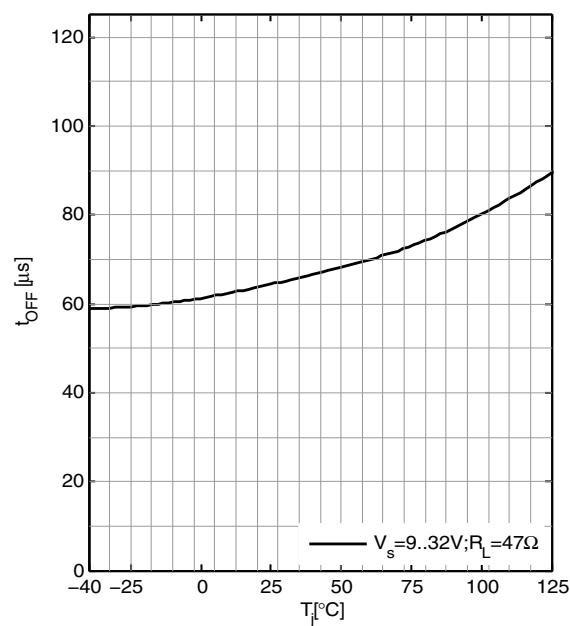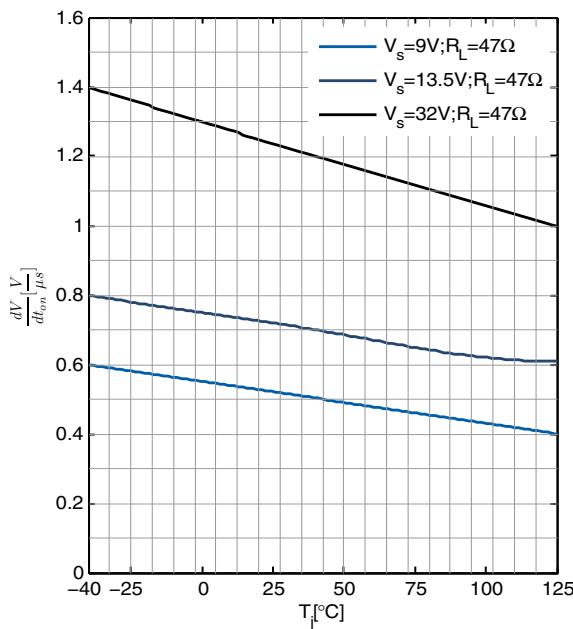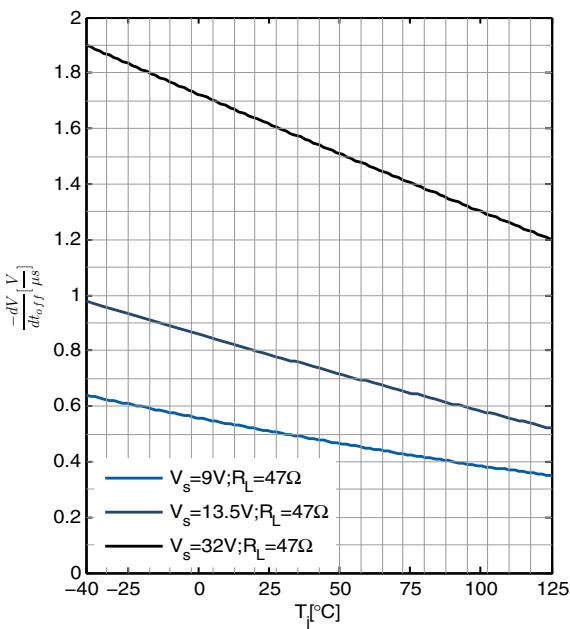 Switch ON Time t_{ON} versus
 Junction Temperature T_j

 Switch OFF Time t_{OFF} versus
 Junction Temperature T_j

 ON Slewrate SR_{ON} versus
 Junction Temperature T_j

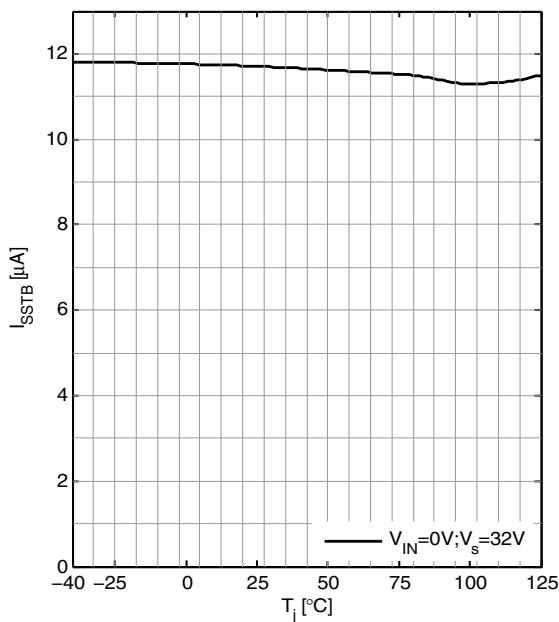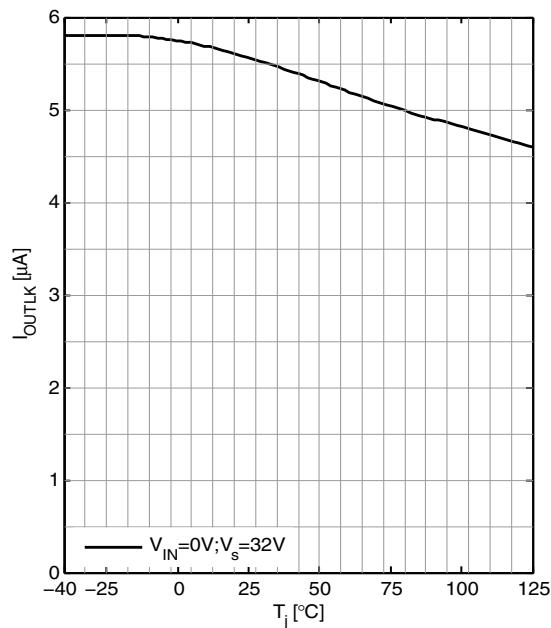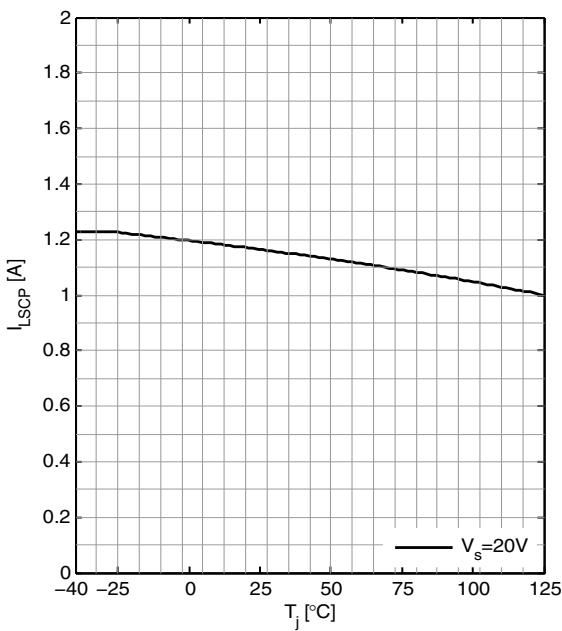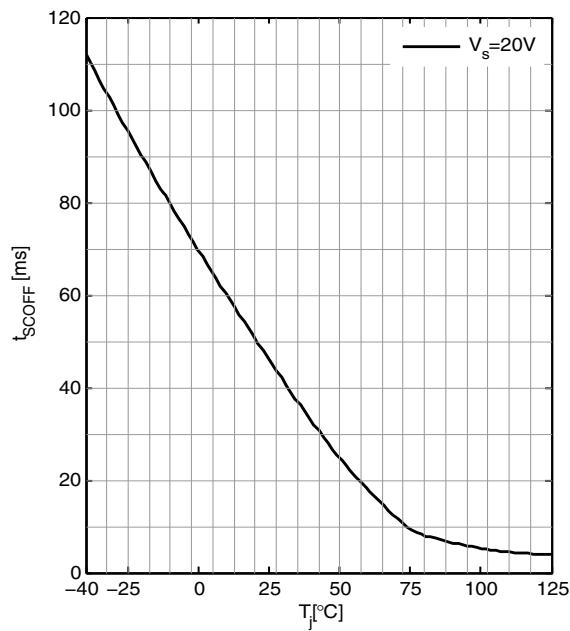 OFF Slewrate SR_{OFF} versus
 Junction Temperature T_j


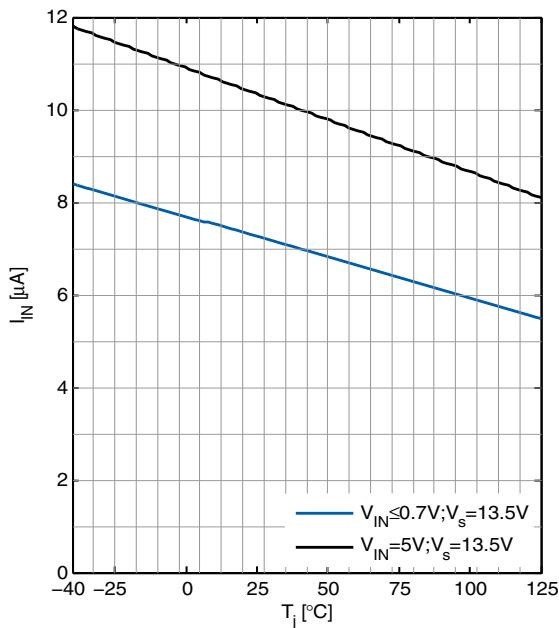
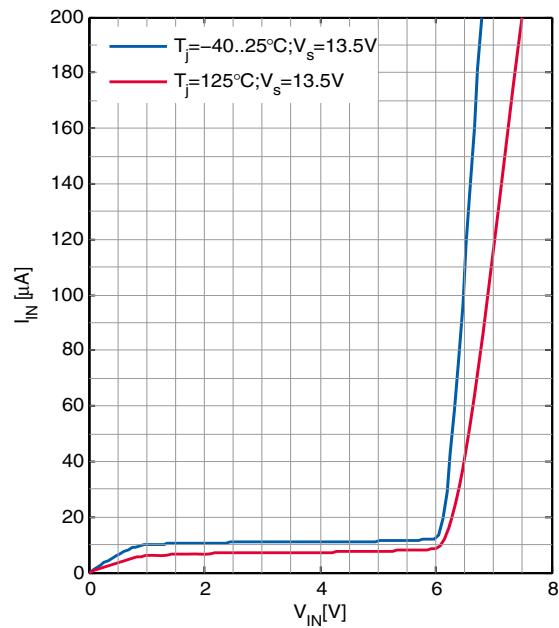
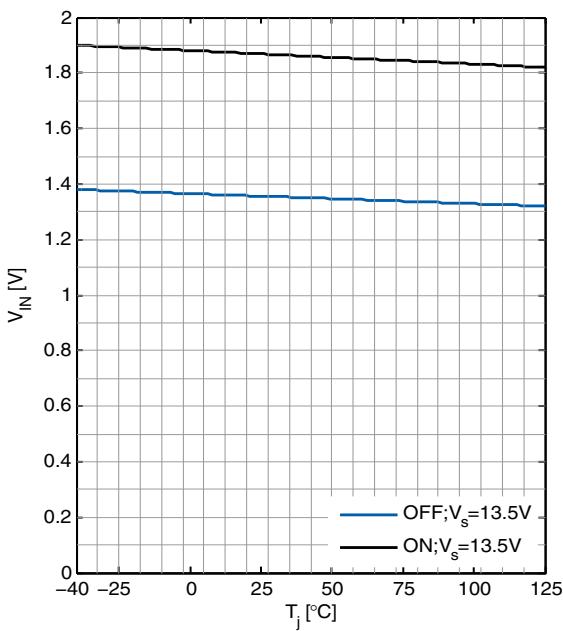
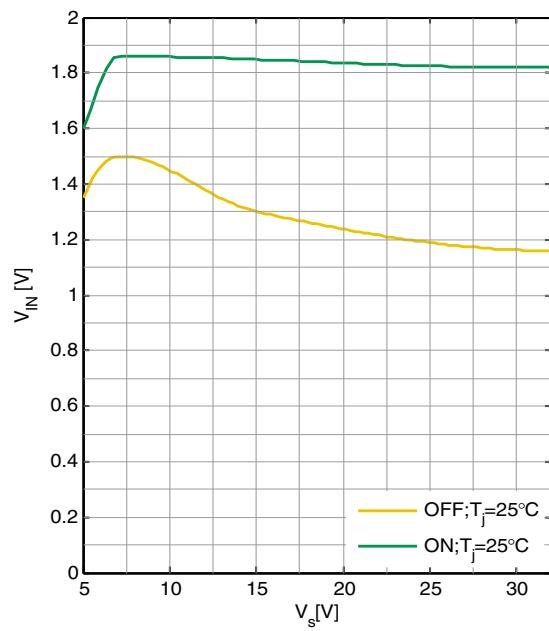
Typical Performance Graphs

Typical Performance Characteristics

 Standby Current I_{SSTB} versus
Junction Temperature T_j

 Output Leakage current I_{OUTLK} versus
Junction Temperature T_j

 Initial Peak Short Circuit Current Limit I_{LSCP} versus
Junction Temperature T_j

 Initial Short Circuit Shutdown time t_{SCOFF} versus
Junction Temperature T_j


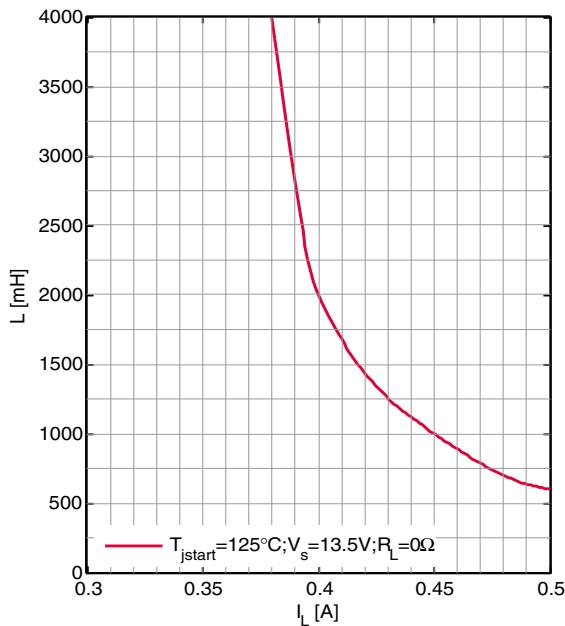
Typical Performance Graphs

Typical Performance Characteristics


 Input Current Consumption I_{IN} versus
Junction Temperature T_j

 Input Current Consumption I_{IN} versus
Input voltage V_{IN}

 Input Threshold voltage $V_{INH,L}$ versus
Junction Temperature T_j

 Input Threshold voltage $V_{INH,L}$ versus
Supply Voltage V_s


Typical Performance Graphs

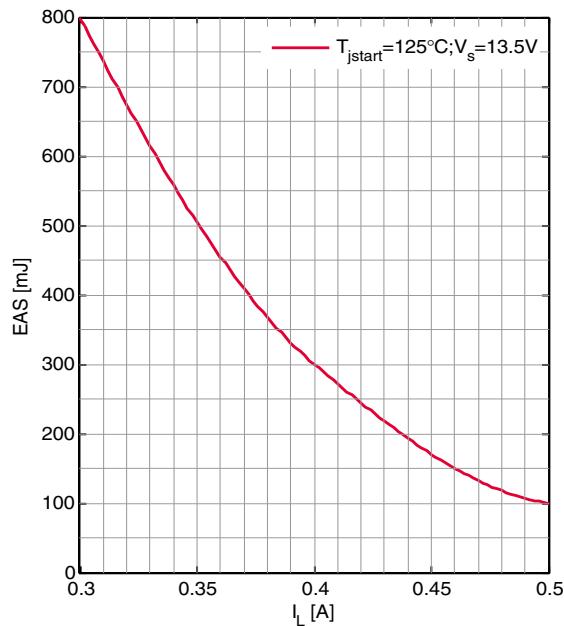
Max. allowable Load Inductance L versus Load current I_L



Max. allowable Inductive single pulse Switch-off Energy E_{AS} versus Load current I_L



Status Delay Time t_{dP} versus Supply Voltage V_s

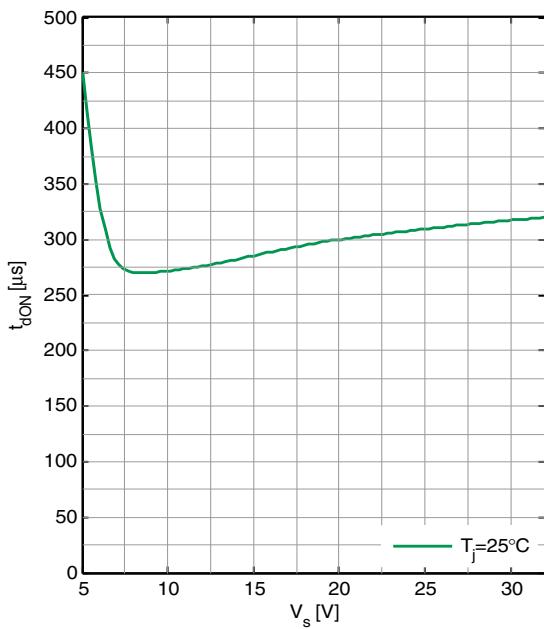

7 Application Information

7.1 Application Diagram

The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty for a certain functionality, condition or quality of the device.

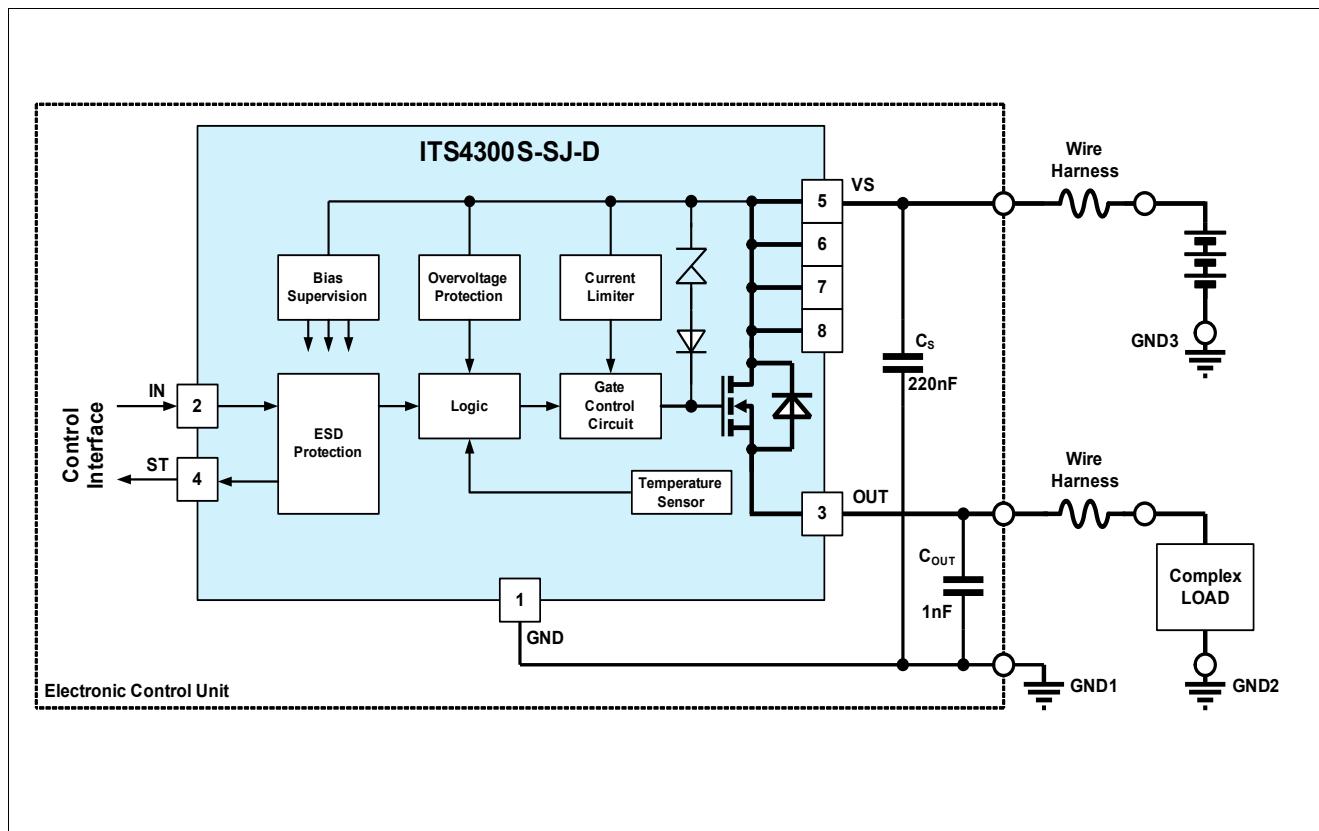


Figure 4 Application Diagram

The ITS4300S-SJ-D can be connected directly to a supply network. It is recommended to place a ceramic capacitor (e.g. $C_S = 220\text{nF}$) between supply and GND to avoid line disturbances. Wire harness inductors/resistors are sketched in the application circuit above.

The complex load (resistive, capacitive or inductive) must be connected to the output pin OUT.

A built-in current limit protects the device against destruction.

The ITS4300S-SJ-D can be switched on and off with standard logic ground related logic signal at pin IN.

In standby mode (IN=L) the ITS4300S-SJ-D is deactivated with very low current consumption.

The output voltage slope is controlled during on and off transition to minimize emissions. Only a small ceramic capacitor $C_{OUT}=1\text{nF}$ is recommended to attenuate RF noise.

In the following chapters the main features, some typical waveforms and the protection behaviour of the ITS4300S-SJ-D is shown. For further details please refer to application notes on the Infineon homepage.

7.2 Diagnosis Description

For diagnostic purpose the device provides a digital output pin ST in order to indicate fault conditions.

The status output (ST) of the ITS4300S-SJ-D is a high voltage open drain output.

In "normal" operation mode the NMOS open drain transistor is switched OFF.


The following truth table defines the status output.

Table 5 Truth Table of diagnosis feature

Device Operation	IN	OUT	ST	Comment
Normal Operation	H	H	H	
Short circuit to GND	L	L	H	No diagnosis
Short circuit to GND	H	L	L	OUT=L: $V_{OUT} < V_{OUTSC}$; Short circuit detection voltage; typ 2.8V
Short Circuit to V_S (in OFF state)	L	H	L	
Short Circuit to V_S (in ON state)	H	H	H	No diagnosis
Overload	L	L	H	No diagnosis
Overload	H	H	H	OUT=H: $V_{OUT} > V_{OUTSC}$; Short circuit detection voltage; typ 2.8V
Overtemperature	L	L	H	No diagnosis
Overtemperature	H	L	L	
Open Load in OFF state	L	H	L	
Open Load in OFF state	H	H	H	No diagnosis

7.3 Special Feature Description

Supply over voltage:

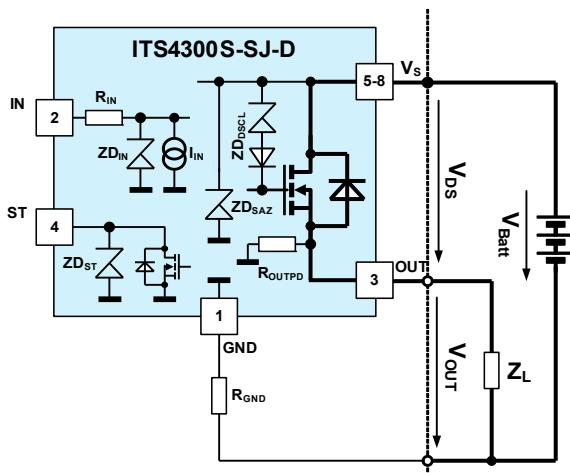

If over-voltage is applied to the V_S-Pin:


Voltage is limited to V_{ZDSA2}; current can be calculated:

$$I_{ZDSA2} = (V_S - V_{ZDSA2}) / R_{GND}$$

A typical value for R_{GND} is 150Ω.

In case of ESD pulse on the input pin there is in both polarities a peak current $I_{INpeak} \sim V_{ESD} / R_{IN}$

Supply reverse voltage:

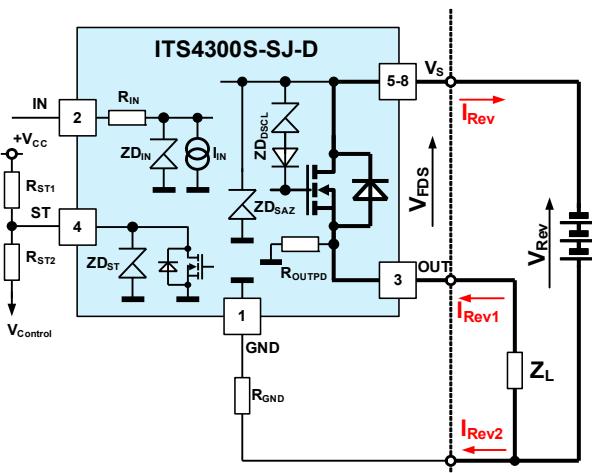

If reverse voltage is applied to the device:

1.) Current via load resistance R_L:

$$I_{Rev1} = (V_{Rev} - V_{FDS}) / R_L$$


2.) Current via Input pin IN and diagnostic pin ST:

$$I_{Rev2} = I_{ST} + I_{IN} \sim (V_{Rev} - V_{CC}) / R_{IN} + (V_{Rev} - V_{CC}) / R_{ST1,2}$$

Current I_{ST} must be limited with the external series resistor R_{STS}. Both currents will sum up to:

$$I_{Rev} = I_{Rev1} + I_{Rev2}$$

Drain-Source power stage clamp V_{DSCL}:

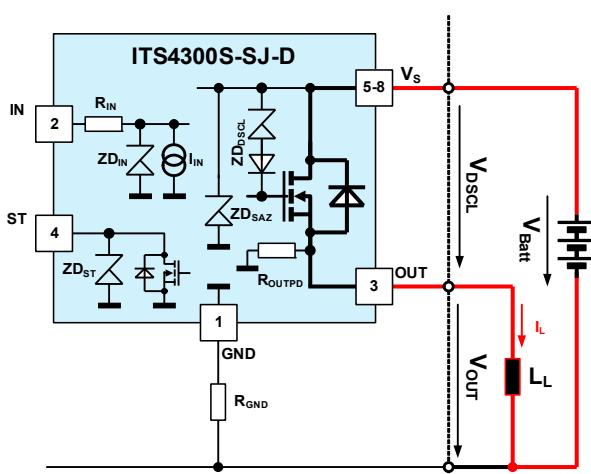


When an inductive load is switched off a current path must be established until the current is sloped down to zero (all energy removed from the inductive load). For that purpose the series combination Z_{DSCL} is connected between Gate and Drain of the power DMOS acting as an active clamp.

When the device is switched off, the voltage at OUT turns negative until V_{DSCL} is reached.

The voltage on the inductive load is the difference between V_{DSCL} and V_S.

Energy calculation:

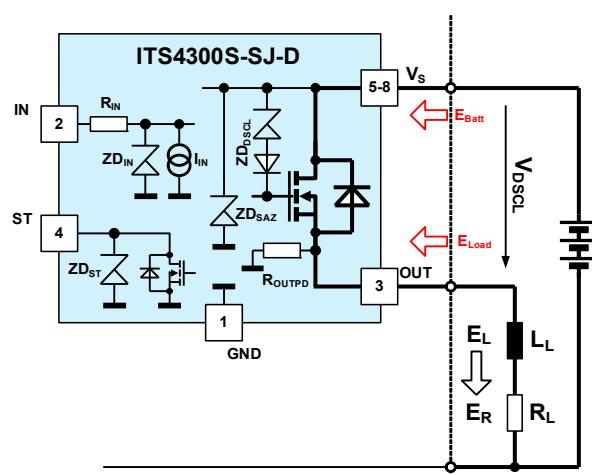

Energy stored in the load inductance is given by:

$$E_L = I_L^2 * L / 2$$

While demagnetizing the load inductance the energy dissipated by the Power-DMOS is:

$$E_{AS} = E_S + E_L - E_R$$


With an approximate solution for R_L = 0Ω:

$$E_{AS} = 1/2 * L * I_L^2 * \{(1 - V_S / (V_S - V_{DSCL}))\}$$


Figure 5 Special feature description

7.4 Typical Application Waveforms


General Input Output waveforms:

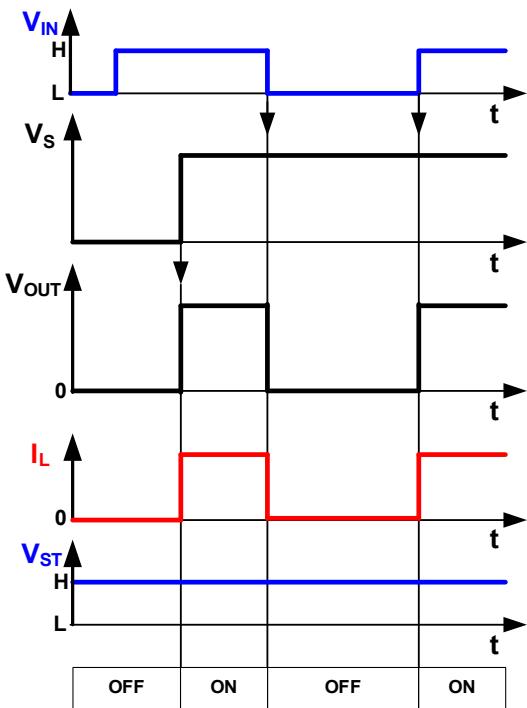

Waveforms switching a resistive load:

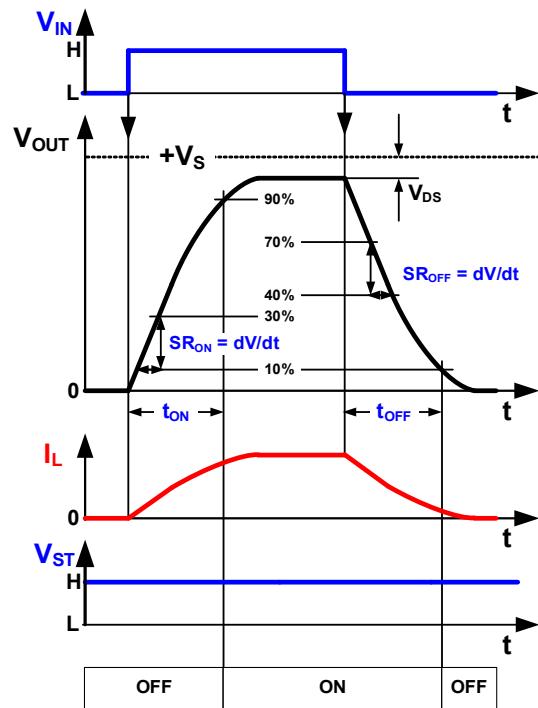

Waveforms switching a capacitive load:

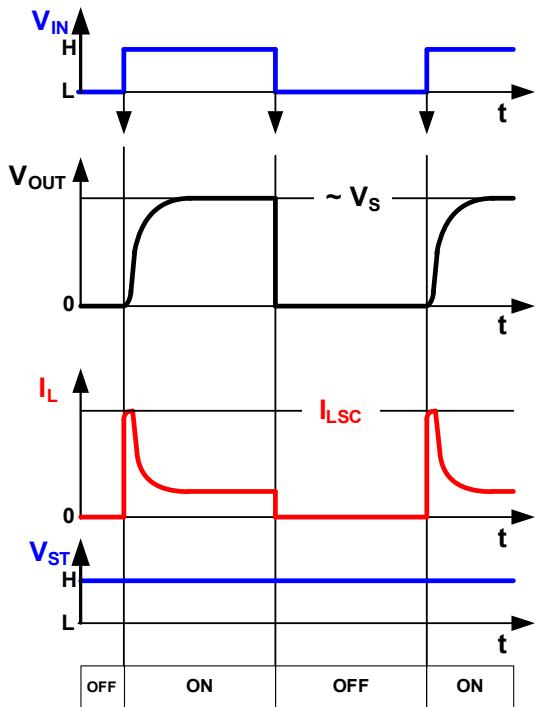

Waveforms switching an inductive load:


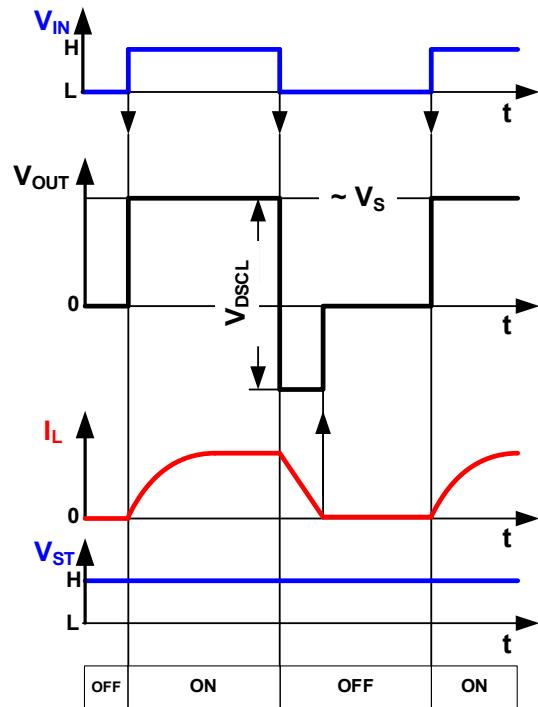



Figure 6 Typical application waveforms of the ITS4300S-SJ-D

7.5 Protection Behavior


Overtemperature concept:

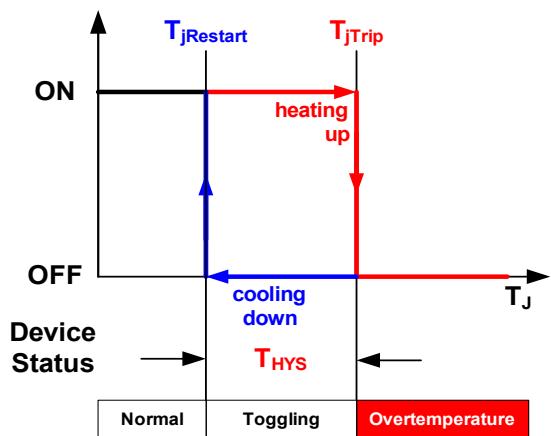

Overtemperature behavior:

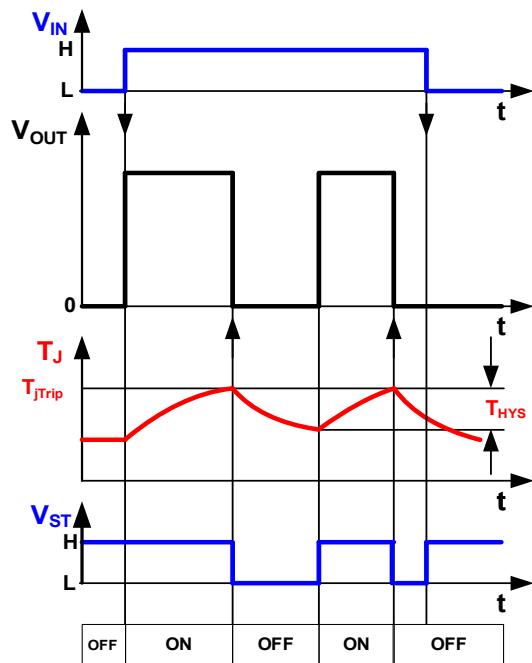

Waveforms turn on into a short circuit :

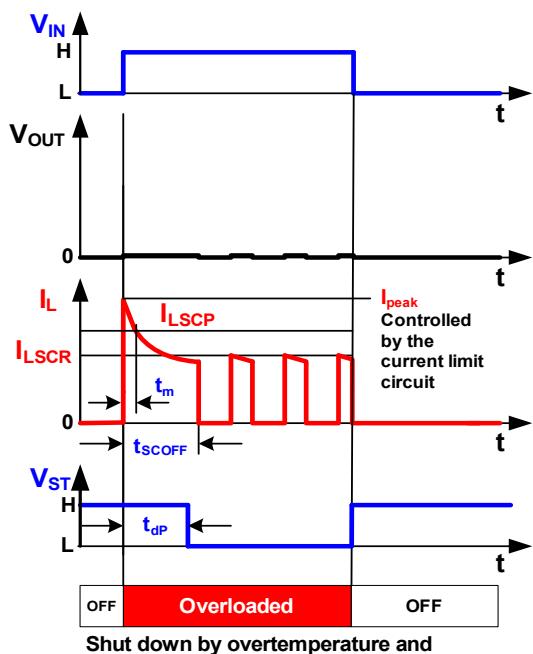

Waveforms short circuit during on state :

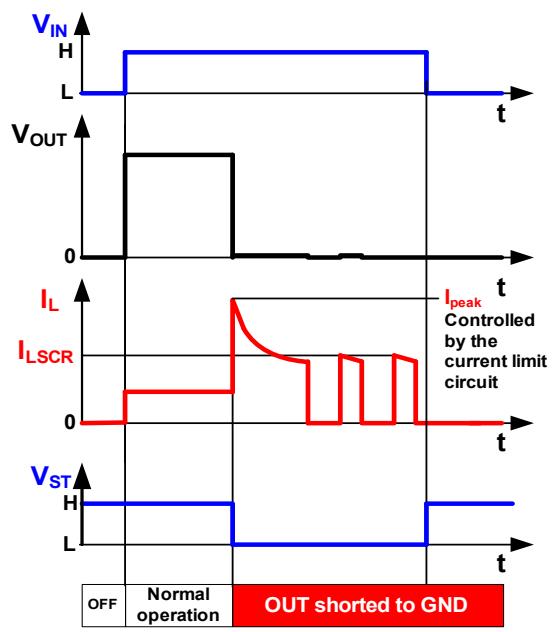


Figure 7 Protective behaviour of the ITS4300S-SJ-D

8 Package outlines and footprint

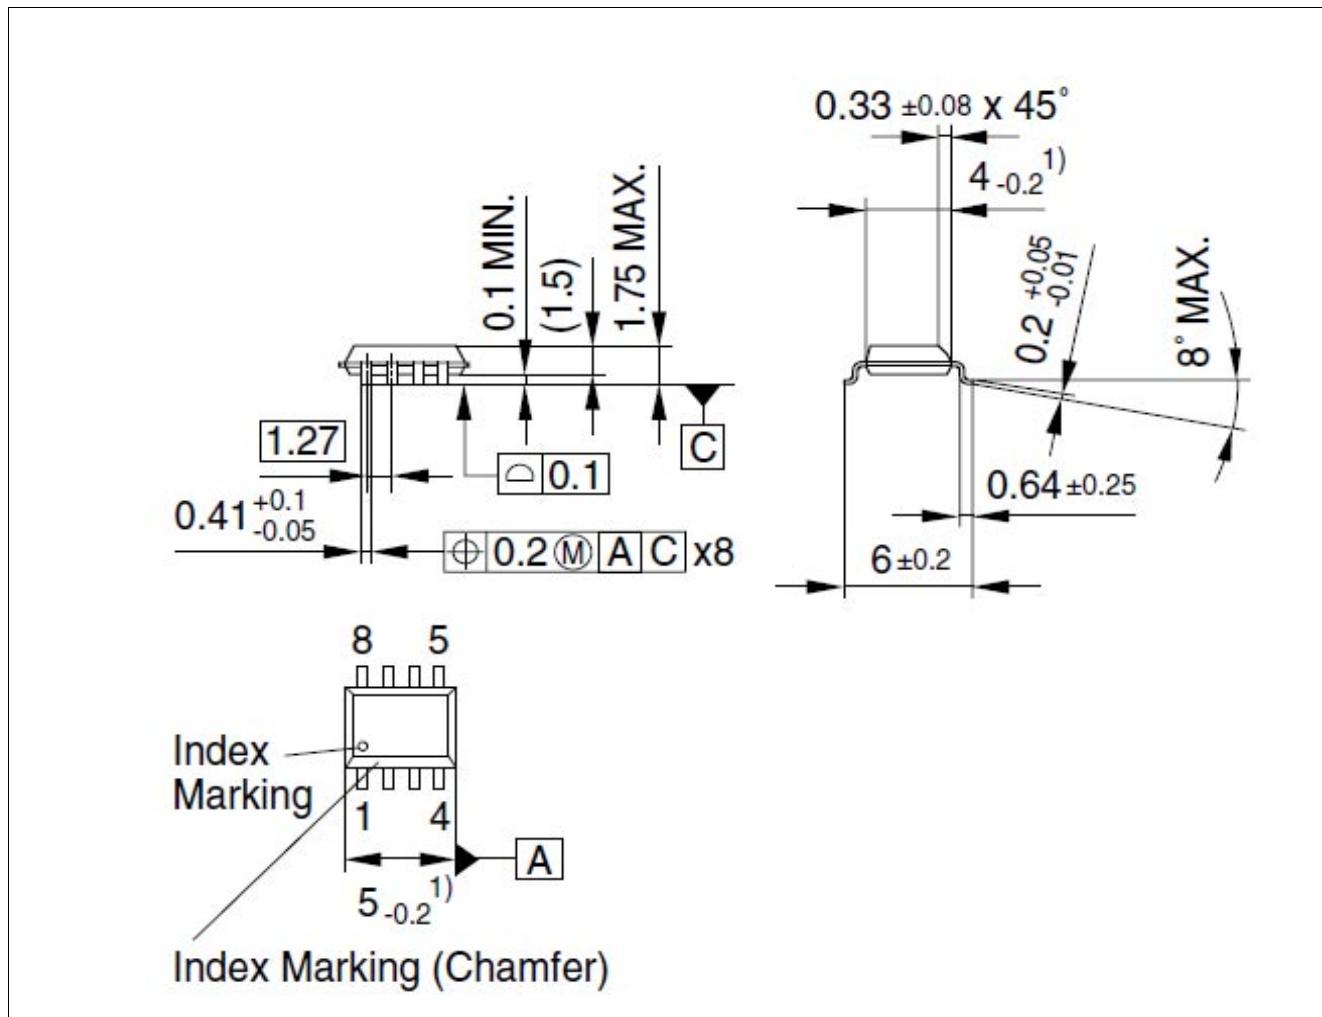


Figure 8 PG-DSO-8 (Plastic Dual Small Outline Package, RoHS-Compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020

9 Revision History

Revision	Date	Changes
V 1.0	12-09-01	Datasheet release

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™; PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, µVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

Edition 2012-09-01

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2012 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.