


# Miniature 12 & 20 Amp General Purpose Relay

PC834

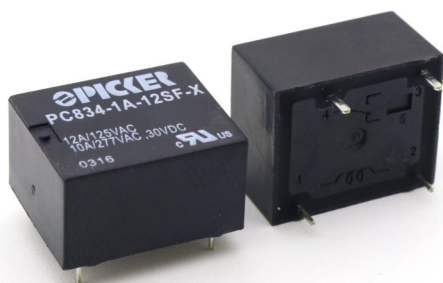

## FEATURES

- 12 Amp Continuous Contact Capacity
- 1 Form A Contact Form
- Smallest 12 Amp Relay
- Class "B" Insulation Standard
- Class "F" Insulation Available
- 2.5 kV Dielectric Between Coil and Contacts
- Lead Free and RoHS Compliant

## UL / CUL Ratings

c  us E86876

Load Type	Voltage	1 Form A
General Purpose	277 VAC	10 A
	125 VAC	12 A
	30 VDC	10 A
Resistive	277 VAC	10 A
	125 VAC	12 A
	30 VDC	10 A
TV-5	125 VDC	5 A

## CROSS REFERENCES

Song Chuan 834
834-1A-F-V-12VDC Crosses to PC834-1A-12SF-X

## CONTACT DATA

Material		AgCdO (Silver Cadmium Oxide)
Initial Contact Resistance		50 milliohms max @ 0.1 A, 6 VDC
Service Life	Mechanical	1 X 10 <sup>7</sup> Operations
	Electrical	1 X 10 <sup>5</sup> Operations
Max. Switching Current		12 Amps
Max. Switching Power		300 W, 2.77 VA
Max. Switching Voltage		30 VDC, 300 VAC

## CHARACTERISTICS

Operate Time	25 ms Max
Release Time	25 ms Max
Insulation Resistance	100 MΩ min (at 500 VDC)
Dielectric Strength	1,000 V5 Between Contacts 2,500 V 50 Hz Between Contact and Coil
Vibration Resistance	10 Hz - 55 Hz DA 1.5 mm
Power Consumption	1 & 2 Pole DC 0.9 W, AC 1.2 VA

## CHARACTERISTICS CONT.

Terminal Strength	5N
Solderability	260°C for 5 seconds
Storage Temperature	-40°C to 125°C Class B, -40°C to 155°C Class F
Operating Temperature	-40°C to 70°C Class B, -40°C to 105°C Class F
Relative Humidity	85% (at 30°C)
Weight	7 grams

## ORDERING INFORMATION

Example:	PC834	-1A	-12	S	F	-X
Model:	PC834					
Contact Form:	1A					
Coil Voltage:	3, 5, 6, 9, 12, 18, 24					
Enclosure:	S: Epoxy Sealed Non-Washable; C: Flux Free					
Insulation System:	Nil: Class B (70°C), F: Class F (105°C)					
RoHS Compliant:	-X					

Box Quantity: 2,000; Inner Box: 1,000

## COIL DATA




Coil Voltage	Resistance Ohms $\pm 10\%$	Must Operate Voltage Max. (VDC)	Must Release Voltage Max. (VDC)	Continuous Voltage Max. (VDC)
3	20	2.25	0.15	3.9
5	56	3.75	0.25	6.5
6	80	4.5	0.30	7.8
9	180	6.75	0.45	11.7
12	320	9.0	0.60	15.6
18	720	13.5	0.90	23.4
24	1280	18.0	1.20	31.2

## NOTES:


The use of any coil voltage less than the rated voltage will compromise the operation of the relays. Must Operate Voltage is listed for test purposes only and is not to be used as design criteria. Pickup and release voltages are for test purposes only and are not to be used as design criteria. Dimensions are in mm, Inches are listed for reference only.

## DIMENSIONS

mm / in

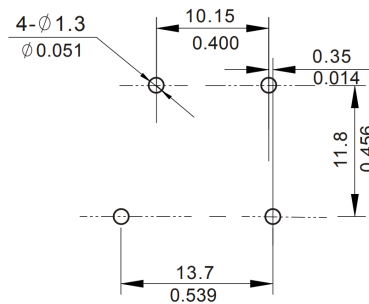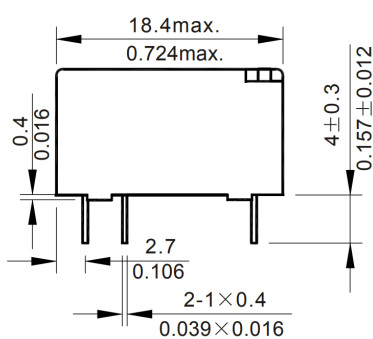

Mounting



Wiring Diagram

## REFERENCE DATA

