

RPE2C1H180J2M1Z01A

Discontinued

General

RoHS

REACH

125
°C max.

Low
acoustic
noise


Deflecting
crack

Soldering
crack

FlowOK

Welding

Appearance & Shape

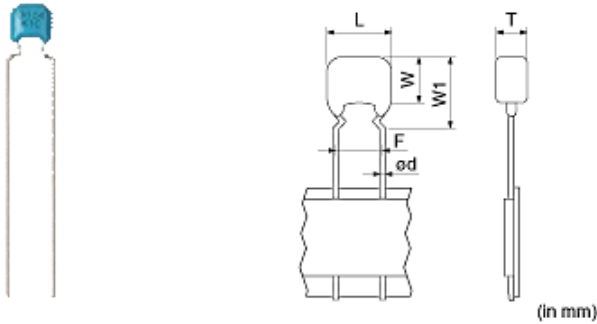

Notices

In case of automotive use, alternative part is RCE series.

References

Packaging	Specifications	Minimum Order Quantity
A	Ammo Pack	2000

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

RPE2C1H180J2M1Z01A

Specifications

L size or Outer diameter D	5.0mm max.
Width	3.5mm max.
T size	2.5mm max.
Lead spacing F	5.0+0.6/-0.2mm
Lead diameter d	0.5±0.05mm
Capacitance	18pF ±5%
Rated voltage	50Vdc
Temperature characteristics	CH(JIS)
Temperature range of temperature characteristics	20°C to 125°C
Operating Temperature Range	-55°C to 125°C
TC	0±60ppm/°C
W1 size	5.0mm

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

RPE2C1H180J2M1Z01A



Product Data

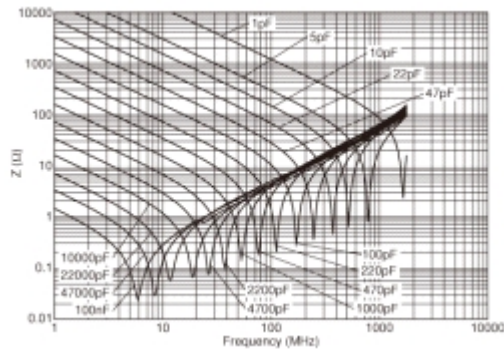

Impedance - frequency characteristics

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.