DIMENSIONS:	
A	3.125" ±0.063
B	4.186" ±0.125
C	3.795" ±0.063
D	2.500" ±0.063
E	2.938" ±0.063
G	0.203" x 0.400" ±0.015

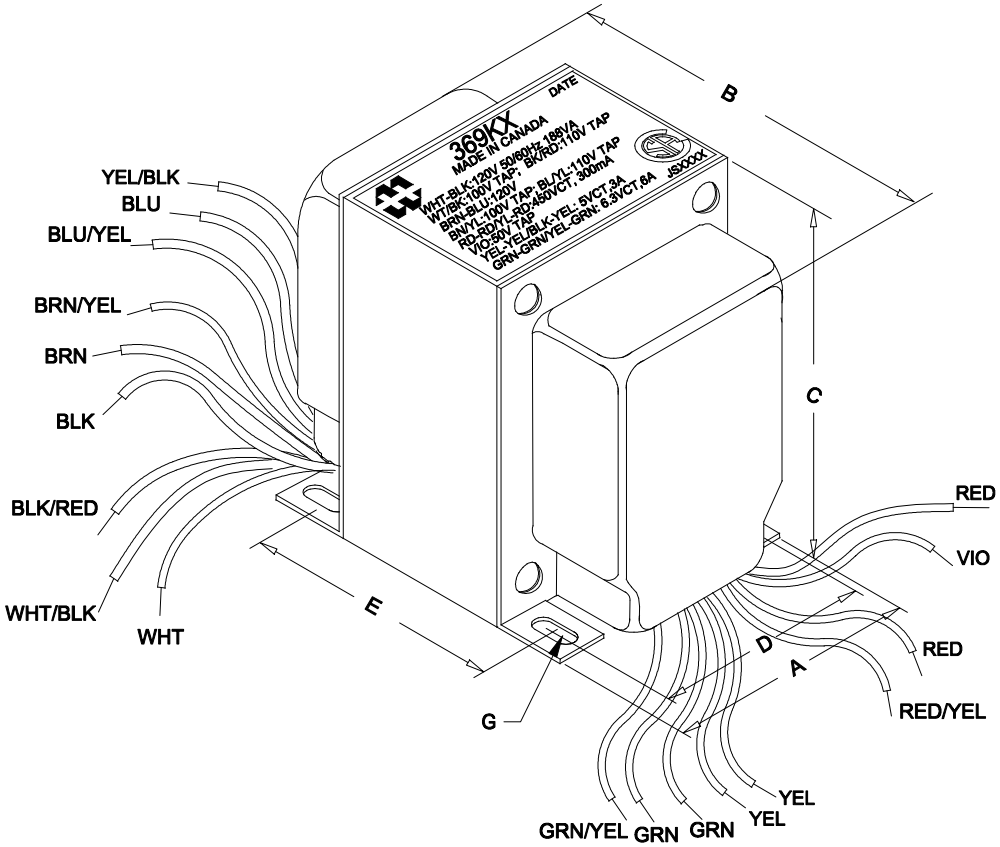

NOTE:ALL LEADS 8" OUT MIN.

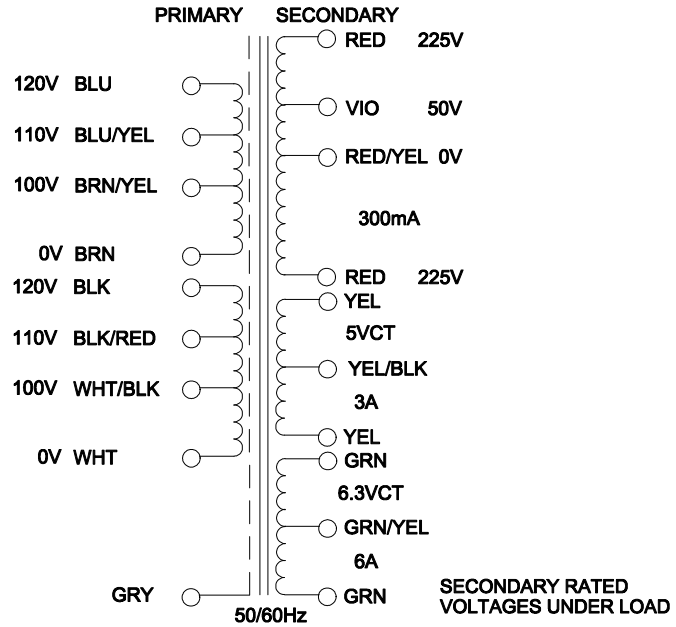

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 120V, 60Hz, WHT - BLK	221mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	474.2V	±2%
	RED - RED/YEL = RED/YEL - RED =	237.1V	±2%
	RED/YEL - VIO =	52.80V	±2%
	YEL - YEL =	5.280V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.640V	±2%
	GRN - GRN =	6.720V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.360V	±2%
DCR	@ 20°C, WHT - BLK =	3.075 Ω	±20%
	@ 20°C, BRN - BLU =	3.328 Ω	±20%
	@ 20°C, RED - RED =	36.87 Ω	±20%
	@ 20°C, YEL - YEL =	0.043 Ω	±20%
	@ 20°C, GRN - GRN =	0.029 Ω	±20%
HIPOT	PRMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED.	01/18/10

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 369KX
DATE: 01/18/10	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hammond:
369KX