


Darlington Transistors

BDW93, BDW94 Series



Features:

- Designed for general-purpose amplifier and low speed switching applications
- Collector-emitter sustaining voltage- $V_{CEO(sus)} = 80\text{ V}$ (Minimum) - BDW93B, BDW94B
100 V (Minimum) - BDW93C, BDW94C
- Collector-emitter saturation voltage- $V_{CE(sat)} = 2\text{ V}$ (Maximum) at $I_C = 5\text{ A}$
- Monolithic construction with built-in-base-emitter shunt resistor




Pin : 1. Base
2. Collector
3. Emitter
4. Collector (Case)

Dimension	Minimum	Maximum
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.9

NPN
BDW93B
BDW93C

PNP
BDW94B
BDW94C

12 A
Darlington
Complementary Silicon
Power Transistors
45 to 100 V
80 W



TO-220

Dimensions : Millimetres

Maximum Ratings

Characteristic	Symbol	BDW93B BDW94B	BDW93C BDW94C	Unit
Collector-Emitter Voltage	V _{CEO}	80	100	V
Collector-Base Voltage	V _{CBO}			
Emitter-Base Voltage	V _{EBO}	5		
Collector Current-Continuous Peak	I _C I _{CM}	12 15		A
Base Current	I _B	0.2		
Total Power Dissipation at T _C = 25°C Derate Above 25°C	P _D	80 0.64		W W / °C
Operating and Storage Junction Temperature Range	T _J , T _{STG}	-65 to +150		°C

Thermal Characteristics


Characteristic	Symbol	Maximum	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.56	$^\circ\text{C} / \text{W}$

Darlington Transistors

BDW93, BDW94 Series



Figure1 Power Derating

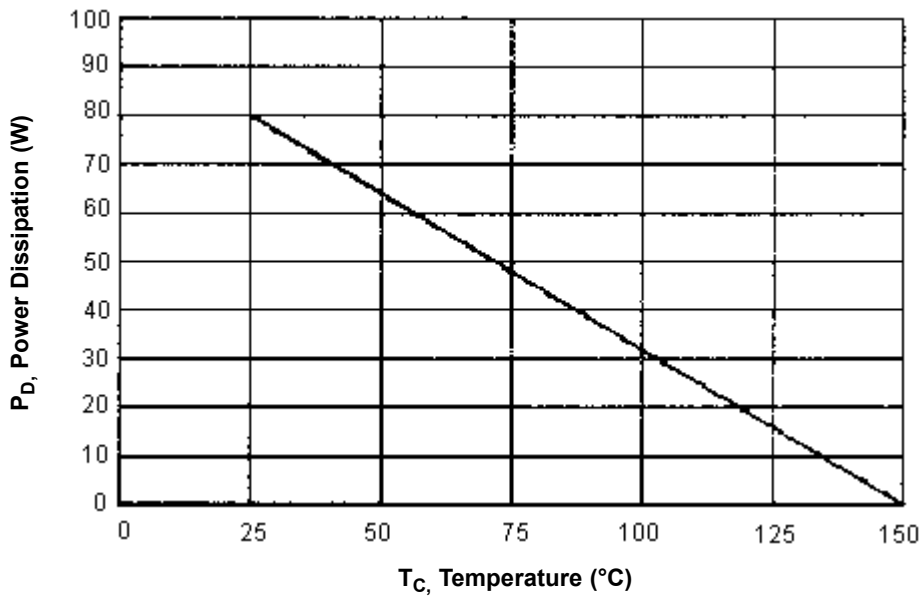

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Minimum	Maximum	Unit
OFF Characteristics				
Collector-Emitter Sustaining Voltage (1) ($I_C = 100\text{ mA}$, $I_B = 0$)	$V_{CEO(sus)}$	80 100	-	V
Collector Cut off Current ($V_{CE} = 80\text{ V}$, $I_B = 0$)	I_{CEO}	-	1	mA
Collector-Base Cut off Current ($V_{CB} = \text{Rated } V_{CB}$, $I_E = 0$)	I_{CBO}	-	100	μA
Emitter-Base Cut off Current ($V_{EB} = 5\text{ V}$, $I_C = 0$)	I_{EBO}	-	2	mA
ON Characteristics (1)				
DC Current Gain ($I_C = 3\text{ A}$, $V_{CE} = 3\text{ V}$) ($I_C = 5\text{ A}$, $V_{CE} = 3\text{ V}$) ($I_C = 10\text{ A}$, $V_{CE} = 3\text{ V}$)	h_{FE}	1,000 750 100	20,000	-
Collector-Emitter Saturation Voltage ($I_C = 5\text{ A}$, $I_B = 20\text{ mA}$) ($I_C = 10\text{ A}$, $I_B = 100\text{ mA}$)	$V_{CE(sat)}$	-	2 3	V
Base-Emitter Saturation Voltage V ($I_C = 5\text{ A}$, $I_B = 20\text{ mA}$) ($I_C = 10\text{ A}$, $I_B = 100\text{ mA}$)	$V_{BE(sat)}$	-	2.5 4	


(1) Pulse Test : Pulse Width = 300 μs , Duty Cycle = 2%

Darlington Transistors


BDW93, BDW94 Series



BDW93 Series NPN

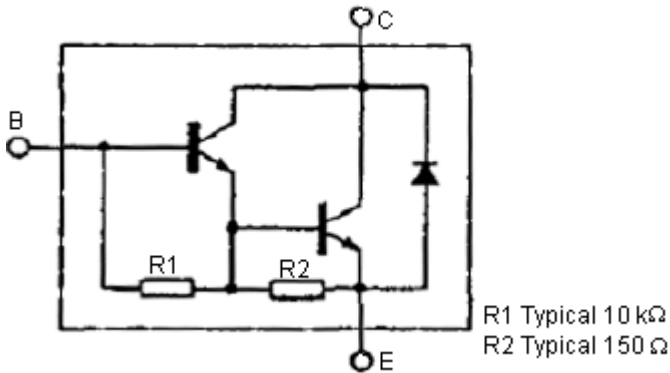


BDW94 Series PNP

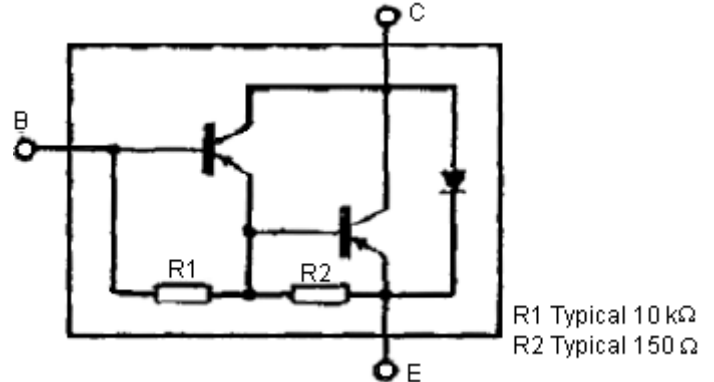


NPN BDW93B and C

$I_C - V_{be}$

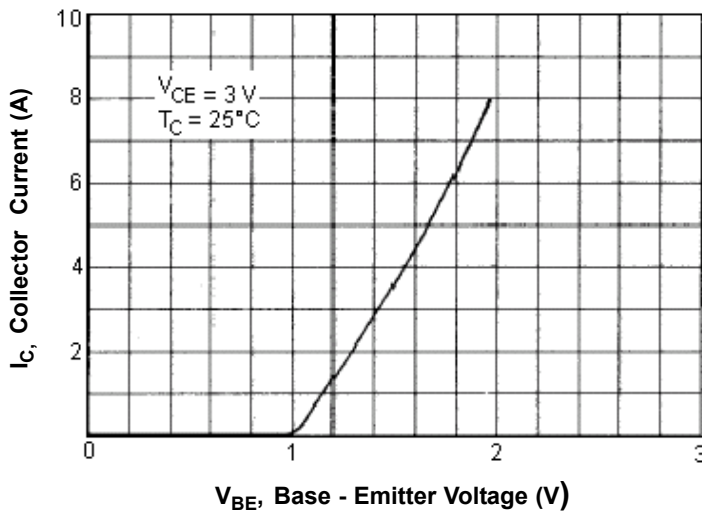


NPN BDW94B and C


$I_C - V_{be}$

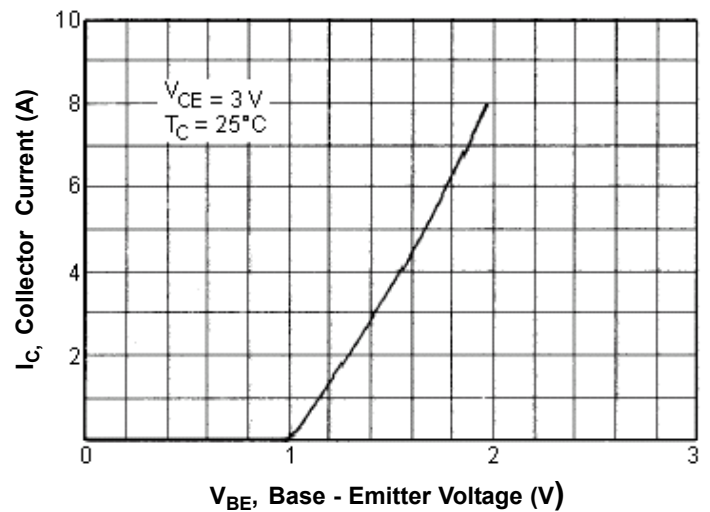

Switching Time

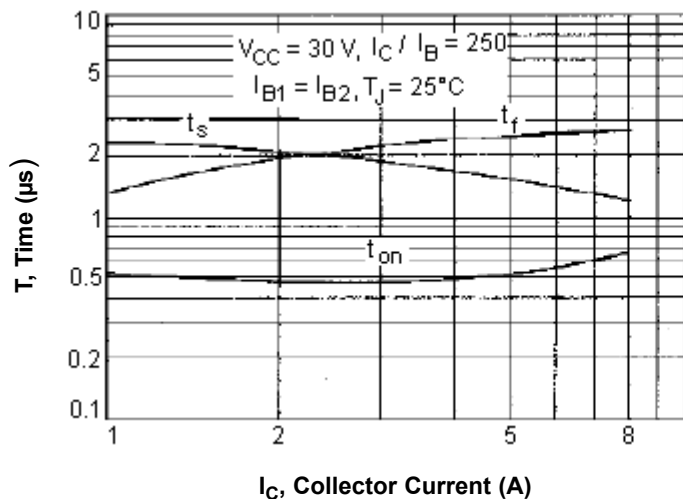

Switching Time

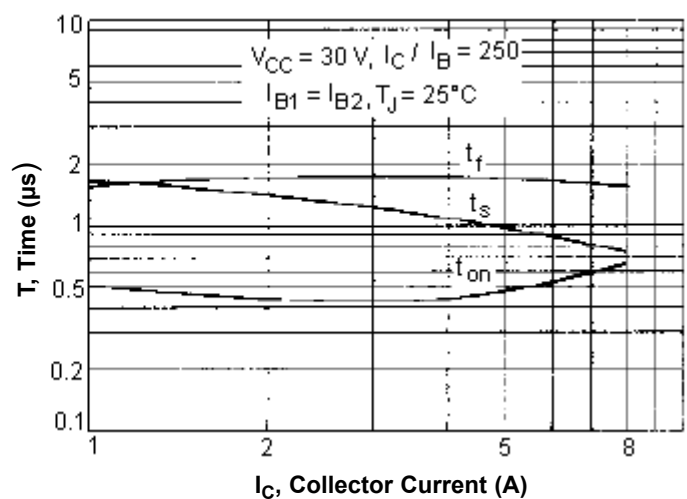


Darlington Transistors

BDW93, BDW94 Series




NPN BDW93B and C/PNP BDW94B and C

Active-Region Safe Operating Area (SOA)

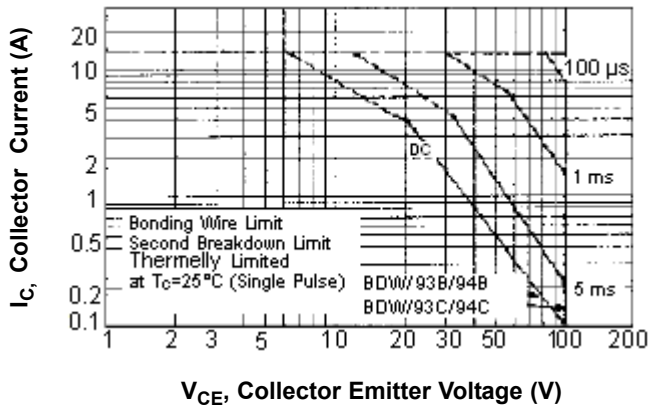


NPN BDW93B and C

DC Current Gain

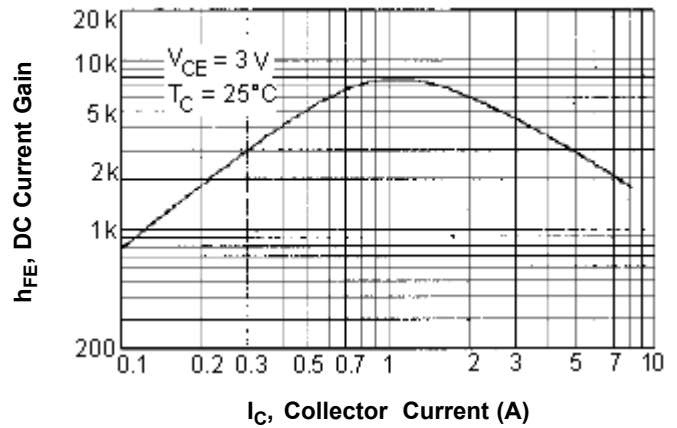


PNP BDW94B and C

DC Current Gain

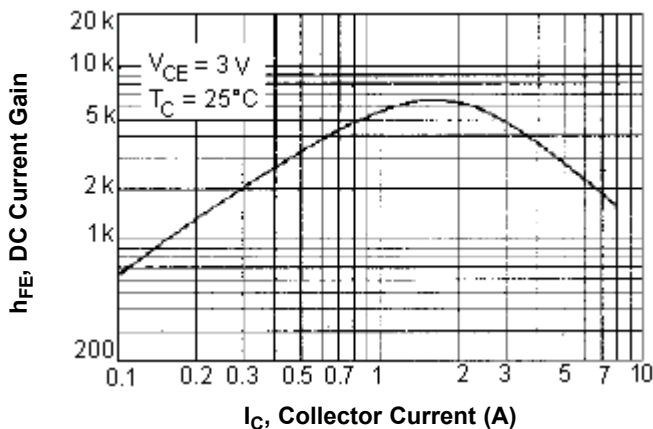


NPN BDW93B and C

Collector Saturation Region

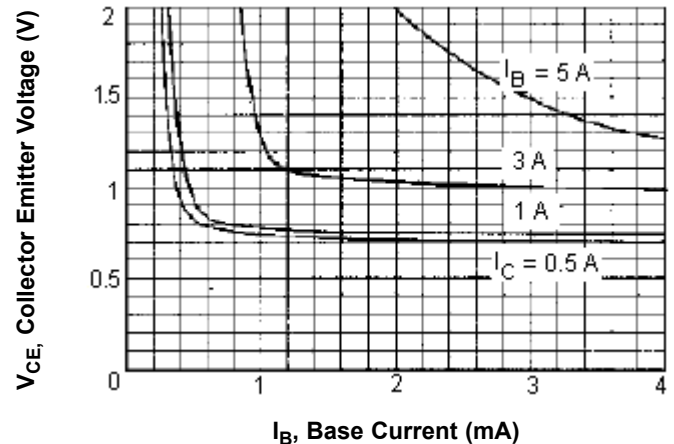


PNP BDW94B and C

Collector Saturation Region

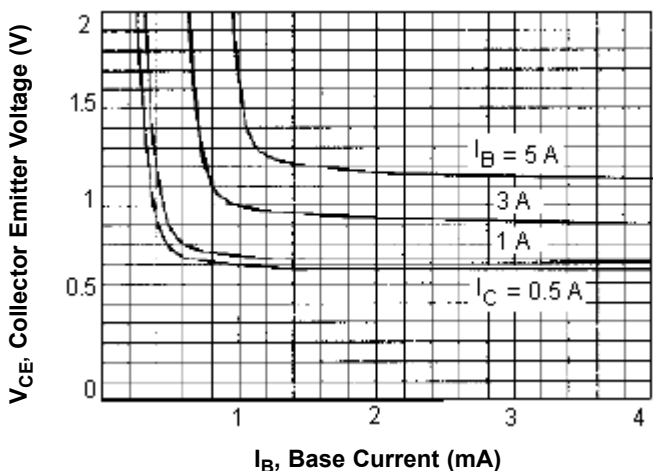

NPN BDW93B and C

$V_{CE(Sat)} - I_C$

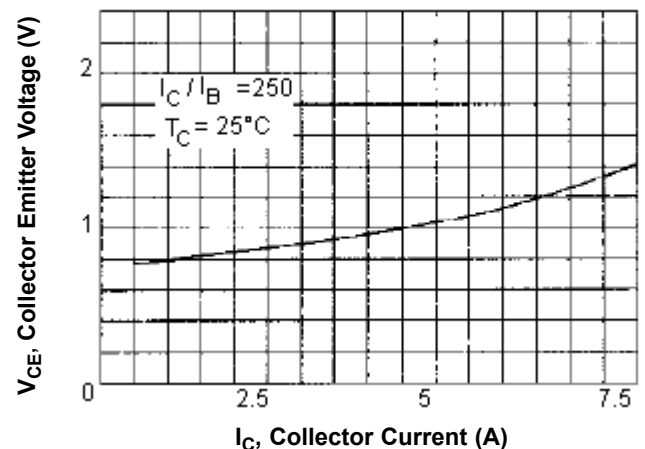


Darlington Transistors



BDW93, BDW94 Series

PNP BDW94B and C

$V_{CE(Sat)} - I_C$

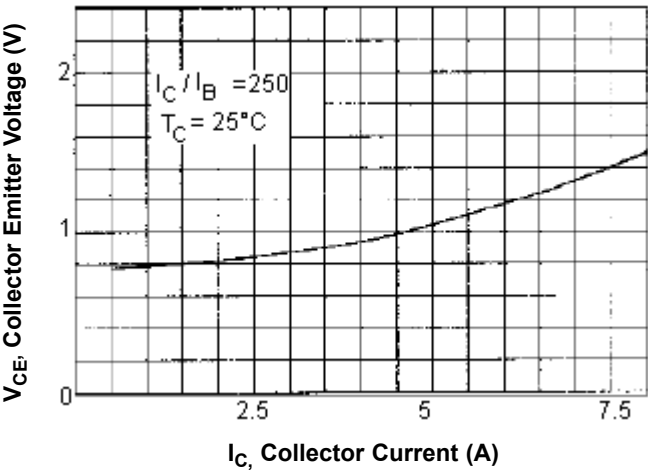

Specification Table

I_C (av) Maximum (A)	V_{CEO} Maximum V	hFE Minimum at $I_C = 5$ A	P_{tot} at 25°C (W)	Package	Type	Part Number			
12	80	750	80	TO-220	NPN	BDW94B			
						BDW93B			
	100				PNP	BDW93C			
						BDW94C			

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

