


GSD

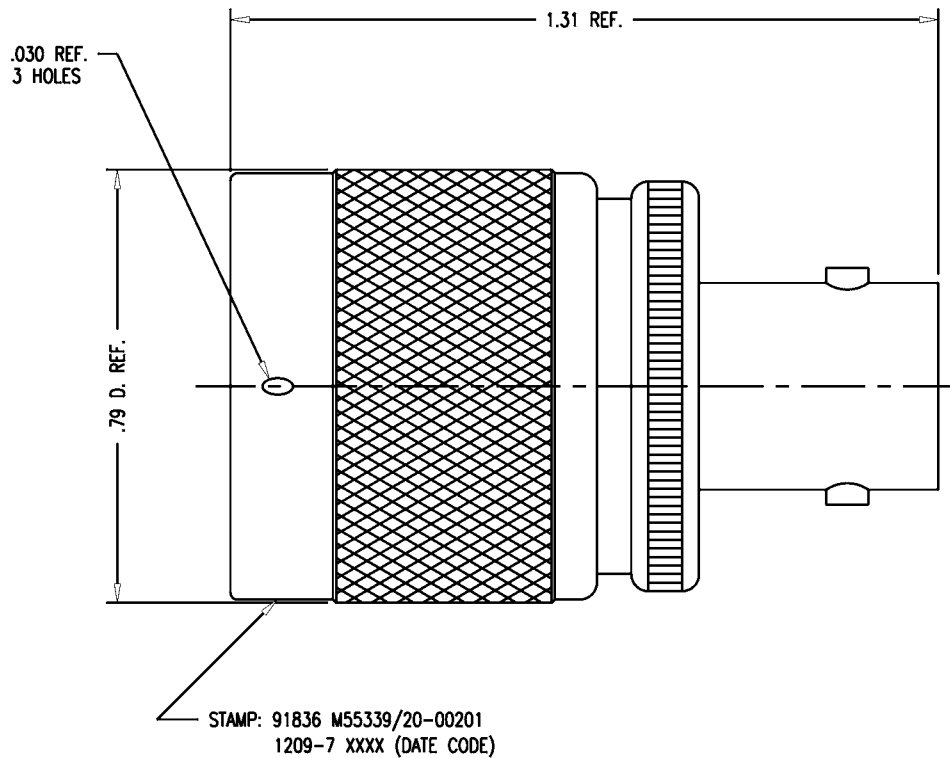

NOTES:

1. INTERFACE PER MIL-STD-348 FIGURES 304-1 AND 301-2.
2. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - CONTACT: BERYLLIUM COPPER, ASTM-B-196
 - C-RING } PHOSPHOR BRONZE, ASTM-B-103
 - OUTER CONTACT }
 - ALL OTHER PARTS: BRASS, ASTM-B16
3. FINISHES:
 - CONTACT: GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 500
 - FREQUENCY RANGE: DC-4 GHz
 - VOLTAGE RATING: 500 VOLTS RMS

GSD

REVISIONS

ISSUE	CHANGES
6	CN 36131 C REDRAWN ME 02/28/95

M55339/20-00201

1209-7

QGS0200

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADAPTER, N-BNC, M-F

DRAWN	ME	DATE	02/28/95
DESIGN	TK	DATE	03/01/95
APPR.	VLS	DATE	04/20/95

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M55339/20-00201