



SAW Components

Data Sheet B7735

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a dark, textured surface with a faint globe and a stylized wave or ribbon-like shape. The overall effect is futuristic and high-tech.



SAW Components

B7735

Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Features

- Low-loss RF filter for mobile telephone EGSM system, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- Excellent symmetry
- Impedance transformation from 50 Ω to 150 Ω
- Suitable for GPRS class 1 to 12
- Ceramic package for Surface Mounted Technology (SMT)
- Pb-free

Chip sized SAW package DCS6K

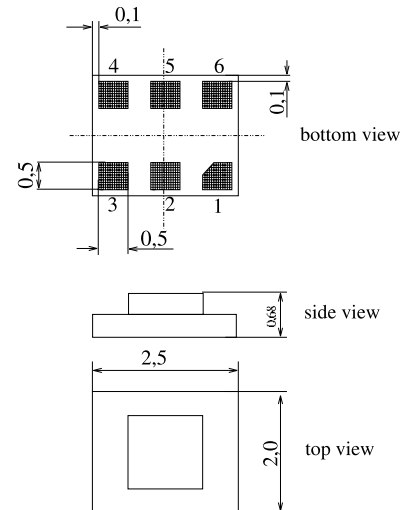


Terminals

- Ni, gold-plated

Dimensions in mm

Pin configuration

2	Input, unbalanced
4, 6	Balanced outputs
1, 3, 5	To be grounded
1, 5	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B7735	B39941-B7735-C910	C61157-A7-A97	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	100	V	
Input power at GSM850, GSM900	P_{IN}	15	dBm	
GSM1800 and GSM1900 Tx bands				



SAW Components

B7735

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega$
Terminating load impedance: $Z_L = 150 \text{ } \Omega \parallel 100 \text{ nH}$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	925,0 ... 960,0 MHz		—	2,3	2,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	925,0 ... 960,0 MHz		—	0,9	1,4	dB
Input VSWR						
	925,0 ... 960,0 MHz		—	1,8	2,2	
Output VSWR						
	925,0 ... 960,0 MHz		—	1,8	2,2	
Output phase balance $\phi(S_{31}) - \phi(S_{21})$						
	925,0 ... 960,0 MHz		-10	—	10	degree
Output amplitude balance (S_{31}/S_{21})						
	925,0 ... 960,0 MHz		-2	—	2	dB
Diff. to common mode suppression	S_{sc12}					
	925,0 ... 960,0 MHz		20	26	—	dB
	824,0 ... 995,0 MHz		20	26	—	dB
	1648,0 ... 1990,0 MHz		20	50	—	dB
	3296,0 ... 3980,0 MHz		20	29	—	dB
Attenuation	α					
	0,0 ... 880,0 MHz		50	68	—	dB
	880,0 ... 905,0 MHz		30	52	—	dB
	905,0 ... 915,0 MHz		20	29	—	dB
	980,0 ... 1050,0 MHz		23	34	—	dB
	1050,0 ... 1850,0 MHz		50	55	—	dB
	1850,0 ... 1920,0 MHz		50	71	—	dB
	1920,0 ... 2880,0 MHz		50	60	—	dB
	2880,0 ... 4000,0 MHz		40	59	—	dB
	4000,0 ... 6000,0 MHz		40	60	—	dB



SAW Components

B7735

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10$ to $+75$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 150 \Omega \parallel 100 \text{ nH}$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
925,0 ... 960,0 MHz			—	2,5	3,0 ¹⁾	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
925,0 ... 960,0 MHz			—	1,2	1,7	dB
Input VSWR						
925,0 ... 960,0 MHz			—	1,8	2,2	
Output VSWR						
925,0 ... 960,0 MHz			—	1,8	2,2	
Output phase balance $\phi(S_{31}) - \phi(S_{21})$						
925,0 ... 960,0 MHz			-10	—	10	degree
Output amplitude balance (S_{31} / S_{21})						
925,0 ... 960,0 MHz			-2	—	2	dB
Diff. to common mode suppression	S_{sc12}					
925,0 ... 960,0 MHz			20	38	—	dB
824,0 ... 995,0 MHz			20	29	—	dB
1648,0 ... 1990,0 MHz			20	50	—	dB
3296,0 ... 3980,0 MHz			20	31	—	dB
Attenuation	α					
0,0 ... 880,0 MHz			50	68	—	dB
880,0 ... 905,0 MHz			30	52	—	dB
905,0 ... 915,0 MHz			20	29	—	dB
980,0 ... 1050,0 MHz			23	30	—	dB
1050,0 ... 1850,0 MHz			50	55	—	dB
1850,0 ... 1920,0 MHz			50	71	—	dB
1920,0 ... 2880,0 MHz			50	60	—	dB
2880,0 ... 4000,0 MHz			40	59	—	dB
4000,0 ... 6000,0 MHz			40	60	—	dB

¹⁾ 5,0 dB for $T = -30$ °C to $+85$ °C



SAW Components

B7735


Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Transfer function (measurement)

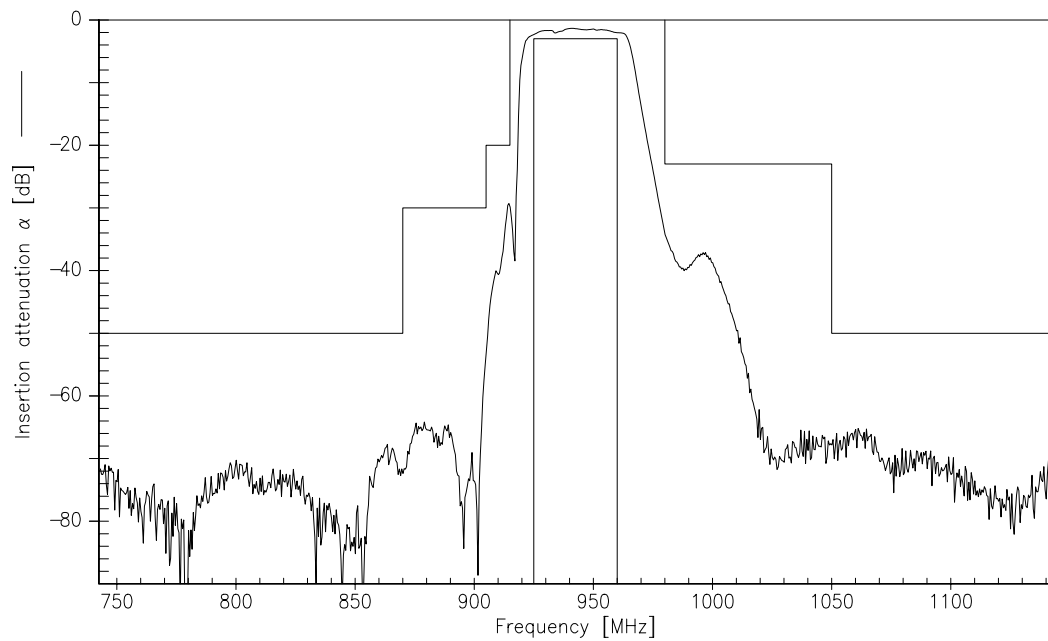

Transfer function (wideband measurement)

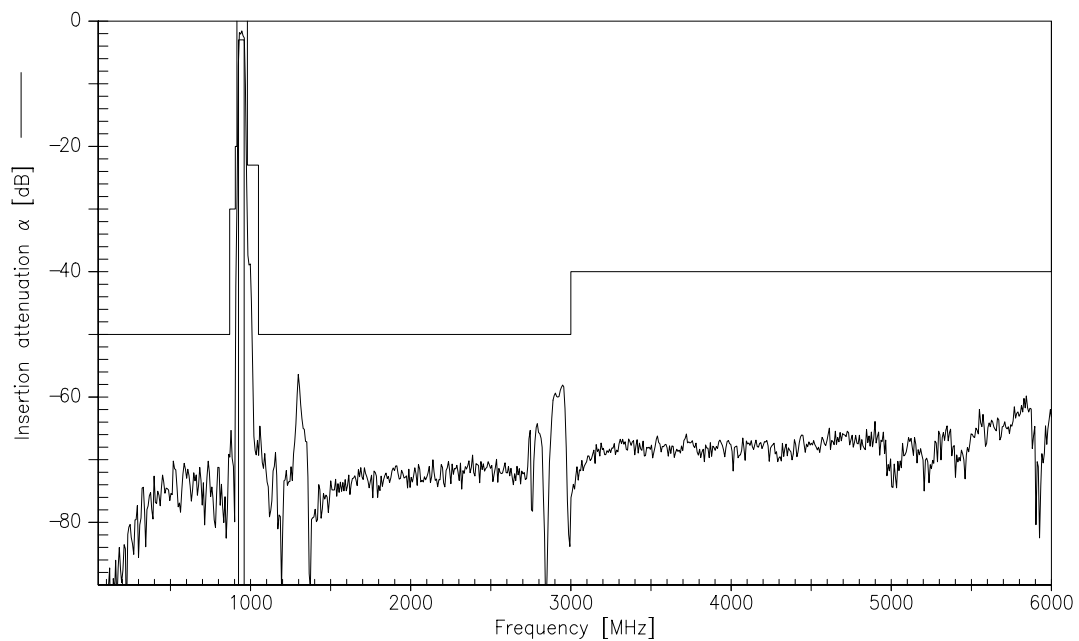



SAW Components	B7735
Low-Loss Filter for Mobile Communication	942,5 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.