

Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

REMINDERS

- Product information in this catalog is as of October 2014. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that TAIYO YUDEN CO., LTD. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact TAIYO YUDEN CO., LTD. for further details of product specifications as the individual specification is available.

- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact TAIYO YUDEN CO., LTD. for more detail in advance.

Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel").

It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.

- Please note that TAIYO YUDEN CO., LTD. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. TAIYO YUDEN CO., LTD. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

MULTILAYER CERAMIC DEVICES / DIPLEXERS / BALUNS



ORDERING CODE

REFLOW

F I △ 2 1 2 B 2 4 5 0 2 6 - T

① Device code	② Electrode code	③ Dimensions code [mm]	④ Special Code	⑤ Frequency [MHz]	⑥ Spec Code	⑦ Packaging
FI High Frequency Devices	△ With Plating △ Blank space	325 3.2×2.5 212 2.0×1.25 168 1.6×0.8 105 1.0×0.5	B Band Pass Type L Low Pass Type C Balance Type P Diplexer T Balun D Dual Type	example 2450 2400~2500 0620 470~770	01~ Individual Spec	-T Tape & Reel

EXTERNAL DIMENSIONS/STANDARD QUANTITY

FI 325P Type	FI 212B Type	FI 212B190223	FI 212L Type
FI 212C245033/FI 212C245034	FI 168B/L Type	FI 212C Type	FI 212C249566/FI 212C355068
FI 212C245075	FI 212P Type	FI 168T Type	FI 168D Type
FI 168P Type	FI 105B/L Type		

FI 325P Type	FI 212C2450XX	FI 212C249566 FI 212C355068	FI 212P089208/ FI 212P085912	FI 212P089213/ FI 212P085909	FI 168T Type	FI 168P245010/ FI 168P245023	FI 168D087018	FI 168P 157519
(1) GND	Balanced	Balanced	GND	GND	Unbalance	GND	High Band IN	GND
(2) Common	GND	GND	Common Port	Common Port	GND	Low Band	GND	High Band
(3) GND	Balanced	Balanced	GND	GND	Balanced	Common	Low Band IN	Common
(4) High Band	GND	GND	High Band	Low Band	Balanced	High Band	Low Band OUT	Low Band
(5) GND	Unbalance	Unbalance	GND	GND	GND	—	GND	—
(6) Low Band	DC	NC or DC	Low Band	High Band	NC	—	High Band OUT	—
(7) —	NC	NC	—	—	—	—	—	—
(8) —	GND	GND	—	—	—	—	—	—

Type	Standard Quantity [pcs]
325P	2000
212B	
212L	3000~
212C	6000
212P	
168B	
168L	4000~
168T	8000
168D	
168P	
105B	10000
105L	

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

PART NUMBERS

● Multi-layer Device band pass Type

Applications	External dimensions	Ordering code	Notes
2.4GHz W-LAN Bluetooth	2.0×1.25×1.0 max.	FI 212B245026/FI 212B245027	
	1.6×0.8×0.5 max.	FI 168B245001	
	1.0×0.5×0.4 max.	FI 105B245024	
WiMAX	1.6×0.8×0.5 max.	FI 168B250065	
PHS	2.0×1.25×1.0 max.	FI 212B190223	

● Multi-layer Device low pass Type

Applications	External dimensions	Ordering code	Notes
Digital TV	1.6×0.8×0.45 max.	FI 168L062005	Thickness 0.45 mm max.
WiMAX	1.6×0.8×0.45 max.	FI 168L2200G9	Thickness 0.45 mm max.
	1.6×0.8×0.45 max.	FI 168L259764	Thickness 0.45 mm max.
2.4GHz W-LAN Bluetooth	1.0×0.5×0.4 max.	FI 105L087038	Thickness 0.4 mm max.
	1.0×0.5×0.4 max.	FI 105L250014	Thickness 0.4 mm max.
Other	1.6×0.8×0.45 max.	FI 168D087018	Dual band LPF

● Multi-layer diplexer

Applications	External dimensions	Ordering code	Notes
W-LAN	1.6×0.8×0.65 max.	FI 168P157525	
		FI 168P245010	
		FI 168P245014	
		FI 168P245023	
Cellular	2.0×1.25×1.0 max.	FI 212P082931	
		FI 212P0829G2	
		FI 212P082934	
		FI 212P082935	
		FI 212P089208	
		FI 212P089213	
		FI 212P085909	
GPS/ 2.4GHz W-LAN	1.6×0.8×0.65 max.	FI 212P085912	
		FI 168P157519	

● Multi-layer Device balance Type


Applications	External dimensions	Ordering code	Notes
Bluetooth	2.0×1.25×1.0 max.	FI 212C245032	Conjugated match to CSR BC4
	2.0×1.25×1.0 max.	FI 212C245033	Conjugated match to CSR BC3
	2.0×1.25×1.0 max.	FI 212C245036	Conjugated match to CSR BC5
	2.0×1.25×0.7 max.	FI 212C245075	Conjugated match to CSR BC5FM, BC6ROM
WiMAX	2.0×1.25×0.5 max.	FI 212C249566	Thickness 0.5 mm max.
	2.0×1.25×0.5 max.	FI 212C355068	Thickness 0.5 mm max.

● Multi-layer Balun

Applications	External dimensions	Ordering code	Notes
BS	1.6×0.8×0.5 max.	FI 168T155021	Thickness 0.5 mm max.


ELECTRICAL CHARACTERISTICS·TYPICAL CHARACTERISTICS

FI 212B245026




Pass band frequency	2400 - 2500 MHz
Insertion loss at pass band	2.6 dB max. (25 deg-C) 2.9 dB max. (-40~+85 deg-C)
Ripple at pass band	1.0 dB max.
V.S.W.R. at pass band	2.0 max.
Attenuation	40 dB min. (800 - 960 MHz) 30 dB min. (1710 - 1990 MHz) 25 dB min. (2110 - 2170 MHz) 30 dB min. (4800 - 5000 MHz) 30 dB min. (7200 - 7500 MHz)
Impedance	50 ohm

FI 105B245024




Pass band frequency	2400-2500MHz
Insertion loss at pass band	3.0 dB max. (25 deg-C) 3.3 dB max. (-40~+85 deg-C)
Ripple at pass band	1.0 dB max.
V.S.W.R. at pass band	2.2 max.
Attenuation	25 dB min. (880 - 960 MHz) 22 dB min. (1710 - 1910 MHz) 20 dB min. (4800 - 5000 MHz) 20 dB min. (7200 - 7500 MHz)

FI 212B245027




Pass band frequency	2400-2500MHz
Insertion loss at pass band	1.4 dB max. (25 deg-C) 1.7 dB max. (-40~+85 deg-C)
Ripple at pass band	1.0 dB max.
V.S.W.R. at pass band	2.0 max.
Attenuation	30 dB min. (800 - 915 MHz) 30 dB min. (1710 - 1910 MHz) 6 dB min. (2110 - 2170 MHz) 20 dB min. (4800 - 5000 MHz)

FI 168B250065




Pass band frequency	2300 - 2700 MHz
Insertion loss at pass band	2.4 dB max. (25 deg-C) 2.6 dB max. (-30~+85 deg-C)
Insertion loss at pass band	2.3 dB max. (25 deg-C) 2.5 dB max. (-30~+85 deg-C)
Ripple at pass band	1.4 dB max.
Ripple at pass band	1.3 dB max.
V.S.W.R. at pass band	2.4 max.
V.S.W.R. at pass band	1.3 max.
Attenuation	15 dB min. (1500 - 2000 MHz) 10 dB min. (4600 - 8000 MHz)
Impedance	50 ohm

FI 168B245001



Pass band frequency	2400 - 2500MHz
Insertion loss at pass band	2.2 dB (25deg-C) 2.5 dB (-30~+85deg-C)
Ripple at pass band	1.0 dB max.
V.S.W.R. at pass band	2.1 max.
Attenuation	25 dB min. (880 - 960MHz) 25 dB min. (1710 - 1910MHz) 20 dB min. (4800 - 5000MHz) 20 dB min. (7200 - 7500MHz)
Impedance	50 ohm


FI 212B190223



Pass band frequency	1884-1930MHz
Insertion Loss at pass band	1.7 dB max. (25deg-C) 2.0 dB max. (-30~+85deg-C)
Insertion Loss at pass band	1.7 dB max. (25deg-C) 2.0 dB max. (-30~+85deg-C)
Ripple at Pass band	1.0 dB max.
V.S.W.R. at Pass band	2.0 max.
Attenuation	30 dB min. (1420MHz) 18 dB min. (3768-3860MHz)
Impedance	50 ohm


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

FI 168L062005




Pass band frequency	470 ~ 770 MHz
Insertion loss at 470-600MHz	1.2 dB max. (25 deg-C)
Insertion loss at 600-710MHz	1.3 dB max. (-30~+85 deg-C)
Insertion loss at 710-770MHz	2.2 dB max. (25 deg-C)
Insertion loss at 470 ~ 710 MHz	2.4 dB max. (-30~+85 deg-C)
Ripple at 470 ~ 710 MHz	4.0 dB max. (25 deg-C)
V.S.W.R.	4.4 dB max. (-30~+85 deg-C)
	1.4 dB max.
	2.0 max. (470 ~ 710 MHz)
	2.5 max. (710 ~ 770 MHz)
Attenuation	25 dB min. (888 ~ 925 MHz)
	21 dB min. (888 ~ 925 MHz)
	(-30~+85 deg-C)
	25 dB min. (940 ~ 960 MHz)
	27 dB min. (1429 ~ 1453 MHz)
	26 dB min. (1920 ~ 1980 MHz)
	26 dB min. (2400 ~ 2500 MHz)
Impedance	50 ohm

FI 168L2200G9




Pass band frequency	1700 ~ 2170 MHz
	2170 ~ 2500 MHz
	2500 ~ 2700 MHz
Insertion loss at 1700-2170MHz	0.5 dB max. (25 deg-C)
Insertion loss at 2170-2500MHz	0.55 dB max. (-30~+85 deg-C)
Insertion loss at 2500-2700MHz	0.65 dB max. (25 deg-C)
Return loss at 1700-2700MHz	0.75 dB max. (-30~+85 deg-C)
	0.9 dB max. (25 deg-C)
	1.0 dB max. (-30~+85 deg-C)
Attenuation	10 dB min.
	25 dB min. (3400 MHz)
	22 dB min. (3400 ~ 5400 MHz)
	20 dB min. (5400 ~ 8100 MHz)
Impedance	50 ohm

FI 168L259764




Pass band frequency	470 ~ 770 MHz
	2300 ~ 2700 MHz
Insertion loss at 470-770MHz	0.5 dB max. (25 deg-C)
Insertion loss at 2300-2700MHz	0.6 dB max. (-30~+85 deg-C)
Ripple at 470 ~ 770 MHz	0.5 dB max. (25 deg-C)
Ripple at 2300 ~ 2700 MHz	0.6 dB max. (-30~+85 deg-C)
V.S.W.R. at 470 ~ 770 MHz	0.3 dB max.
V.S.W.R. at 2300 ~ 2700 MHz	0.3 dB max.
	2.0 max.
	2.0 max.
Attenuation	20 dB min. (4600 ~ 5400 MHz)
	20 dB min. (6900 ~ 8100 MHz)
Impedance	50 ohm

FI 105L087038




Pass band frequency	824-915MHz
Insertion loss at 824 ~ 915 MHz	0.75 dB max. (-30~+85 deg-C)
V.S.W.R. at 2400 ~ 2500 MHz	1.5 max.
Attenuation	23 dB min. (1648 ~ 1830 MHz)
	23 dB min. (2472 ~ 2745 MHz)
Impedance	50 ohm

FI 105L250014




Pass band frequency	2400-2500MHz
Insertion loss at 2400 ~ 2500 MHz	0.45 dB max. (25 deg-C)
V.S.W.R. at 2400 ~ 2500 MHz	0.55 dB max. (-40~+85 deg-C)
Attenuation	1.7 max.
	21 dB min. (4800 ~ 5000 MHz)
	21 dB min. (7200 ~ 7500 MHz)
Impedance	50 ohm

FI 168D087018




Low band	
Pass band frequency	824 ~ 915 MHz
Insertion loss at 824 ~ 915 MHz	0.6 dB max. (-30 to +85 Deg.C)
V.S.W.R. at 824 ~ 915 MHz	1.5 max.
Attenuation	25 dB min. (1648-1830MHz)
	25 dB min. (2472-2745MHz)
Impedance	50 ohm
High band	
Pass band frequency	1710 ~ 1910 MHz
Insertion loss at 1710 ~ 1910 MHz	0.6 dB max. (-30 to +85 Deg.C)
V.S.W.R. at 824 ~ 915 MHz	1.5 max.
Attenuation	25 dB min. (3420-3820MHz)
	25 dB min. (5130-5730MHz)
Impedance	50 ohm
Isolation	
In to In/Out to Out	27 dB min. (824-915MHz)
	30 dB min. (1710-1910MHz)
In to Out	30 dB min. (824-915MHz)
	30 dB min. (1710-1910MHz)

FI 212C245032



Pass band frequency	2400-2500MHz
Insertion loss at pass band	3.7 dB (25deg-C)
	4.0 dB (-30~+85deg-C)
Ripple at pass band	1.0 dB max.
Unbalanced port V.S.W.R. at pass band	2.0 max.
Balanced port V.S.W.R. at pass band	2.0 max.
Amplitude Imbalance at pass band	2.0 dB max.
Phase Imbalance at pass band	180 +/- 10 deg
Attenuation	35 dB min. (880-960MHz)
	20 dB min. (1710-1990MHz)
	20 dB min. (1990-2170MHz)
	20 dB min. (4800-5000MHz)
Unbalanced Port Impedance	50 ohm
Balanced Port Impedance	Conjugated match to CSR BC4


FI 212C245033



Pass band frequency	2400-2500MHz
Insertion loss at pass band	2.7 dB (25deg-C)
	3.0 dB (-30~+85deg-C)
Ripple at pass band	1.0 dB max.
Unbalanced port V.S.W.R. at pass band	2.0 max.
Balanced port V.S.W.R. at pass band	2.0 max.
Amplitude Imbalance at pass band	2.0 dB max.
Phase Imbalance at pass band	180 +/- 10 deg
Attenuation	25 dB min. (880-960MHz)
	15 dB min. (1710-1990MHz)
	15 dB min. (1990-2170MHz)
	15 dB min. (4800-5000MHz)
Unbalanced Port Impedance	50 ohm
Balanced Port Impedance	Conjugated match to CSR BC3


ELECTRICAL CHARACTERISTICS·TYPICAL CHARACTERISTICS

FI 212C245036

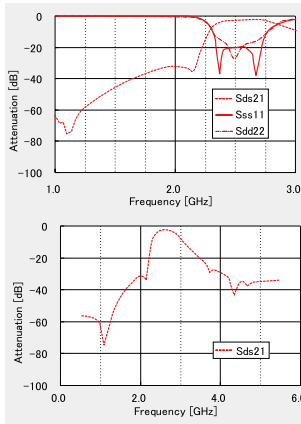


Pass band frequency	2400-2500MHz
Insertion loss at pass band	3.7 dB (25deg-C)
Ripple at pass band	4.0 dB (-30~+85deg-C)
Unbalanced port V.S.W.R. at pass band	2.0 max.
Balanced port V.S.W.R. at pass band	2.0 max.
Amplitude Imbalance at pass band	2.0 dB max.
Phase Imbalance at pass band	180 +/- 10 deg
Attenuation	35 dB min. (880-960MHz)
	20 dB min. (1710-1990MHz)
	15 dB min. (1990-2170MHz)
	20 dB min. (4800-5000MHz)
Unbalanced Port Impedance	50 ohm
Balanced Port Impedance	Conjugated match to CSR BC5

FI 212C355068

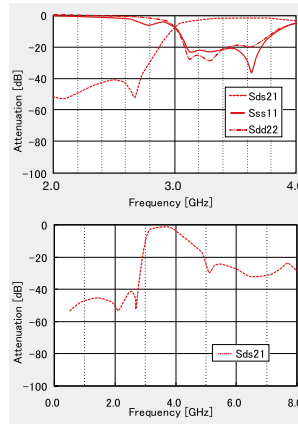


Pass band frequency	3300-3800MHz
Insertion loss at pass band	2.5 dB (25 deg-C)
Ripple at pass band	2.8 dB (-30~+85 deg-C)
Unbalanced port V.S.W.R. at pass band	2.3 max.
Balanced port V.S.W.R. at pass band	2.3 max.
Amplitude imbalance at pass band	2.0 dB max.
Phase imbalance at pass band	180 +/- 12 deg
Attenuation	40 dB min. (1710-1990MHz)
	40 dB min. (2110-2170MHz)
	35 dB min. (2400-2500MHz)
	15 dB min. (4900-5850MHz)
Impedance	50:100

FI 212C245075

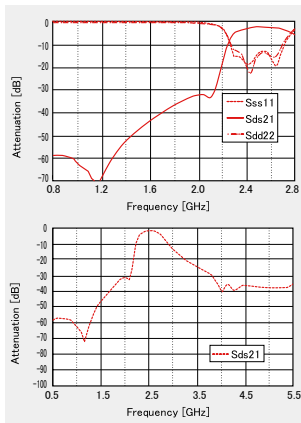


Pass band frequency	2400-2500MHz
Insertion loss at pass band	3.7 dB (25deg-C)
Ripple at pass band	4.0 dB (-30~+85deg-C)
Unbalanced port V.S.W.R. at pass band	2.2 max.
Balanced port V.S.W.R. at pass band	2.2 max.
Amplitude Imbalance at pass band	2.0 dB max.
Phase Imbalance at pass band	180 +/- 10 deg
Attenuation	40 dB min. (880-960MHz)
	18 dB min. (1710-1990MHz)
	12 dB min. (1990-2170MHz)
	30 dB min. (4800-5000MHz)
Unbalanced Port Impedance	50 ohm
Balanced Port Impedance	Conjugated match to CSR BC5FM.BC6ROM

FI 168P157525




Low band	
Pass band frequency0	824-960MHz
Pass band frequency1	1558-1585MHz
Pass band frequency2	1585-1610MHz
Insertion loss at 824-960MHz	0.50 dB max. (25 deg-C)
Insertion loss at 1558-1585MHz	0.60 dB max. (-40~+85 deg-C)
Insertion loss at 1585-1610MHz	0.40 dB max. (25 deg-C)
Insertion loss at 1585-1610MHz	0.50 dB max. (-40~+85 deg-C)
Insertion loss at 1585-1610MHz	0.45 dB max. (25 deg-C)
Insertion loss at 1585-1610MHz	0.55 dB max. (-40~+85 deg-C)
V.S.W.R. at 824-960MHz	2.0 max.
V.S.W.R. at 1558-1585MHz	2.0 max.
V.S.W.R. at 1585-1610MHz	2.0 max.
Attenuation	13 dB min. (2400-2500MHz)
Impedance	50 ohm
High band	
Pass band frequency	2400 - 2500 MHz
Insertion loss at 2400 - 2500 MHz	0.60 dB max. (25 deg-C)
Insertion loss at 2400 - 2500 MHz	0.70 dB max. (-40~+85 deg-C)
V.S.W.R. at 2400 - 2500 MHz	2.0 max.
Attenuation	12 dB min. (824-960MHz)
Attenuation	23 dB min. (1558-1585MHz)
Attenuation	12 dB min. (1585-1610MHz)
Impedance	50 ohm

FI 212C249566

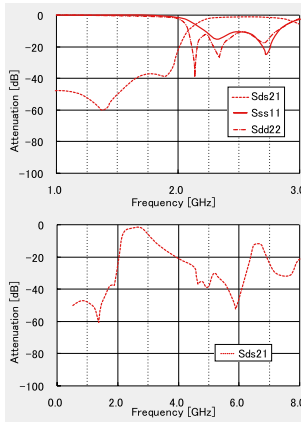

Pass band frequency	2300-2690MHz
Insertion loss at 2300-2495MHz	2.9 dB max. (25 deg-C)
Insertion loss at 2300-2495MHz	3.2 dB max. (-30~+85 deg-C)
Ripple at 2300-2495MHz	1.2 dB max.
Unbalanced port V.S.W.R. at 2300-2495MHz	2.3 max.
Balanced port V.S.W.R. at 2300-2495MHz	2.3 max.
Amplitude Imbalance at 2300-2495MHz	2.0 dB max.
Phase Imbalance at 2300-2495MHz	180 +/- 12 deg
Insertion loss at 2495-2690MHz	2.3 dB max. (25 deg-C)
Insertion loss at 2495-2690MHz	2.6 dB max. (-30~+85 deg-C)
Ripple at 2495-2690MHz	1.0 dB max.
Unbalanced port V.S.W.R. at 2495-2690MHz	2.3 max.
Balanced port V.S.W.R. at 2495-2690MHz	2.3 max.
Amplitude Imbalance at 2495-2690MHz	2.0 dB max.
Phase Imbalance at 2495-2690MHz	180 +/- 12 deg
Attenuation	40 dB Min. (824-960MHz)
	15 dB Min. (1710-1990MHz)
	20 dB Min. (4900-5850MHz)
Impedance	50 : 100


FI 168P245010



Low band	
Pass band frequency	2400-2500MHz
Insertion loss at 2400-2500MHz	0.40 dB max. (25 deg-C)
Insertion loss at 2400-2500MHz	0.50 dB max. (-40~+85 deg-C)
V.S.W.R. at 2400 - 2500 MHz	2.0 max.
Attenuation	20 dB min. (4900-5850MHz)
Attenuation	15 dB min. (5850-8500MHz)
Impedance	50 ohm
High band	
Pass band frequency	4900 - 5850 MHz
Insertion loss at 4900 - 5850 MHz	0.60 dB max. (25 deg-C)
Insertion loss at 4900 - 5850 MHz	0.70 dB max. (-40~+85 deg-C)
V.S.W.R. at 4900 - 5850 MHz	2.0 max.
Attenuation	20 dB min. (2400-2500MHz)
Impedance	50 ohm


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) .

FI 168P245014




Low band	
Pass band frequency	2400-2500MHz
Insertion loss	0.40 dB max. (25 deg-C)
at 2400-2500MHz	0.50 dB max. (-40~+85 deg-C)
V.S.W.R.	2.0 max.
at 2400 - 2500 MHz	20 dB min. (4900-5850MHz)
Attenuation	15 dB min. (5850-8500MHz)
Impedance	50 ohm
High band	
Pass band frequency	4900 - 5850 MHz
Insertion loss	0.60 dB max. (25 deg-C)
at 4900 - 5850 MHz	0.70 dB max. (-40~+85 deg-C)
V.S.W.R.	2.0 max.
at 4900 - 5850 MHz	20 dB min. (2400-2500MHz)
Attenuation	20 dB min. (2400-2500MHz)
Impedance	50 ohm

FI 168P245023




Low band	
Pass band frequency	2400-2500MHz
Insertion loss	0.60 dB max. (25 deg-C)
at 2400-2500MHz	0.70 dB max. (-40~+85 deg-C)
V.S.W.R.	2.0 max.
at 2400 - 2500 MHz	20 dB min. (4800-6000MHz)
Attenuation	20 dB min. (7200-7500MHz)
Impedance	50 ohm
High band	
Pass band frequency	4900 - 5950 MHz
Insertion loss	0.80 dB max. (25 deg-C)
at 4900 - 5850 MHz	0.95 dB max. (-40~+85 deg-C)
V.S.W.R.	2.0 max.
at 4900 - 5850 MHz	20 dB min. (1800-2500MHz)
Attenuation	20 dB min. (9800-11900MHz)
Impedance	50 ohm

FI 212P082931




Low band	
Pass band frequency1	698 - 894 MHz
Pass band frequency2	880 - 960 MHz
Insertion loss	0.50 dB max. (+25 Deg.C)
at 698 - 894 MHz	0.60 dB max. (-40 to +85 Deg.C)
Insertion loss	0.70 dB max. (+25 Deg.C)
at 880 - 960 MHz	0.80 dB max. (-40 to +85 Deg.C)
V.S.W.R.	2.0 max.
at 698 - 894 MHz	2.0 max.
V.S.W.R.	2.0 max.
at 880 - 960 MHz	13dB min. (1420-2690MHz)
Attenuation	50 ohm
Impedance	
High band	
Pass band frequency1	1420 - 1520 MHz
Pass band frequency2	1560 - 1610 MHz
Pass band frequency3	1710 - 2170 MHz
Pass band frequency4	2300 - 2690 MHz
Insertion loss	0.70 dB max. (+25 Deg.C)
at 1420 - 1520 MHz	0.80 dB max. (-40 to +85 Deg.C)
Insertion loss	0.50 dB max. (+25 Deg.C)
at 1560 - 1610 MHz	0.60 dB max. (-40 to +85 Deg.C)
Insertion loss	0.50 dB max. (+25 Deg.C)
at 1710 - 2170 MHz	0.60 dB max. (-40 to +85 Deg.C)
Insertion loss	0.50 dB max. (+25 Deg.C)
at 2300 - 2690 MHz	0.60 dB max. (-40 to +85 Deg.C)
V.S.W.R.	2.0 max.
at 1420 - 2690 MHz	13dB min. (698-960MHz)
Attenuation	50 ohm
Impedance	

FI 212P0829G2




Low band	
Pass band frequency	698 - 960 MHz
Insertion loss	0.27 dB max. (+25 Deg.C)
at 698 - 960 MHz	0.32 dB max. (-40 to +85 Deg.C)
V.S.W.R.	2.0 max.
at 698 - 960 MHz	13dB min. (1710-2690MHz)
Attenuation	50 ohm
Impedance	
High band	
Pass band frequency	1710 - 2690 MHz
Insertion loss	0.45 dB max. (+25 Deg.C)
at 1710 - 2690 MHz	0.55 dB max. (-40 to +85 Deg.C)
V.S.W.R.	2.0 max.
at 698 - 960 MHz	19dB min. (698-960MHz)
Attenuation	50 ohm
Impedance	

FI 212P082934




Low band	
Pass band frequency	698 - 960 MHz
Insertion loss	0.50 dB max. (-40 to +85 Deg.C)
at 698 - 960 MHz	
V.S.W.R.	1.4 max.
at 698 - 960 MHz	15dB min. (1554-1580MHz)
Attenuation	25dB min. (1710-2110MHz)
	25dB min. (2110-2155MHz)
	25dB min. (2155-2690MHz)
	12dB min. (2155-7830MHz)
Impedance	50 ohm
High band	
Pass band frequency1	1710 - 2170 MHz
Pass band frequency2	2500 - 2690 MHz
Insertion loss	0.50 dB max. (-40 to +85 Deg.C)
at 1710 - 2170 MHz	
Insertion loss	0.55 dB max. (-40 to +85 Deg.C)
at 2500 - 2690 MHz	
V.S.W.R.	1.4 max.
at 1710 - 2170 MHz	
V.S.W.R.	1.8 max.
at 2500 - 2690 MHz	
Attenuation	17dB min. (0.3-960MHz)
Impedance	50 ohm

FI 212P082935




Low band	
Pass band frequency	698 - 960 MHz
Insertion loss	0.50 dB max. (-40 to +85 Deg.C)
at 698 - 960 MHz	
V.S.W.R.	1.4 max.
at 698 - 960 MHz	15dB min. (1554-1580MHz)
Attenuation	25dB min. (1710-2110MHz)
	25dB min. (2110-2155MHz)
	25dB min. (2155-2690MHz)
	12dB min. (2155-7830MHz)
Impedance	50 ohm
High band	
Pass band frequency1	1710 - 2170 MHz
Pass band frequency2	2500 - 2690 MHz
Insertion loss	0.50 dB max. (-40 to +85 Deg.C)
at 1710 - 2170 MHz	
Insertion loss	0.55 dB max. (-40 to +85 Deg.C)
at 2500 - 2690 MHz	
V.S.W.R.	1.4 max.
at 1710 - 2170 MHz	
V.S.W.R.	1.8 max.
at 2500 - 2690 MHz	
Attenuation	17dB min. (0.3-960MHz)
Impedance	50 ohm

FI 212P089208




Low band	
Pass band frequency	698 ~ 960 MHz
Insertion loss at 698 ~ 960 MHz	0.27 dB max. (+25 Deg.C) 0.32 dB max. (-40 to +85 Deg.C)
V.S.W.R. at 698 ~ 960 MHz	2.0 max.
Attenuation	13dB min. (1710-2170MHz)
Impedance	50 ohm
High band	
Pass band frequency	1710 ~ 2170 MHz
Insertion loss at 1710 ~ 2170 MHz	0.45 dB max. (+25 Deg.C) 0.55 dB max. (-40 to +85 Deg.C)
V.S.W.R. at 698 ~ 960 MHz	2.0 max.
Attenuation	19dB min. (698-960MHz)
Impedance	50 ohm

FI 212P089213




Low band	
Pass band frequency	698 ~ 960 MHz
Insertion loss at 698 ~ 960 MHz	0.27 dB max. (+25 Deg.C) 0.32 dB max. (-40 to +85 Deg.C)
V.S.W.R. at 698 ~ 960 MHz	2.0 max.
Attenuation	13dB min. (1710-2170MHz)
Impedance	50 ohm
High band	
Pass band frequency	1710 ~ 2170 MHz
Insertion loss at 1710 ~ 2170 MHz	0.45 dB max. (+25 Deg.C) 0.55 dB max. (-40 to +85 Deg.C)
V.S.W.R. at 698 ~ 960 MHz	2.0 max.
Attenuation	19dB min. (698-960MHz)
Impedance	50 ohm

FI 212P085909




Low band	
Pass band frequency	698~960 MHz
Insertion loss at 698 ~ 960 MHz	0.70 dB max. (+25 deg.-C) 0.75 dB max. (-30~+85 deg.-C)
V.S.W.R. at 698 ~ 960 MHz	1.6 max.
Attenuation	19dB min. (1558-1570MHz) 20dB min. (1570-1580MHz) 19dB min. (1580-1610MHz)
Impedance	50 ohm
High band	
Pass band frequency 1	1558-1570MHz
Pass band frequency 2	1570-1580MHz
Pass band frequency 3	1580-1610MHz
Insertion loss at 1558 ~ 1570 MHz	0.75 dB max. (+25 deg.-C) 0.85 dB max. (-30~+85 deg.-C)
Insertion loss at 1570 ~ 1580 MHz	0.70 dB max. (+25 deg.-C) 0.80 dB max. (-30~+85 deg.-C)
Insertion loss at 1580 ~ 1610 MHz	0.70 dB max. (+25 deg.-C) 0.80 dB max. (-30~+85 deg.-C)
V.S.W.R. at 1558 ~ 1570 MHz	1.6 max.
V.S.W.R. at 1570 ~ 1580 MHz	1.6 max.
V.S.W.R. at 1580 ~ 1610 MHz	1.6 max.
Attenuation	35dB min. (698-824MHz) 42dB min. (824-894MHz) 25dB min. (894-960MHz)
Impedance	50 ohm

FI 212P085912




Low band	
Pass band frequency	698~960 MHz
Insertion loss at 698 ~ 960 MHz	0.70 dB max. (+25 deg.-C) 0.75 dB max. (-30~+85 deg.-C)
V.S.W.R. at 698 ~ 960 MHz	1.6 max.
Attenuation	19dB min. (1558-1570MHz) 20dB min. (1570-1580MHz) 19dB min. (1580-1610MHz)
Impedance	50 ohm
High band	
Pass band frequency 1	1558-1570MHz
Pass band frequency 2	1570-1580MHz
Pass band frequency 3	1580-1610MHz
Insertion loss at 1558 ~ 1570 MHz	0.75 dB max. (+25 deg.-C) 0.85 dB max. (-30~+85 deg.-C)
Insertion loss at 1570 ~ 1580 MHz	0.70 dB max. (+25 deg.-C) 0.80 dB max. (-30~+85 deg.-C)
Insertion loss at 1580 ~ 1610 MHz	0.70 dB max. (+25 deg.-C) 0.80 dB max. (-30~+85 deg.-C)
V.S.W.R. at 1558 ~ 1570 MHz	1.6 max.
V.S.W.R. at 1570 ~ 1580 MHz	1.6 max.
V.S.W.R. at 1580 ~ 1610 MHz	1.6 max.
Attenuation	35dB min. (698-824MHz) 42dB min. (824-894MHz) 25dB min. (894-960MHz)
Impedance	50 ohm

FI 168P157519



Low band	
Pass band frequency 0	824-960MHz
Pass band frequency 1	1558-1585MHz
Pass band frequency 2	1585-1610MHz
Insertion loss at 824 ~ 960 MHz	0.50 dB max. (+25 deg.-C) 0.60 dB max. (-40~+85 deg.-C)
Insertion loss at 1558 ~ 1585 MHz	0.40 dB max. (+25 deg.-C) 0.50 dB max. (-40~+85 deg.-C)
Insertion loss at 1585 ~ 1610 MHz	0.45 dB max. (+25 deg.-C) 0.55 dB max. (-40~+85 deg.-C)
V.S.W.R. at 824 ~ 960 MHz	2.0 max.
V.S.W.R. at 1558 ~ 1585 MHz	2.0 max.
V.S.W.R. at 1585 ~ 1610 MHz	2.0 max.
Attenuation	13dB min. (2400-2500MHz)
Impedance	50 ohm
High Band	
Pass band frequency	2400 ~ 2500 MHz
Insertion loss at 2400 ~ 2500 MHz	0.60 dB max. (+25 deg.-C) 0.70 dB max. (-40~+85 deg.-C)
V.S.W.R. at 2400 ~ 2500 MHz	2.0 max.
Attenuation	12dB min. (824-960MHz) 23dB min. (1558-1585MHz) 20dB min. (1585-1610MHz)
Impedance	50 ohm

FI 168T155021

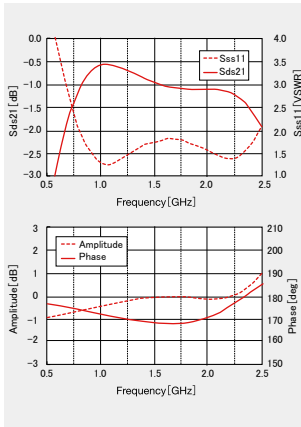

Pass band frequency	900-2200MHz
Insertion loss at pass band	2.0 dB max. (25 deg-C)
V.S.W.R. at pass band	2.3 dB max. (-30~+85 deg-C)
Phase balance at pass band	180 +/- 20 deg
Amplitude imbalance at pass band	+/- 2 dB max.
Impedance	50 : 75

MULTILAYER CERAMIC DEVICES (FILTERS / DIPLEXERS / BALUNS)


PACKAGING

① Minimum Quantity


Type	Embossed Tape [pcs]
325P	2000
212B	3000
212L	
212C	
212P	
168B	4000
168L	
168T	
168D	
168P	
105B	10000
105L	

② Tape Material


● Embossed Tape

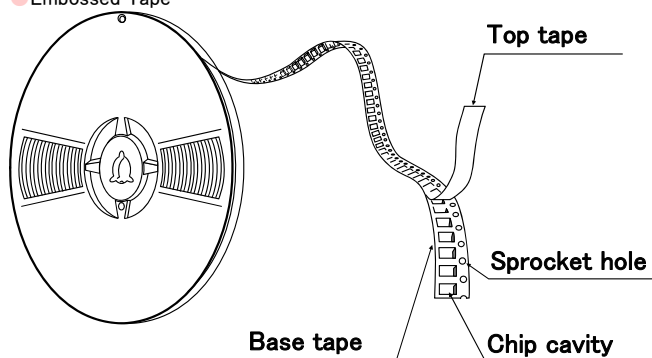

● Card Board Carrier Tape

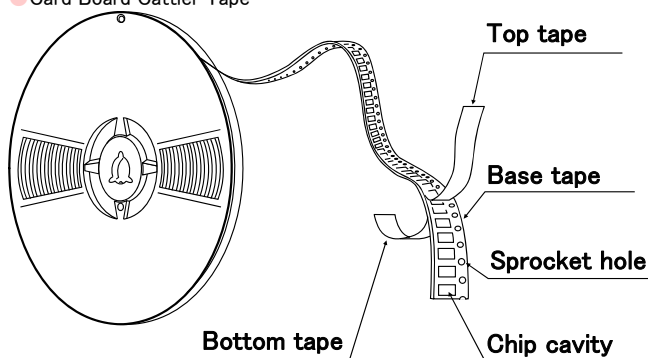

Chip Filled




● Taped package

Type (EIA)	Thickness mm (inch)	Standard Quantity [pcs]
325P	0.90 typ.(0.035)	2000
212B	0.90 typ.(0.035)	3000
212L	0.45 typ.(0.018)	
212C	0.90 typ.(0.035)	
212P	0.90 typ.(0.035)	
212C-0.5	0.45 typ.(0.018)	4000
212C-0.7	0.60 typ.(0.024)	
168B	0.45 typ.(0.018)	
168L	0.45 typ.(0.018)	
168T	0.45 typ.(0.018)	10000
168D	0.45 typ.(0.018)	
168P	0.60 typ.(0.024)	
105B	0.30 typ.(0.0118)	
105L	0.30 typ.(0.0118)	

③Taping Dimensions

● Embossed tape 0.315 inches wide

(325P Type, 212B Type, 212C Type, 212C-0.7 Type, 212P Type)

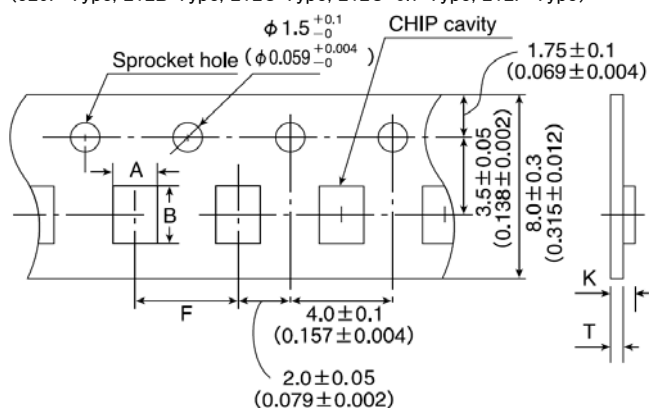


Unit: mm (inch)

Type (EIA)	Chip cavity		Insertion Pitch	Tape Thickness max.	
	A	B		K	T
325P	2.75 ± 0.2 (0.108 $\pm$ 0.008)	3.55 ± 0.2 (0.14 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	1.35 (0.053)	0.3 (0.012)
212B	1.55 ± 0.2 (0.061 $\pm$ 0.008)	2.3 ± 0.2 (0.091 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	1.6 (0.063)	0.3 (0.012)
212C	1.55 ± 0.2 (0.061 $\pm$ 0.008)	2.3 ± 0.2 (0.091 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	1.6 (0.063)	0.3 (0.012)
212C-0.7	1.55 ± 0.2 (0.061 $\pm$ 0.008)	2.3 ± 0.2 (0.091 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	1.3 (0.051)	0.3 (0.012)
212P	1.55 ± 0.2 (0.061 $\pm$ 0.008)	2.3 ± 0.2 (0.091 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	1.6 (0.063)	0.3 (0.012)

Unit: mm (inch)

● Paper tape 0.315 inches wide

(212L Type, 212C-0.5 Type, 168B Type, 168L Type, 168P Type, 168T Type, 168DType, 105B Type, 105L Type)

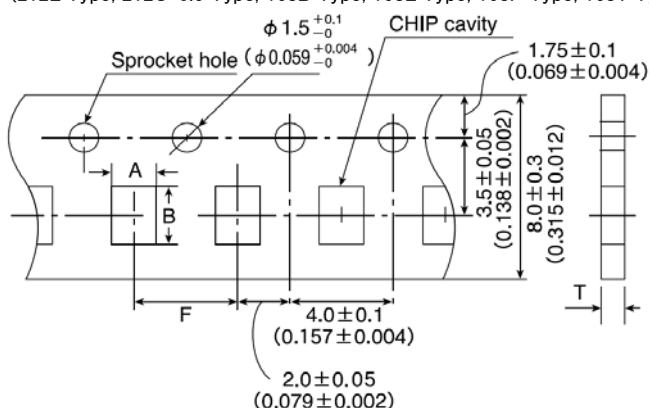


Unit: mm (inch)


Type (EIA)	Chip cavity		Insertion Pitch	Tape Thickness max.	
	A	B		T	
212L	1.55 ± 0.2 (0.061 $\pm$ 0.008)	2.3 ± 0.2 (0.091 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.65 (0.026)	
212C-0.5	1.55 ± 0.2 (0.061 $\pm$ 0.008)	2.3 ± 0.2 (0.091 $\pm$ 0.008)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.3 (0.012)	
168B	1.00 ± 0.05 (0.039 $\pm$ 0.002)	1.80 ± 0.05 (0.071 $\pm$ 0.002)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.55 (0.022)	
168L	1.00 ± 0.05 (0.039 $\pm$ 0.002)	1.80 ± 0.05 (0.071 $\pm$ 0.002)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.55 (0.022)	
168T	1.00 ± 0.05 (0.039 $\pm$ 0.002)	1.80 ± 0.05 (0.071 $\pm$ 0.002)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.55 (0.022)	
168D	1.00 ± 0.05 (0.039 $\pm$ 0.002)	1.80 ± 0.05 (0.071 $\pm$ 0.002)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.55 (0.022)	
168P	0.95 ± 0.05 (0.037 $\pm$ 0.002)	1.80 ± 0.05 (0.071 $\pm$ 0.002)	4.0 ± 0.1 (0.157 $\pm$ 0.004)	0.80 (0.031)	
105B	0.62 ± 0.03 (0.024 $\pm$ 0.001)	1.12 ± 0.03 (0.044 $\pm$ 0.001)	2.0 ± 0.05 (0.079 $\pm$ 0.002)	0.45 (0.018)	
105L	0.62 ± 0.03 (0.024 $\pm$ 0.001)	1.12 ± 0.03 (0.044 $\pm$ 0.001)	2.0 ± 0.05 (0.079 $\pm$ 0.002)	0.45 (0.018)	

Unit: mm (inch)

④Leader and Blank Portion

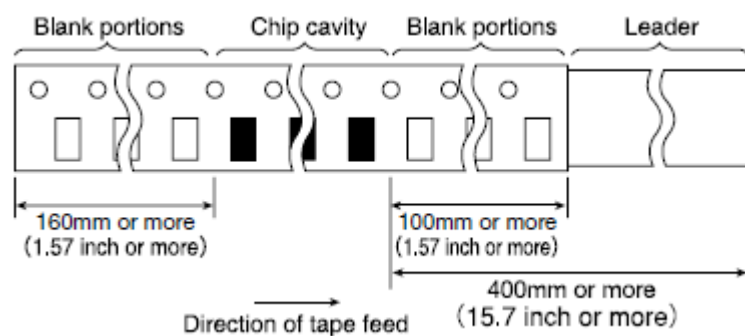

⑤Reel size

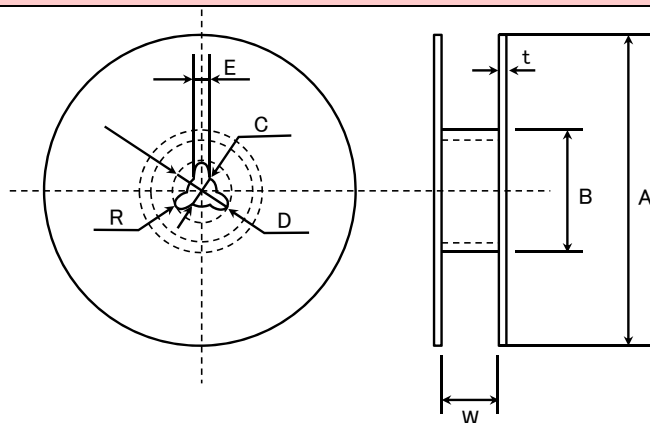


A	B	C	D	E	R
$\phi 178 \pm 2.0$ ($\phi 7.01 \pm 0.079$)	$\phi 50 \text{ min.}$ ($\phi 1.97 \text{ min.}$)	$\phi 13.0 \pm 0.2$ ($\phi 0.512 \pm 0.008$)	$\phi 21.0 \pm 0.8$ ($\phi 0.827 \pm 0.031$)	2.0 ± 0.5 (0.079 ± 0.020)	1.0
		t	W		
8mm width tape (0.315 inches width)		2.5max. (0.098max.)	10 ± 1.5 (0.394 ± 0.059)		
12mm width tape (0.472 inches width)		2.5max. (0.098max.)	14 ± 1.5 (0.551 ± 0.059)		

Unit: mm (inch)



⑥Top Tape Strength

The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.

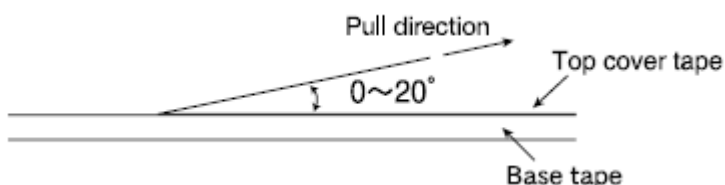

MULTILAYER CERAMIC DEVICES (FILTERS / DIPLEXERS / BALUNS)

RELIABILITY DATA

1. Operating Temperature Range	
Specified Value	-30~+85°C
2. Storage Temperature Range	
Specified Value	-30~+85°C
Test Methods and Remarks	※Note : -20 to +40°C in taped packaging
3. Resistance to Flexure of Substrate	
Specified Value	No mechanical damage.
Test Methods and Remarks	Warp : 2mm Testing board : Glass epoxy-resin substrate Thickness : 0.8mm 
4. Adhesion of Electrode	
Specified Value	Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality.
Test Methods and Remarks	Applied force : 5N Duration : 10 sec. 
5. Solderability	
Specified Value	75% or more of immersed surface of terminal electrode shall be covered with fresh solder.
Test Methods and Remarks	Solder temperature : 230±5°C Duration : 4±1 sec Preconditioning : Immersion into flux. Immersion and Removal speed : 25mm/sec.
6. Resistance to Solder Heat	
Specified Value	Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality.
Test Methods and Remarks	Preheating : 150°C for 2 min. Solder temperature : 260±5°C Duration : 5±0.5 sec. Preconditioning : Immersion into flux. Immersion and Removal speed : 25mm/sec. Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.

7. Thermal Shock			
Specified Value	Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality.		
Test Methods and Remarks	According to JIS C 0025.		
	Conditions for 1 cycle		
	Step	Temperature (°C)	Duration (min)
	1	−40±3	30±3
	2	Room Temperature	Within 3
	3	85±2	30±3
	4	Room Temperature	Within 3
	Number of cycles : 100		
Mounting method : Soldering onto PC board.			
Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.			

8. Humidity (steady state)	
Specified Value	Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality.
Test Methods and Remarks	Temperature : +40±2°C
	Humidity : 90~95%RH
	Duration : 96hrs
	Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.

9. High temperature life test	
Specified Value	Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality.
Test Methods and Remarks	Temperature : +85±2°C
	Duration : 96hrs
	Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.

10. Low temperature life test	
Specified Value	Characteristics : shall satisfy the electrical characteristics. Appearance : No significant abnormality.
Test Methods and Remarks	Temperature : -40±2°C
	Duration : 96hrs
	Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.

Note on standard condition:

“standard condition” referred to herein is defined as follows :
 5 to 35°C of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.

When there are questions concerning measurement result :

In order to provide correlation data, the test shall be conducted under condition of 20±2°C of temperature, 60 to 70% relative humidity and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the “standard condition”.












MULTILAYER CERAMIC DEVICES (FILTERS / DIPLEXERS / BALUNS)

PRECAUTIONS

1. PCB Design

◆Land pattern design
Land pattern dimension examples



Technical considerations

FI325P Type  Unit: mm	FI212B Type  Unit: mm	FI212B245025 FI212B190223  Unit: mm	FI212L Type  Unit: mm
FI168T/D Type  Unit: mm	FI168B/L Type  Unit: mm	FI168P Type  Unit: mm	FI212C Type  Unit: mm
FI212P Type  Unit: mm	FI212 P3960A4  Unit: mm	FI105B/L Type  Unit: mm	

2. Soldering

◆Conditions for Reflow soldering (for reference)
【Reflow Profile】

Technical considerations

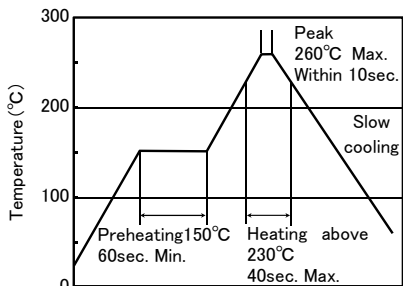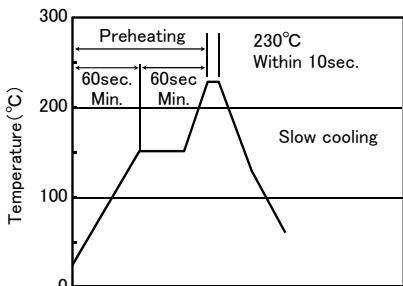

※ Components should be preheated to within 100 to 130°C from soldering temperature.
※ Assured to be reflow soldering for 2 times.
Note : The above profiles are the maximum allowable soldering condition, therefore these profiles are not always recommended.

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) .

3. Storage conditions	
Precautions	◆Storage 1. To maintain the solderability of terminal electrodes and to keep the packaging material in good condition, care must be taken to control temperature and humidity in the storage area. Humidity should especially be kept as low as possible. - Recommended conditions Ambient temperature : $-20\sim+40^{\circ}\text{C}$ Humidity : Below 70%RH The ambient temperature must be kept below 30°C. Even under ideal storage conditions, the solderability of electrodes decreases gradually, so filters should be mounted within 6 months from the time of delivery. - The packaging material should be kept where no chlorine or sulfur exists in the air.
Technical considerations	◆Storage 1. If the parts are stocked in a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/ packaging materials may take place. For this reason, components should be used within 6 months from the time of delivery. If exceeding the above period, please check the solderability before using the filter.
■ Please contact of our offices for further details of specifications. All of the standard values listed here are subject to change without notice. Therefore, please check the specifications carefully before use.	