


PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH +/- .3" [7]
MLT4EH15-LP316	4" [102]	50	17.1" [434]
MLT6EH15-LP316	6" [152]	50	23.4" [594]
MLT8EH15-LP316	8" [203]	50	29.7" [754]
MLT10EH15-LP316	10" [254]	50	35.9" [912]
MLT12EH15-0316	12" [305]	25	42.2" [1072]

Ⓑ

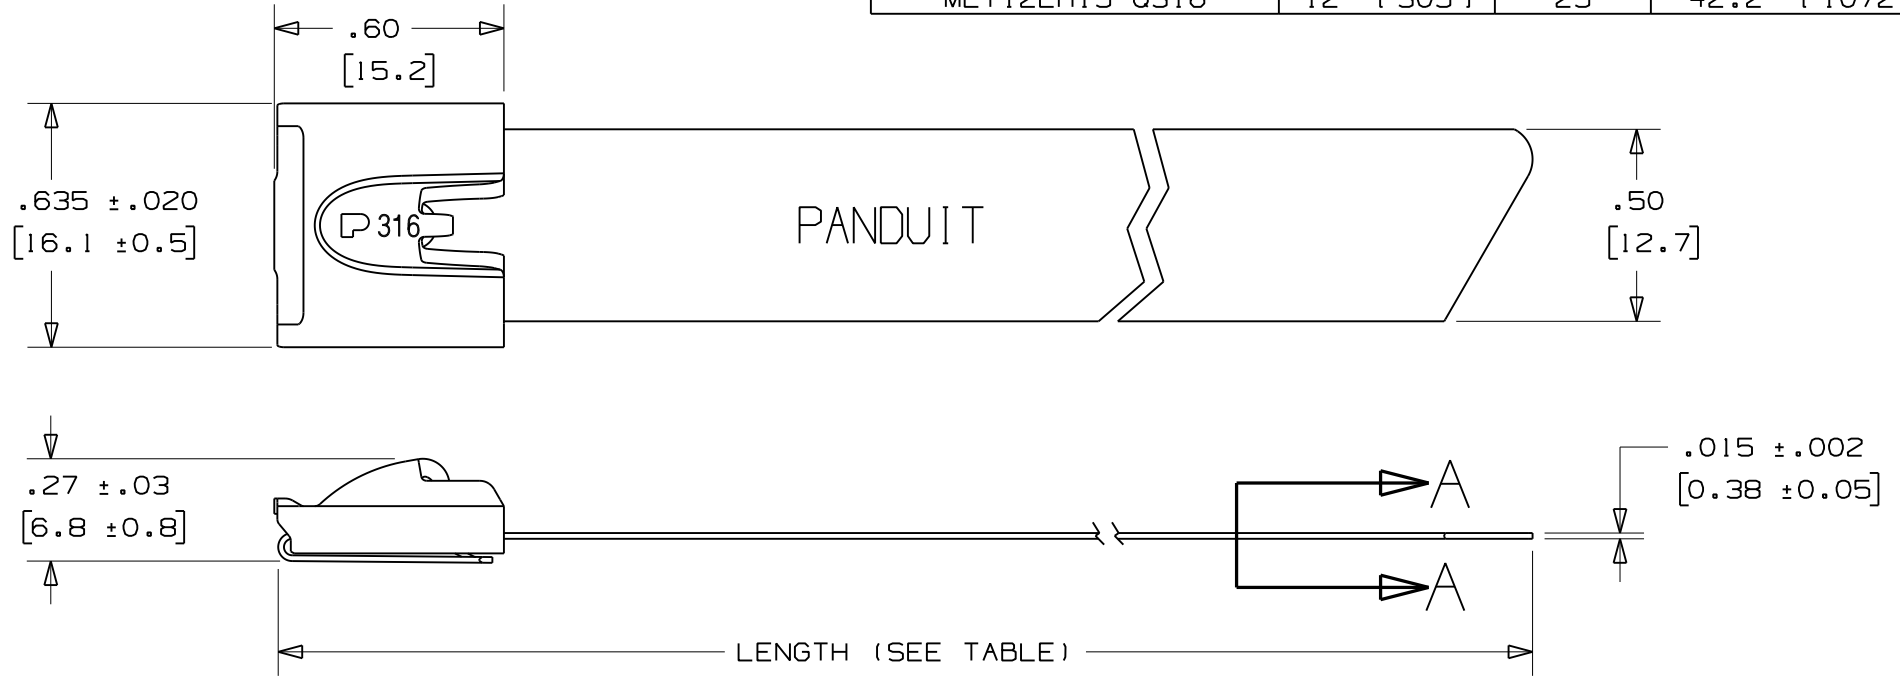

NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 700 LBS. (3115 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

Ⓐ

BROKEN EDGES
TO ELIMINATE SHARPNESSSECTION A - A
SCALE: 4x

N41158BS_DC/02A

02A	10/08	JAMB	SKB	ORIG FILE SPEC WAS S41158_02. NOTE 1: APPLICATION TOOL RT1HT REPLACED BY RT2HT			 CORP. TINLEY PARK, ILLINOIS		
02	5/06	JAMB	SKB	Ⓑ	ADDED PARTS MLT10EH15-LP316 & MLT12EH15-0316 TO TABLE.		SS00179	---	---
01	8/04	JAMB	DPN	Ⓐ	REMOVED "AISI NO.5"		11907	CCH	JJB
00	1/04	JAMB	DPN	RELEASED			11307	CCH	JJB
REV	DATE	BY	CHK	DESCRIPTION			ECN #	PM	CUST
							DRAWN BY	CHK'D	SCALE
							JAMB	DPN	2x
							DRAWING NO. N41158BS_DC		

METAL LOCKING TIE EXTRA HEAVY DUTY
316 STAINLESS STEEL
CUSTOMER DRAWING