

## FEATURES

- Carbon resistive element
- IP54 protection according to IEC 60529
- Polyester substrate
- Also upon request:
  - Wiper positioned at 50% or fully clockwise.
  - Supplied in magazines for automatic insertion.
  - Long life model for low cost control potentiometer applications
  - Self extinguishable plastic UL 94V-0
  - Cut track option
  - Special tapers
  - Mechanical detents
  - Low torque version
  - Special switch option
  - 3% Linearity and 100K cycles mechanical life

## ELECTRICAL SPECIFICATIONS

- Mechanical rotation angle:  $235^{\circ} \pm 5^{\circ}$
- Electrical rotation angle:  $220^{\circ} \pm 20^{\circ}$
- Torque: 0.4 to 2 Ncm.  
(0.6 to 2.7 in-oz)
- Stop torque: > 5 Ncm. (>7 in-oz)
- Life(\*): Up to 10K cycles

- Range of values (\*)  
 $100\Omega \leq R_n \leq 5\text{ M}$  (Decad. 1.0 - 2.0 - 2.2 - 2.5 - 4.7 - 5.0)
- Tolerance (\*):  $100\Omega \leq R_n \leq 1\text{ M}\Omega$  -----  $\pm 20\%$   
 $1\text{ M}\Omega < R_n \leq 5\text{ M}\Omega$  -----  $\pm 30\%$
- Max. Voltage: 200 VDC (lin) 100 VDC (no lin)
- Nominal Power 50°C (122°F) (see power rating curve)  
0.15 W (lin) 0.07 W (no lin)  
 $\geq$
- Taper (\*) (Log. & Alog. only  $R_n \geq 1\text{ K}$ ) Lin ; Log; Alog.
- Residual resistance(\*):  $\leq 0.5\%$   $R_n$  (5  $\Omega$  min.)
- Equivalent Noise Resistance:  $\leq 3\%$   $R_n$  (3  $\Omega$  min.)
- Operating temperature(\*\*): -25°C + 70°C (-13°F + 158°F)

(\*\*) Up to 85°C depending on application

## HOW TO ORDER

| OPTIONAL EXTRAS                                                |                                                         |      |                 |                                                                              |                                              |                                                    |                                                                  |                                                                                                                                          |                                                |  |  |  |   |
|----------------------------------------------------------------|---------------------------------------------------------|------|-----------------|------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--|--|--|---|
| PT 10                                                          | L                                                       | H01  | 101             | A                                                                            | 2020                                         |                                                    |                                                                  |                                                                                                                                          |                                                |  |  |  | S |
| Series                                                         | Code                                                    |      | Mounting Method | Taper                                                                        | Life                                         | Detents                                            | Shaft/Thum.                                                      | Shaft/rotor colour                                                                                                                       | Torque                                         |  |  |  |   |
| PT-10                                                          | H01                                                     | H2.5 |                 | A = Lin.<br>B = Log.<br>C = Alog.                                            | E = Long life<br>(See note 5)                | PAI<br>PAM<br>PAF<br>P11<br>P1F<br>P02<br>⋮<br>P16 | 01 = Fig. 1<br>02 = Fig. 2<br>⋮<br>17 = Fig. 17<br>(See note 10) | RO = Red<br>NE = Black<br>VE = Green<br>AM = Yellow<br>AZ = Blue<br>MA = Brown<br>GR = Grey<br>NA = Orange<br>CR = Cream<br>(See note 8) | - = Standard<br>L = Low Torque<br>(See note 9) |  |  |  |   |
| Rotors                                                         |                                                         |      |                 | Value                                                                        | Tolerance                                    |                                                    |                                                                  |                                                                                                                                          |                                                |  |  |  |   |
| B<br>G<br>K<br>L<br>M<br>R<br>W<br>X<br>Y<br>Z<br>(See note 1) | (See note 2 / SMD version available: see product PS-10) |      |                 | 101 = 100Ω<br>⋮<br>504 = 500 K<br>⋮<br>505 = 5 M<br>000 = CM<br>(See note 3) | 2020 = ± 20%<br>3030 = ± 30%<br>(See note 4) |                                                    |                                                                  |                                                                                                                                          |                                                |  |  |  |   |
|                                                                |                                                         |      |                 |                                                                              |                                              | Cut track                                          | Magazine                                                         | Flammability                                                                                                                             | Wiper position                                 |  |  |  |   |
|                                                                |                                                         |      |                 |                                                                              |                                              | PCI = Initial<br>PCF = Final                       | T<br>(See note 6)                                                | I = Non flammable<br>(See note 7)                                                                                                        | PM = 50%<br>PF = Final                         |  |  |  |   |

- (1) "Z" adjustment only available on "H" versions. Rotor "G" only available in purple (shaft/rotor colour "VI").
- (2) Terminals styles: "P" & "J" are crimped. V=Vertical adjust; H=Horizontal Adjust
- (3)

Value    Example: Code:

10

1

100 Ω

→

Numb of zeros

000 = CM = Switch version (contact us)

→

First two digits of the value.
- (4) Non standard tolerance, upon request. Example: +7%      Code: 07      05 → negative tolerance  
                                                                             -5%          → positive tolerance
- (5) • Standard = 500 cycles    • Long = 10K cycles  
Others upon request.
- (6) Magazines: not available with the H10, V05 and V13 models, nor with adjustment types X, W, Y, Z.
- (7) Non flammable: housing, rotor and shaft. According to UL 94V-0
- (8) Colour shaft/rotor:
  - Potentiometer without shaft: only rotor
  - Potentiometer with shaft: only shaft
  - Cream colour only available in standard plastic.

(9) Low Torque:  $\leq 1 \text{ Ncm}$   
*No detent option available for low torque models.*

(10) If you wish to use your own custom plastic shaft/knob/actuator please contact Piher for advice about compatible materials.

NOTE: The information contained here should be used for reference purposes only.

## HOW TO ORDER CUSTOM DRAWING

PT-10 LH 01 + DRAWING NUMBER (Max. 16 characters)


This way of ordering should be used for options which are not included in the "How to order" standard and optional extras.

## STANDARD OPTIONS

|                |       |            |
|----------------|-------|------------|
| Cut track      | ----- | No         |
| Detents        | ----- | None       |
| Packing        | ----- | Bulk       |
| Non flammable  | ----- | No         |
| Rotor colour   | ----- | White      |
| Shaft colour   | ----- | Natural    |
| Wiper position | ----- | Initial    |
| Torque         | ----- | Standard   |
| Life           | ----- | 500 cycles |


## ROTORS

### Without shaft

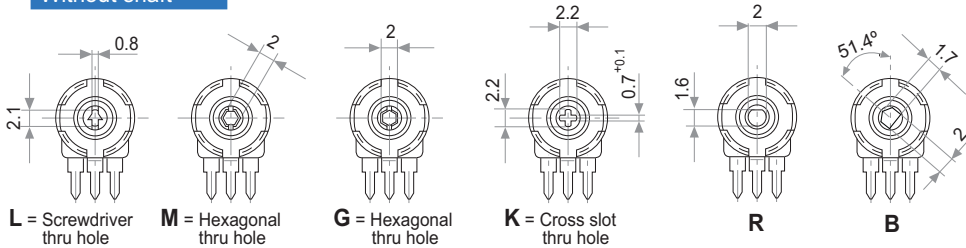


Wipers positioned at 50%

### With shaft

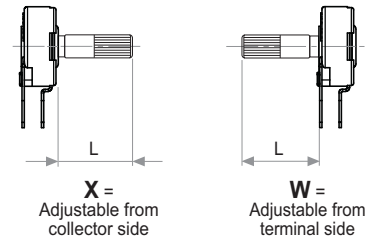


### With thumbwheel



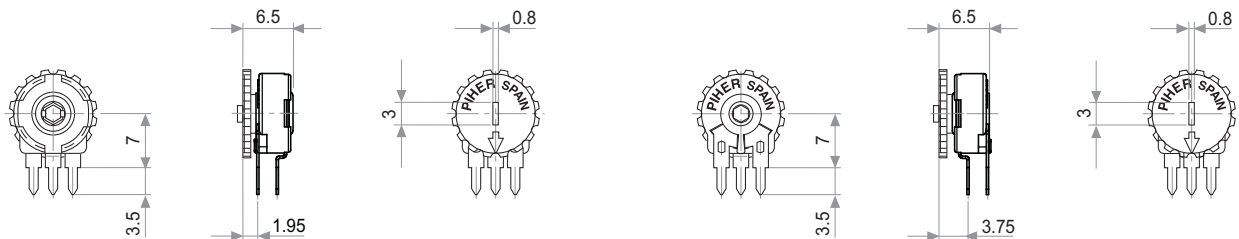


## MOUNTING METHODS

**v** = horizontal mount – vertical adjust

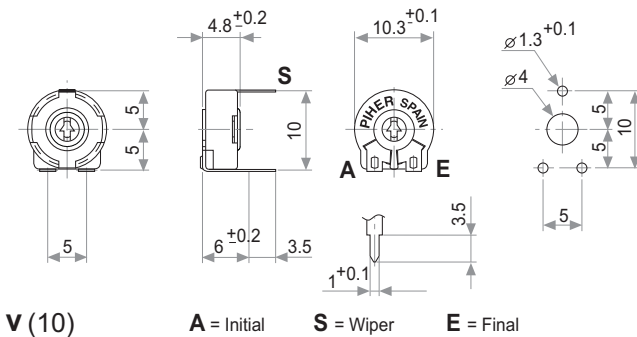


**h** = vertical mount – horizontal adjust

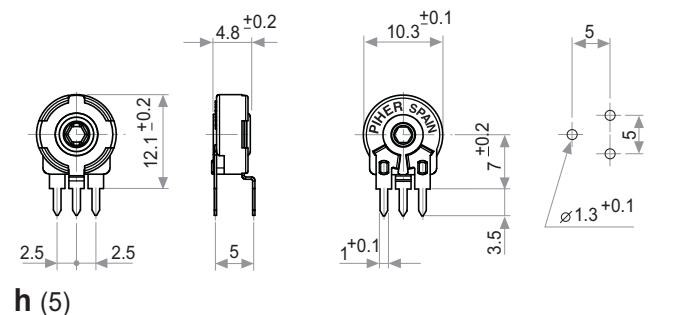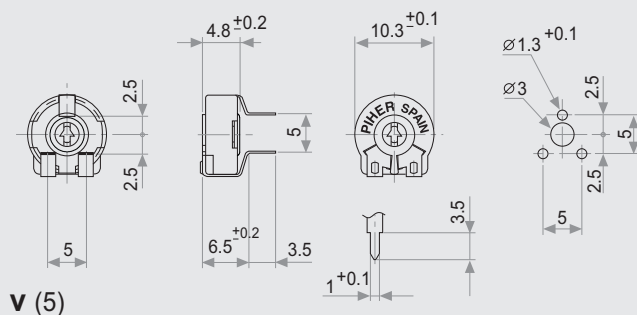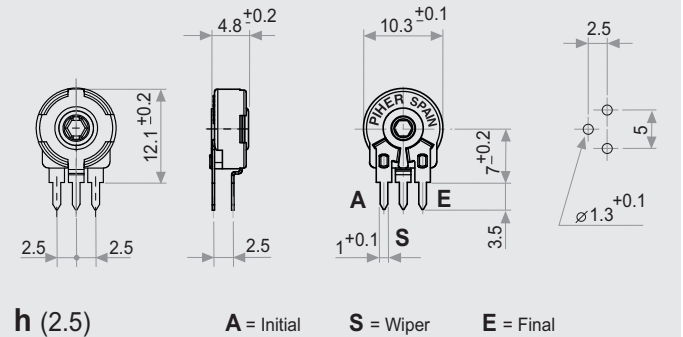


NOTE = Please note relative terminal positions when ordering non linear tapers.

### Crimped terminals


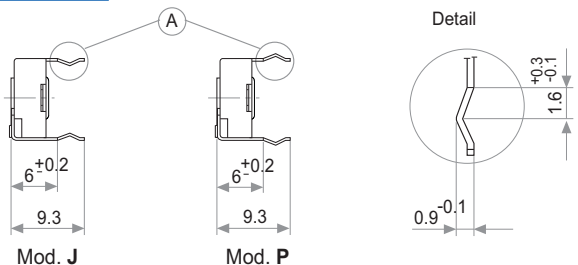


## OPTIONS


Positioning (Std. Position = CCW)



CUT TRACK  
CCW on-off (A)



CW on-off (E)




S = Wiper


## TAPERS

Standard

A = Linear  
B = Log.  
C = Alog.



Special taper example

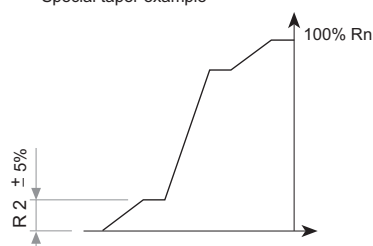

NOTE = Please note relative terminal positions when ordering non linear tapers.

## TESTS

## TYPICAL VARIATIONS



|                                  |                           |                       |
|----------------------------------|---------------------------|-----------------------|
| ELECTRICAL LIFE                  | 1.000 h. @ 50°C; 0.15 W   | ±5 %                  |
| MECHANICAL LIFE (CYCLES)         | 500 @ 10 CPM ... 15 CPM   | ±3 % (Rn < 1 MΩ)      |
| TEMPERATURE COEFFICIENT          | -25°C; +70°C              | ±300 ppm (Rn < 100 K) |
| THERMAL CYCLING                  | 16 h. @ 85°C; 2h. @ -25°C | ±2.5 %                |
| DAMP HEAT                        | 500 h. @ 40°C @ 95% HR    | ±5 %                  |
| VIBRATION (for each plane X,Y,Z) | 2 h. @ 10 Hz. ... 55 Hz.  | ±2 %                  |

NOTE: Out of range values may not comply these results.

## PACKAGING

### BOXES

| Model           | Units                    |
|-----------------|--------------------------|
| Without shaft   | 1000 (80 x 85 x 185 mm.) |
| With thumbwheel | 800 (80 x 85 x 185 mm.)  |
| With shaft      | 400 (80 x 85 x 185 mm.)  |





Magazines for PT-10 h 2.5; h 5

Also crimped term. h 2.5 P

### AUTOMATIC INSERTION

| Magazines       | Units per magazine |
|-----------------|--------------------|
| PT-10H & PT-10V | 50 Pieces          |




Magazines for PT-10 V


Also crimped term. VP

## RECOMMENDED CONNECTION

Recommended  
connection scheme  
for Piher's position  
sensors  
(voltage divider)



## POWER RATING CURVE

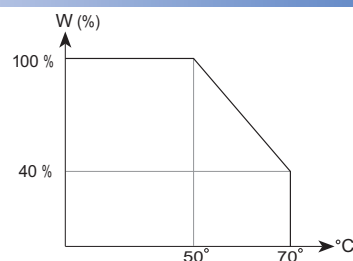

## SHAFTS (for G and M rotor types, top view)

Shafts, knobs & thumbwheels are delivered at random position. Positioning available upon request.




Fig. 1 / Ref. 5016




Fig. 2 / Ref. 5053

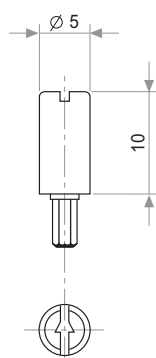


Fig. 3 / Ref. 5012




Fig. 4 / Ref. 6053

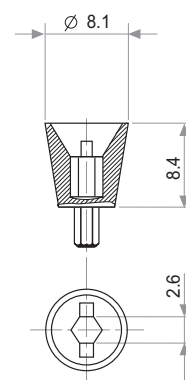


Fig. 6 / Ref. 5035

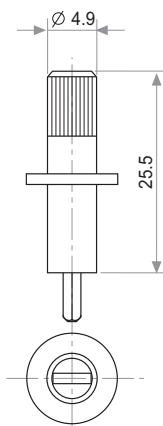


Fig. 7 / Ref. 5115

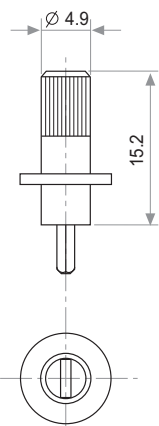


Fig. 8 / Ref. 5116

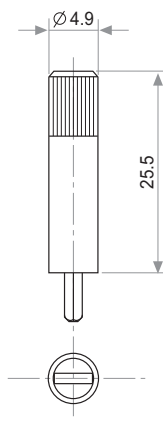


Fig. 9 / Ref. 5119

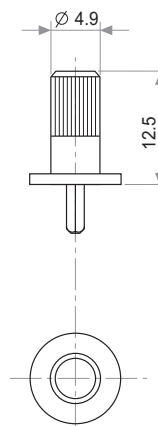


Fig. 10 / Ref. 5120

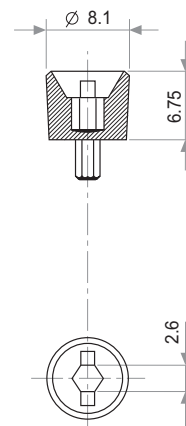


Fig. 11 / Ref. 5027

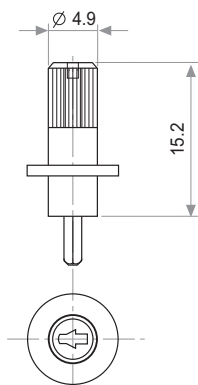


Fig. 12 / Ref. 6052




Fig. 13 / Ref. 5121





Fig. 14 / Ref. 5055

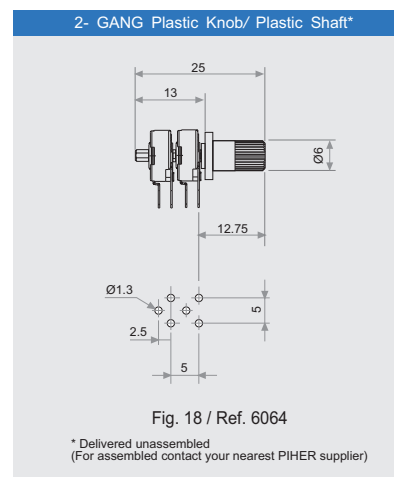

## THUMBWHEELS (for G and M rotor types, top view)

Shafts, knobs & thumbwheels are delivered at random position. Positioning available upon request.




Fig. 5 / Ref. 5034




Fig. 15 / Ref. 6008




Fig. 16 / Ref. 5039





Fig. 17 / Ref. 5062



Upon request

## THUMBWHEEL

For R rotor type only

Marking: configurable number of positions.

Example of four positions marking:

## DETENT CONFIGURATIONS EXAMPLES

This innovative PT's with detents family has been specifically developed to allow the integration of otherwise large and expensive external mechanisms into the body of the majority of the 10 & 15 mm. PS/PT/PTC potentiometer series thus allowing a high range of configurations: special tapers, torque, tolerances, linearity, cut track, etc.


This detent design not only adds a "click" sensation of position, but also offers enormous savings in both cost and space for any given application.

Strong and weak detents can be mixed as per customer's request.


Detent number and positions can be made or fitted to the customer needs or preferences.

- Relative detent positions along the total mechanical travel. Unless otherwise specified the detents are evenly spaced (using the end points as reference)


\*For more than 10 detents versions please contact your nearest PIHER distributor. Mechanical and/or electrical features may be affected by detents. Please see our separate PTs with detents datasheet at [www.piher.net](http://www.piher.net)

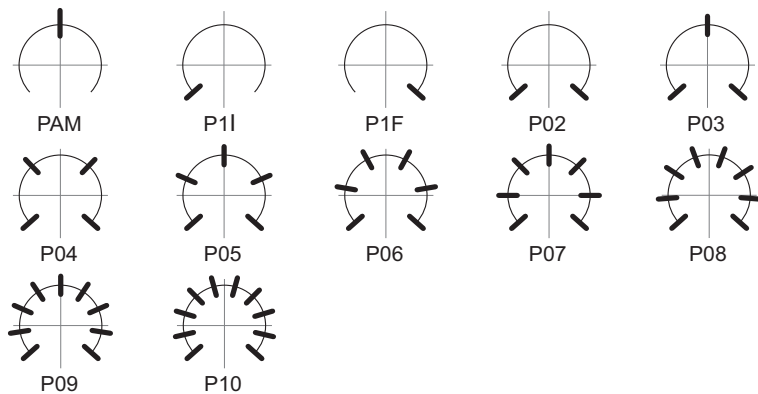


A = 26°  
B = 27.5°

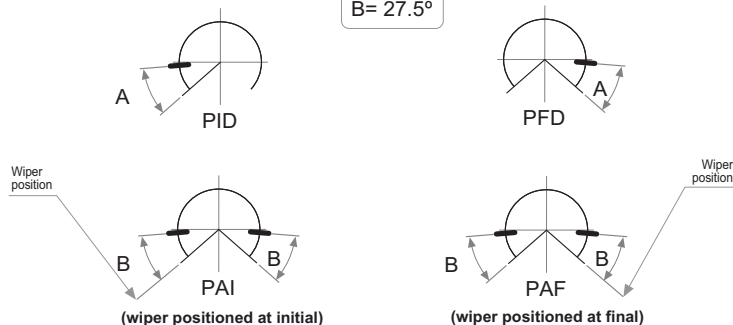


## DETENT DETAILS

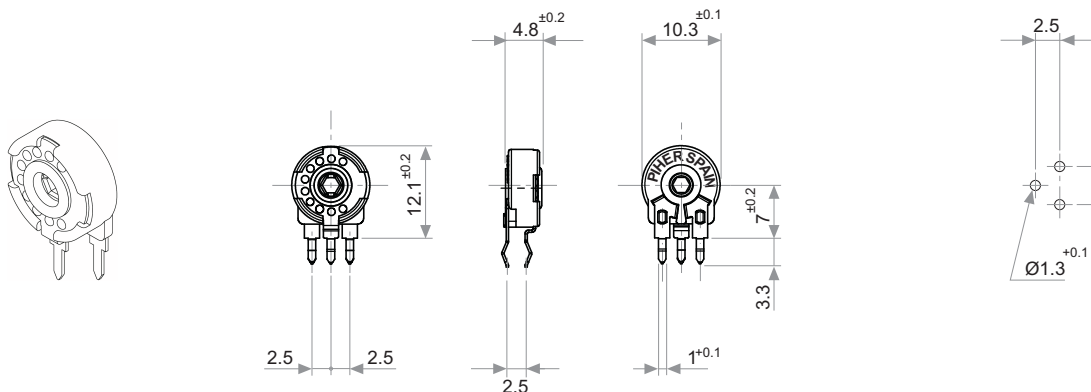



## STANDARD SWITCH VERSIONS

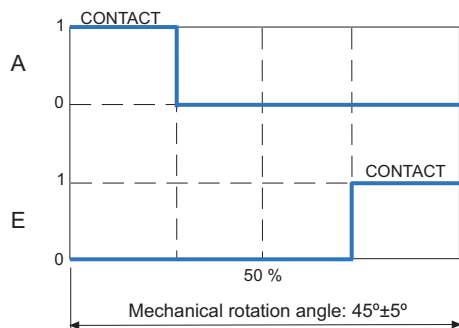

D48 Switch code (Housing colour: green)

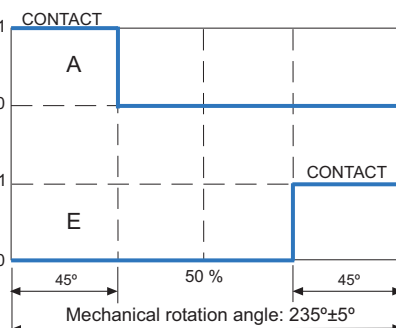

A80 Switch code




### SW Standard specs.

Power Rating:  
24V / 15mA  
ON position resistance:  
≤ 5 Ω  
Insulation Resistance:  
≥ 30 MΩ

Please contact Piher for ordering information.

(Rotor at Final Position)



PIHER's potentiometers may feature special stepped outputs or 'constant voltage zones' for the 10mm and 15mm product families.


These constant voltage zones can be combined with PIHER's mechanical detents to provide exact alignment between the electrical output (flat areas) and the mechanical detent's positions. The result is a higher level of precision in controlling lighting, temperature, motor or other electronic control systems.

In addition to established catalogue detent configurations, we will design and manufacture any other configuration on our tried-and-tested carbon/cermet & THM/SMD potentiometer technology and processes.


With its exacting control capabilities, our 10mm and 15mm potentiometers series are well suited for many consumer applications such as ovens, ranges, dishwashers, lighting (dimmers), power hand tools, washing machines and HVAC systems.

**Constant value zones can be combined with strategically located stops matching the flat areas of the output.**

**10 stepped outputs version example:**

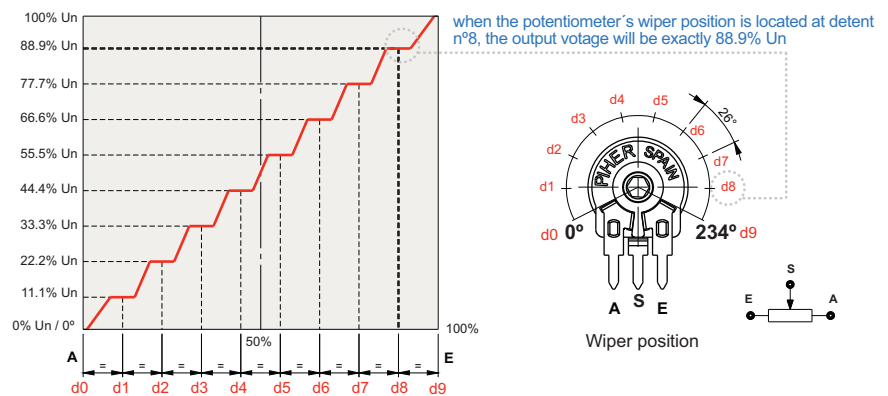

### Improved repeatability



By combining the constant value zones with the detents, engineers can align the same voltage values with each of the detent stops when rotating the control both forward and backward.

This provides clear mechanical positions that are not only repeatable, but perfectly aligned electrical outputs at each of the (detent) angles.

Piher's detents also prevent output values from changing due to vibration or accidental rotor movements, furthering reliable control consistency.

### Design tip. Cost-effectiveness

Absolute encoders can easily be replaced connecting the potentiometer to the microprocessor's analogue input.



### Main advantages

- ✓ Unique, non-overlapping values at each stop (detent position)
- ✓ Prevents output value change due to light vibration or accidental rotor micro-movements
- ✓ Fully customisable according to customer's needs
- ✓ Cost effective replacement for absolute encoders

### Disclaimer

The product information in this catalogue is for reference purposes. Please consult for the most up to date and accurate design information.

Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.

Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.

No licence, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorised Piher personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher International Corp. Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

