



SAW Components

Data Sheet B4149

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components	B4149
Low-Loss Filter for Mobile Communication	1842,5 MHz
Data Sheet	SMD


Ceramic package **DCC6D**

Features

- Low-loss RF filter for mobile telephone PCN systems, receive path
- Low amplitude ripple
- Usable passband 75 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50Ω to 200Ω
- Package for **Surface Mounted Technology (SMT)**
- Ceramic SMD package

Terminals


- Ni, gold-plated

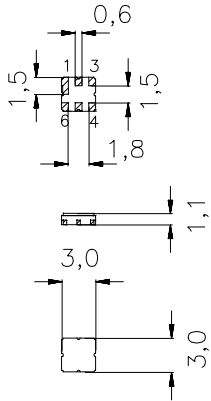

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input, unbalanced
4, 6	Output, balanced
1, 3	Input ground
1, 3, 5	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4149	B39182-B4149-U510	C61157-A7-A68	F61074-V8089-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 20 / + 75	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
Input power max.	P_{IN}			source/load impedance 50Ω/200Ω
1710,0 ... 1785,0 MHz		5	dBm	peak power of GSM signal duty cycle 1:8
elsewhere		0	dBm	



SAW Components	B4149
Low-Loss Filter for Mobile Communication	1842,5 MHz

Data Sheet



Characteristics

Operating Temperature Range:	$T = +25 \pm 2 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 200\Omega \parallel 22 \text{ nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}				
1805,0 ... 1880,0 MHz		—	2,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1805,0 ... 1880,0 MHz		—	0,9	2,0	dB
Attenuation	α				
0,0 ... 1000,0 MHz		40	50	—	dB
1000,0 ... 1550,0 MHz		30	40	—	dB
1550,0 ... 1705,0 MHz		25	28	—	dB
1705,0 ... 1785,0 MHz		12	18	—	dB
1920,0 ... 1980,0 MHz		12	17	—	dB
1980,0 ... 2010,0 MHz		18	22	—	dB
2010,0 ... 2500,0 MHz		20	26	—	dB
2500,0 ... 3840,0 MHz		25	35	—	dB
3840,0 ... 6000,0 MHz		20	32	—	dB



SAW Components

B4149

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating Temperature Range:

$T = -20$ to $+75^{\circ}\text{C}$

Terminating source impedance:

$Z_S = 50\Omega$ (unbalanced)

Terminating load impedance:

$Z_L = 200\Omega$ (balanced) || 22 nH

			min.	typ.	max.	
Center frequency	f_C		—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}					
	1805,0 ... 1880,0 MHz		—	2,5	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0 MHz		—	1,4	2,5	dB
Attenuation	α					
	0,0 ... 1000,0 MHz		40	50	—	dB
	1000,0 ... 1550,0 MHz		30	40	—	dB
	1550,0 ... 1705,0 MHz		25	28	—	dB
	1705,0 ... 1785,0 MHz		10	15	—	dB
	1920,0 ... 1980,0 MHz		10	17	—	dB
	1980,0 ... 2010,0 MHz		18	22	—	dB
	2010,0 ... 2500,0 MHz		20	26	—	dB
	2500,0 ... 3840,0 MHz		25	35	—	dB
	3840,0 ... 6000,0 MHz		20	32	—	dB



SAW Components

B4149


Low-Loss Filter for Mobile Communication

1842,5 MHz


Data Sheet



Transfer function

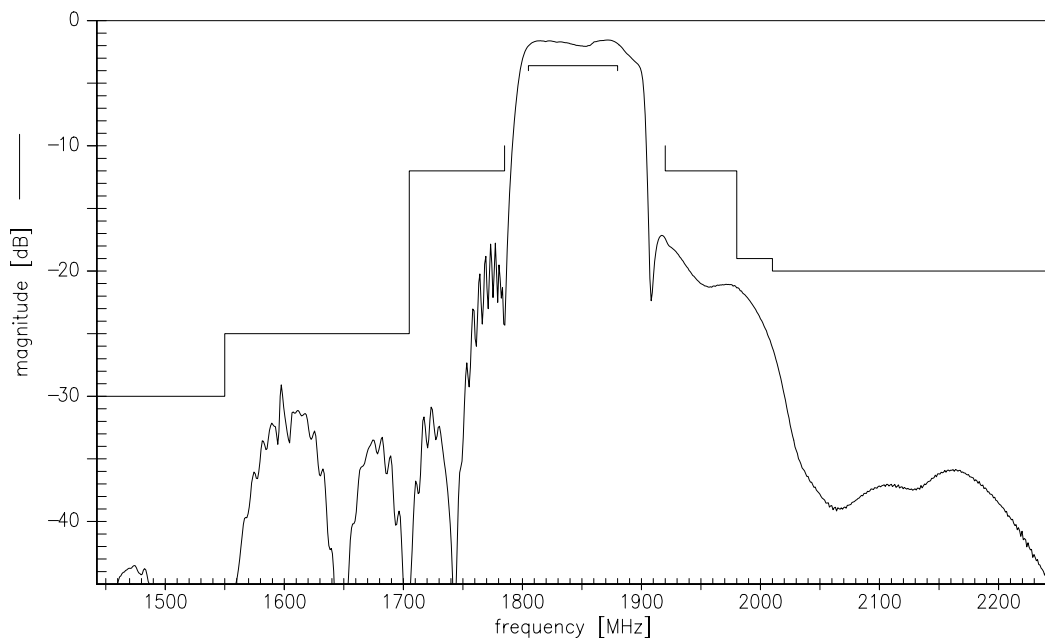

Transfer function (wide band)

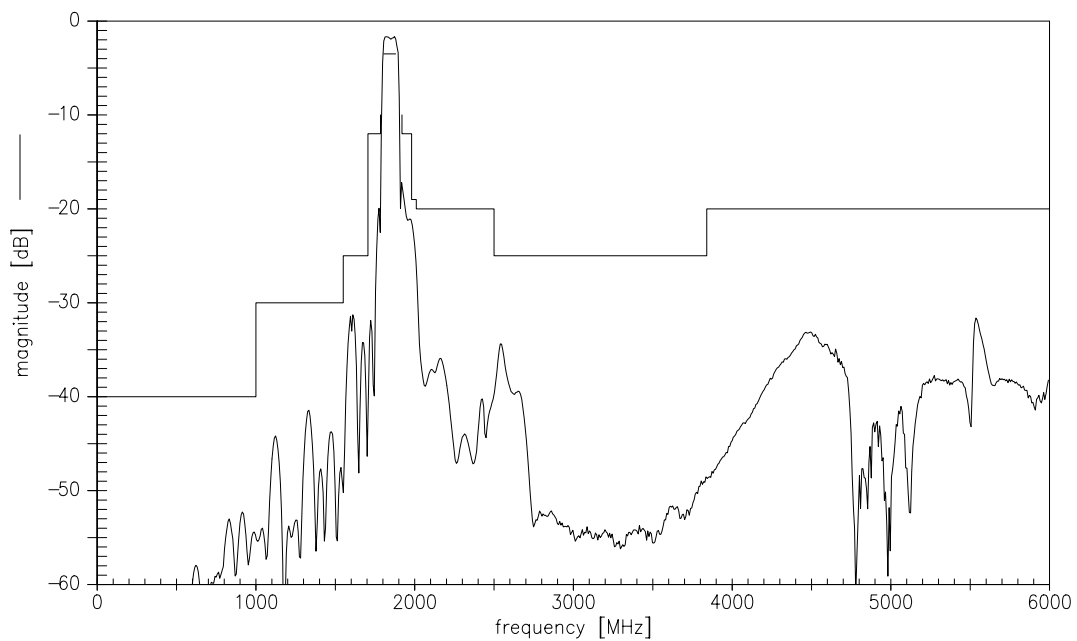



SAW Components	B4149
Low-Loss Filter for Mobile Communication	1842,5 MHz
Data Sheet	SMD

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E MF
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.