


STEP-Z Interconnection System (Continued)

12.00 [.472] Plugs

STEP-Z
Interconnection System

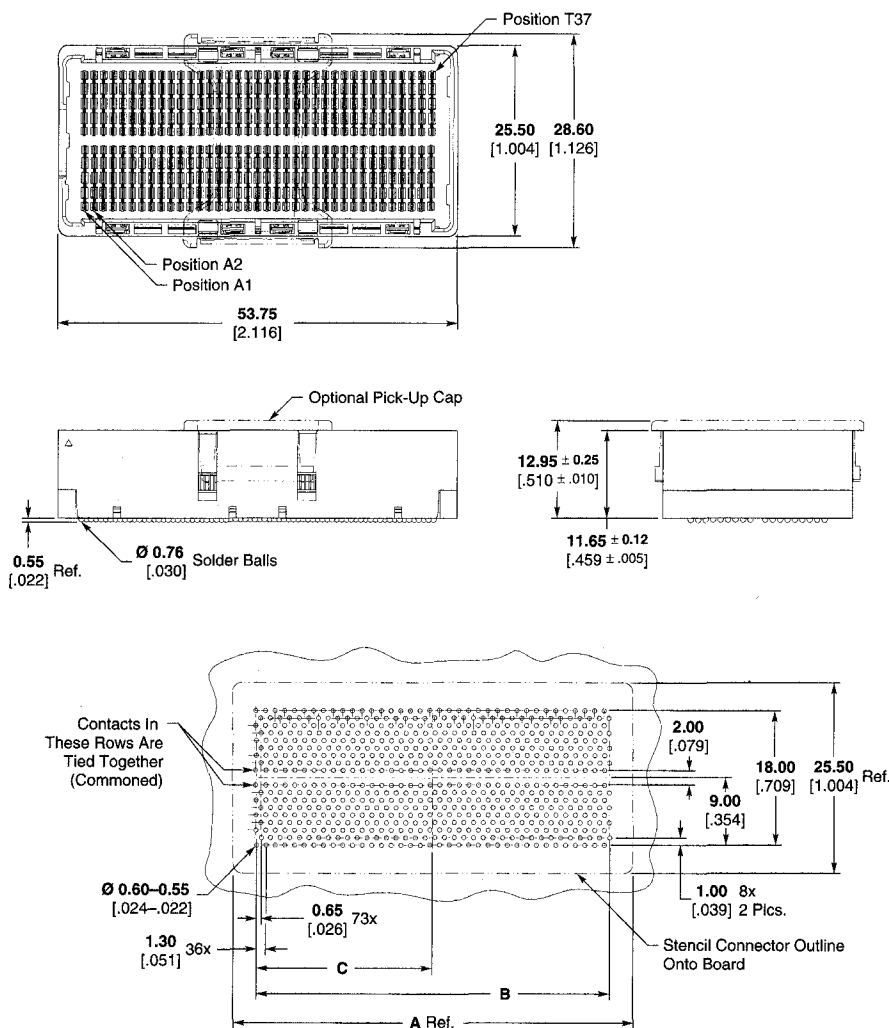

Recommended PC Board Layout

No. of Pos.*	Dimensions			Part Numbers With Pick & Place Cap
	A	B	C	
104	22.60 .890	16.25 .640	8.13 .320	1-1761612-2
200	38.20 1.504	31.85 1.254	15.93 .627	1-1761614-2
296	53.75 2.116	47.45 1.868	23.73 .934	1-1761616-2

* Signal contacts only, ground contacts not included.
Tray packaged Part Numbers shown. Contact Tyco Electronics Engineering for Tape and Reel packaged versions.