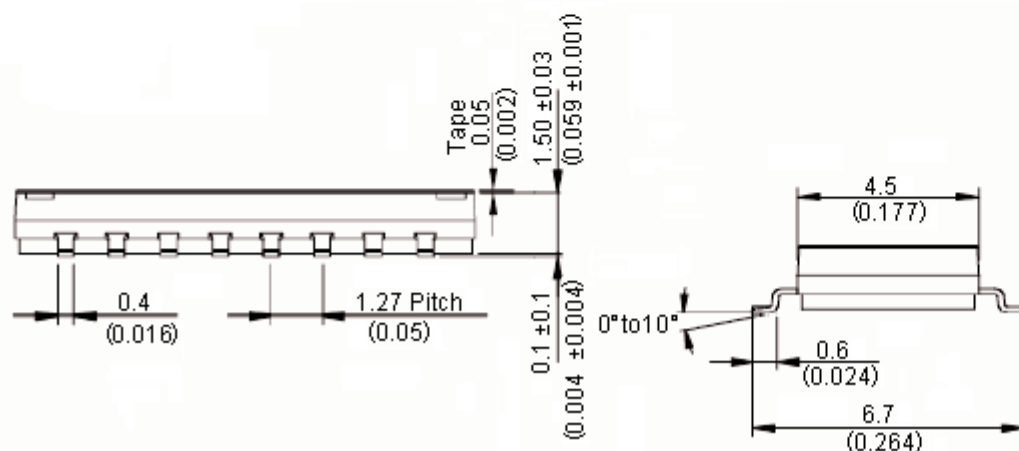
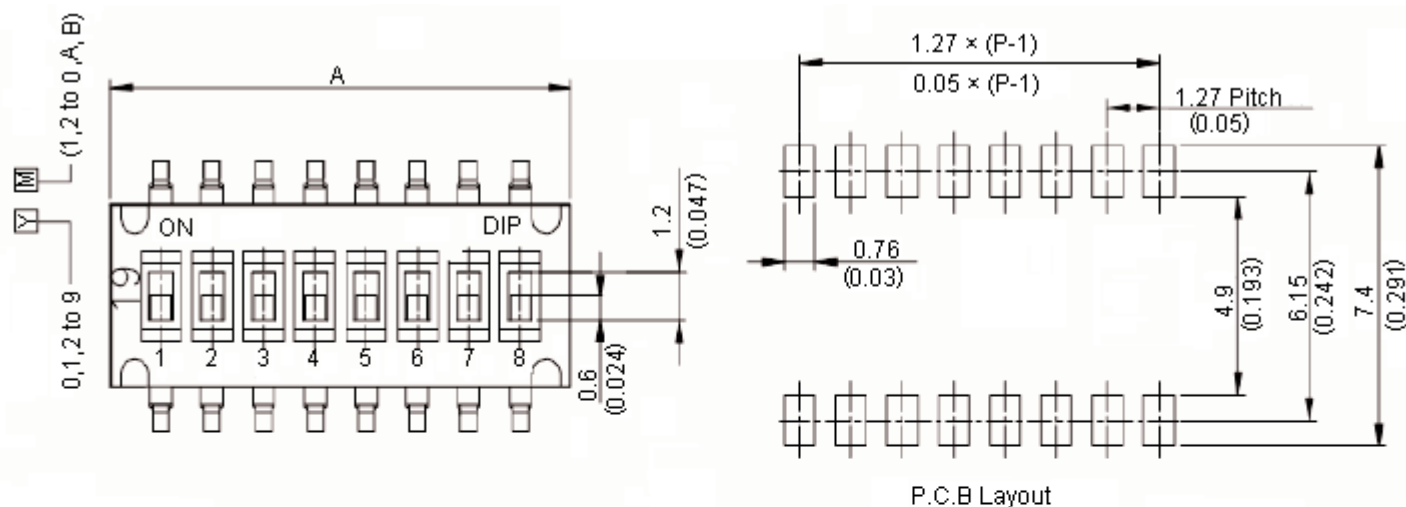


Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

SN

CHECKED BY:

JAG

APPROVED BY:

DATE:

14/01/12

DATE:

14/01/12

DATE:

28/01/12

DRAWING TITLE:

Jack Screws - Screw Lock Accessories

SIZE
A

DWG NO.

M10002506

ELECTRONIC FILE
(F)NHDS-V_1_DWG

REV
A

SCALE: NTS

U.O.M.: mm (Inches)

SHEET: 1 OF 2



PART NO.

DIL Switch - MCDHN Series

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	SN	02/01/12	Jagan	16/01/12		16/01/12

Specifications:

Mechanical Life	Operation Force	Stroke	Operation Temperature	Storage Temperature
1,000 cycles	500 gf	9	-40°C to +85°C	-40°C to +85°C

Electrical:

Electrical Life	Non-switching Rating	Switching Rating	Contact Resistance	Insulation Resistance	Dielectric Strength	Circuit
1,000 cycles	100 mA, 50 V dc	25 mA, 24 V dc	100 mΩ maximum at initial	100 MΩ minimum (at 500 V dc)	300 V ac / 1 minute	SPST

Material:

Base	: Nylon high-temp. thermoplastic
Color	: Black
Cover	: Nylon high-temp. thermoplastic
Color	: Black
Actuators	: LCP high-temp. thermoplastic
Color	: White
Contact	: Alloy copper with gold plated
Terminal	: Brass with gold plated
Tape	: KAPTON

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Ashok

DATE:

02/01/12

CHECKED BY:

Veena

DATE:

16/01/12

APPROVED BY:

DATE:

16/01/12

DRAWING TITLE:

Jack Screws - Screw Lock AccessoriesSIZE
A

DWG NO.

M10002506ELECTRONIC FILE
(F)NHDS-V_1_DWGREV
A

SCALE: NTS

U.O.M.: mm (Inches)

SHEET: 2 OF 2



PART NO.

DIL Switch - MCDHN Series

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	SN	02/01/12	Jagan	16/01/12		16/01/12


Soldering Process:

Cleaning:

- Only tape sealed types apply to wash process.
- Do not remove the tape before wash process.
- After soldering process, do not continue the wash process immediately. Please wait for at least 3 minutes.
- Apply alcoholic solvents as cleaning agent do not use other solvents or water.
- Ultrasonic cleaning is not recommended.
- The cleaning process per stage is maximum. 1 minute and the whole cleaning time are not to exceed 3 minutes.

Any flux enters the switch may fall the conductivity.

Reflow Temperature Profile: (reference)

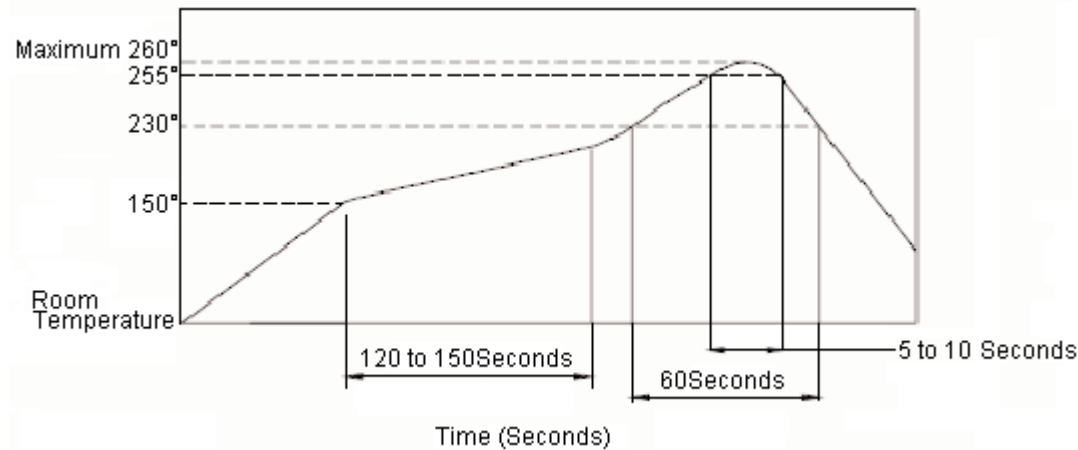

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Ashok

DATE:

02/01/12

CHECKED BY:

Veena

DATE:

16/01/12

APPROVED BY:

DATE:

16/01/12

DRAWING TITLE:

Jack Screws - Screw Lock AccessoriesSIZE
A

DWG NO.

M10002506ELECTRONIC FILE
(F)NHDS-V_1_DWGREV
A

SCALE: NTS

U.O.M.: mm (Inches)

SHEET: 3 OF 2



PART NO.

DIL Switch - MCDHN Series


REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	SN	14/01/12	JAG	14/01/12		28/01/12

Specification Table

Description	No. of Positions	Dimensions A	Part Numbers
Switch, DIP, SMD, 2 Way	2	3.77 (0.148)	MCDHN-02F-V
Switch, DIP, SMD, 4 Way	4	6.31 (0.248)	MCDHN-04F-V
Switch, DIP, SMD, 6 Way	6	8.85 (0.348)	MCDHN-06F-V
Switch, DIP, SMD, 8 Way	8	11.39 (0.448)	MCDHN-08F-V
Switch, DIP, SMD, 10 Way	10	13.93 (0.548)	MCDHN-10F-V

Part Number Explanation

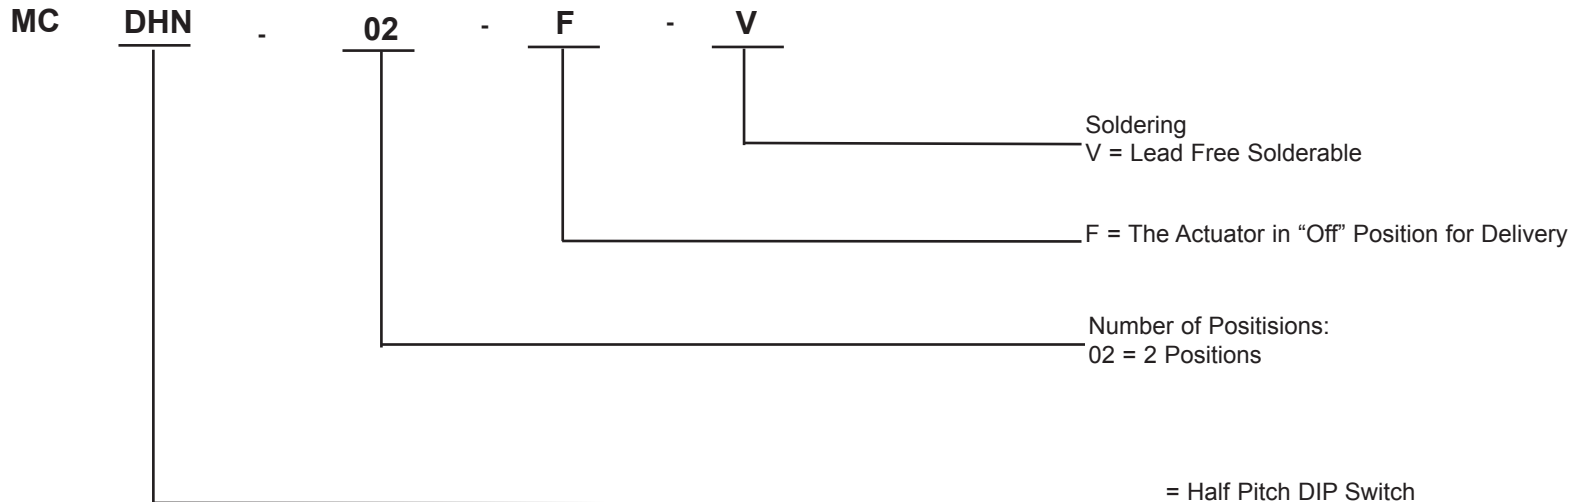Soldering
V = Lead Free Solderable

F = The Actuator in "Off" Position for Delivery

Number of Positions:
02 = 2 Positions= Half Pitch DIP Switch
(Terminal Length 6.7 mm)www.element14.com
www.farnell.com
www.newark.comNumber of Positions:
04 = 4, 06 = 6, 08 = 8 and 10 = 10 Positions

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:

SN

CHECKED BY:

Jagan

APPROVED BY:

DATE:

14/01/12

DATE:

14/01/12

DATE:

28/01/12

DRAWING TITLE:

Jack Screws - Screw Lock Accessories

SIZE	DWG NO.	ELECTRONIC FILE	REV
A	M10002506	(F)NHDS-V_1_DWG	A
SCALE: NTS		U.O.M.: mm (Inches)	SHEET: 4 OF 2