

A6 Series — Miniature Switches and Pilot Devices: 16mm

Key features of the A6 series switches and pilot lights include:

- 16mm (5/8") mounting hole
- LED illumination
- Compact design saves space
- Momentary, Maintained, Selectors, and E-Stops
- Gold-clad Silver contacts for reliable low level switching
- Snap action contacts
- IP40 (dustproof) or IP65 (oiltight) versions



A2

Switches & Pilot Devices



UL Recognized
File No.E55996



CSA Certified
File No. LR21451



Certificate No.
2030010305027380

Specifications	Degree of Protection		IP40: Dustproof IP65 Waterproof/Oiltight/Corrosion Resistant							
	Contact Configuration		SPDT, DPDT							
	Maximum Voltage		250V AC/DC							
	Thermal Current		3A							
	Minimum Applicable Load		5V AC/DC, 1mA (subject to operating conditions)							
	Contact Material		Gold-clad silver							
	Terminal Style		.110" Solder/ Quick Connect							
	Operating Temperature		LED Type: -25° to +55°C (no freezing)							
	Operating Humidity		45 to 85% RH							
	Contact Resistance		50mΩ maximum (initial value)							
	Insulation Resistance		100MΩ minimum (500V DC megger)							
	Vibration Resistance		10 to 55Hz, amplitude 1.5mm p-p							
	Shock Resistance		Damage limits: 500m/sec ² (approx. 50G) Operating extremes: 200m/sec ² (approx. 20G)							
	Electrical Life		100,000 operations minimum (at full rated load)							
	Contact Ratings	Mechanical Life		Maintained: 100,000 operations minimum Momentary: 1,000,000 operations minimum Selector/Keylock: 250,000 operations minimum						
Dielectric Strength		Switch Unit: 2,000VAC, 1 min. between live/dead part and terminals of different poles; 1,000V AC, 1 minute between terminals of the same pole; 1,500V AC, 1 minute between contact and lamp terminals. Illumination Unit: 2,000VAC, 1 min. between live part/ground								
Soldering Temperature		20W/5 seconds or 260°C/3 seconds								
Operating Voltage		24V		120V		240V				
LED Lamp Ratings	AC (50/60Hz)	Resistive	—		1.0A		0.5A			
		Inductive	—		0.7A		0.5A			
	DC	Resistive	1.0A		0.2A		—			
		Inductive	0.7A		0.1A		—			
Rated Voltage/Current			5V DC ±5%		6V AC/DC (±10%)		12V AC/DC (±10%)		24V AC/DC (±10%)	
			8mA		DC: A, R, W, Y: 6mA G, S: 5mA AC: A, R, W, Y: 8mA G, S: 7mA		DC: 8mA AC: 9mA		DC: 8mA AC: 9mA	



1. AC Inductive Load, PF = 0.6 – 0.7; DC Inductive Load, L/R = 7ms.
2. Minimum applicable load (reference value) is 5V AC/DC/1mA (applicable range is subject to the operating conditions and load).
3. LED lamp contains a built-in current-limiting resistor and a protection diode.
4. LED's don't "burn out." Luminance is reduced to 50% of initial intensity after being lit for 50,000 hours continuously.

A2

Switches & Pilot Devices

AB6 Non-Illuminated Pushbuttons (Assembled)

Part Numbers: Non-Illuminated Pushbuttons

	Style	Contact	Part Number			
			Momentary		Maintained (Latching)	
			Dustproof (IP40)	Oiltight (IP65)	Dustproof (IP40)	Oiltight (IP65)
Standard Button	Round 18mm 	SPDT DPDT	AB6M-M1-① AB6M-M2-①	AB6M-M1P-① AB6M-M2P-①	AB6M-A1-① AB6M-A2-①	AB6M-A1P-① AB6M-A2P-①
	Square 18mm 	SPDT DPDT	AB6Q-M1-① AB6Q-M2-①	AB6Q-M1P-① AB6Q-M2P-①	AB6Q-A1-① AB6Q-A2-①	AB6Q-A1P-① AB6Q-A2P-①
	Rectangular 18mm x 24mm 	SPDT DPDT	AB6H-M1-① AB6H-M2-①	AB6H-M1P-① AB6H-M2P-①	AB6H-A1-① AB6H-A2-①	AB6H-A1P-① AB6H-A2P-①
Oversize Button	Round 23.5mm 	SPDT DPDT	—	AB6M-M1P-M① AB6M-M2P-M①	—	AB6M-A1P-M① AB6M-A2P-M①
	Square 23.5mm 	SPDT DPDT	—	AB6Q-M1P-Q① AB6Q-M2P-Q①	—	AB6Q-A1P-Q① AB6Q-A2P-Q①
	Rectangular 17.5 X 23.5mm 	SPDT DPDT	—	AB6Q-M1P-H① AB6Q-M2P-H①	—	AB6Q-A1P-H① AB6Q-A2P-H①

① Button Color Code

Color	Code
Black	B
Green	G
Red	R
Blue	S
White	W
Yellow	Y



1. In place of ①, specify Button Color Code from the table at the right.
2. To order as sub-assembled, see page A2-19.
3. For accessories, see page A2-25.
4. For dimensions, see page A2-27.

Part Numbers: AB6-V Pushlock Turn Reset

Shape	Operation	Contact	Part Number		Remarks
			Dustproof (IP40)	Oiltight (IP65)	
23.5mm Round Mushroom 	Pushlock Turn Reset	SPDT DPDT	AB6M-V1-R AB6M-V2-R	AB6M-V1P-R AB6M-V2P-R	1. Button available in red only. 2. Replacement button: order AB6M-V-R

Part Numbers: Buzzer

Style	Shape	Voltage	Part Number
	Round (18mm)	12V DC	UZ6-11
		24V DC	UZ6-12

A2

Switches & Pilot Devices



Part Numbers: Buttons/Lens

① Button Color Code

Color	Code
Black	B
Green	G
Red	R
Blue	S
White	W
Yellow	Y



1. In place of ①, specify Button Color Code from table on right.
2. Buttons which are rated IP65 include a waterproof rubber gasket.
3. For accessories, see page A2-25.

AL6 Illuminated Pushbuttons (Assembled)

Part Numbers: LED Illuminated Pushbuttons

A2

Switches & Pilot Devices

Description	Style	Voltage	Contact	Part Numbers			
				Momentary		Maintained (Latching)	
				Dustproof (IP40)	Oiltight (IP65)	Dustproof (IP40)	Oiltight (IP65)
Standard Lens	Round 18mm diameter 	24V AC/DC ±10%	SPDT DPDT	AL6M-M14-② AL6M-M24-②	AL6M-M14P-② AL6M-M24P-②	AL6M-A14-② AL6M-A24-②	AL6M-A14P-② AL6M-A24P-②
	Square 18mm 	24V AC/DC ±10%	SPDT DPDT	AL6Q-M14-② AL6Q-M24-②	AL6Q-M14P-② AL6Q-M24P-②	AL6Q-A14-② AL6Q-A24-②	AL6Q-A14P-② AL6Q-A24P-②
	Rectangular 18mm x 24mm 	24V AC/DC ±10%	SPDT DPDT	AL6H-M14-② AL6H-M24-②	AL6H-M14P-② AL6H-M24P-②	AL6H-A14-② AL6H-A24-②	AL6H-A14P-② AL6H-A24P-②
Oversize Lens	Round 24mm diameter 	24V AC/DC ±10%	SPDT DPDT	—	AL6M-M14P-M② AL6M-M24P-M②	—	AL6M-A14P-M② AL6M-A24P-M②
	Square 24 mm 	24V AC/DC ±10%	SPDT DPDT	—	AL6Q-M14P-Q② AL6Q-M24P-Q②	—	AL6Q-A14P-Q② AL6Q-A24P-Q②
	Rectangular 18mm x 24mm 	24V AC/DC ±10%	SPDT DPDT	—	AL6Q-M14P-H② AL6Q-M24P-H②	—	AL6Q-A14P-H② AL6Q-A24P-H②



1. In place of ②, specify Lens/LED Color Code from table below.
2. Lamps also available in 5V DC, 6V AC/DC or 12 V AC/DC, change "4" using voltage/lamp codes (ie AL6M-M13-② uses 12V AC/DC LED).
3. LED lamp is included in unit and contains a current-limiting resistor and a protection diode. (External resistor not required.)
4. To order as sub-assembled, see page A2-21.
5. For accessories, see page A2-25.
6. For dimensions, see page A2-27.

② Lens/LED Color Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
White	W
Yellow	Y

Voltage Code

Voltage	Code
5V DC	1
6V AC/DC	2
12V AC/DC	3
24V AC/DC	4

A2

Switches & Pilot Devices



Part Numbers: Lenses



1. In place of ②, specify Lens Color Code from table below.
2. Lenses which are rated IP65 include a waterproof rubber gasket.
3. For accessories, see page A2-25.

② Lens/LED Color Code

Part Numbers: LED Lamps

In place of ②, specify LED Color Code from table at left.

AL6 Pilot Lights (Assembled)

Part Numbers: LED Pilot Lights

A2

Switches & Pilot Devices

Description	Voltage	Part Number	
		Dustproof (IP40)	Oiltight (IP65)
Round (18mm Lens) 	24V AC/DC	AL6M-P4-②	AL6M-P4P-②
Square (18mm Lens) 	24V AC/DC	AL6Q-P4-②	AL6Q-P4P-②
Rectangular (18mm x 24mm Lens) 	24V AC/DC	AL6H-P4-②	AL6H-P4P-②

② Lens/LED Color Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
White	W
Yellow	Y



1. In place of ②, specify LED/Lens Color Code.
2. Lamps also available in 5V DC, 6V AC/DC or 12 V AC/DC, change "4" using voltage codes (ie AL6M-P3-② uses 12V AC/DC lamp).
3. LED Lamp is included and contains built-in current limiting resistor and reverse polarity protection diode. (no external resistor required)
4. To order sub-assembled, see page A2-23.
5. For accessories, see page A2-25.
6. For dimensions, see page A2-27.
7. For one piece pilot lights and/or dome lens pilot lights, see page A5-210.

Voltage Code

Voltage	Code
5V DC	1
6V AC/DC	2
12V AC/DC	3
24V AC/DC	4

A2

Switches & Pilot Devices



Part Numbers: Lenses



1. In place of ②, specify Lens Color Code from table below.
2. Lenses which are rated IP65 include a waterproof rubber gasket.
3. For accessories, see page A2-25.

② Lens/LED Color Code

Part Numbers: LED Lamps



In place of ②, specify LED Color Code from table at left.

AS6 Selector and Keylock Switches (Assembled)

Part Numbers: AS6 Selector Switches and Keylock Switches (2- & 3- Position)

Style		Function		Selector Switches	Keylock Switches
Round Selector  Round Keylock 	2-Position 90°	Maintained	 R	AS6M-2Y2P	AS6M-2KT2P①
		Spring Return Right	 R	AS6M-21Y2P	AS6M-21KT2PB
	3-Position 45°	Maintained	 C R	AS6M-3Y2P	AS6M-3KT2P①
		Spring Return Right → Center	 C R	AS6M-31Y2P	AS6M-31KT2P①
		Spring Return Left → Center	 C R	AS6M-32Y2P	AS6M-32KT2P①
		2-Way Return → Center	 C R	AS6M-33Y2P	AS6M-33KT2PD
Square Selector  Square Keylock 	2-Position 90°	Maintained	 R	AS6Q-2Y2P	AS6Q-2KT2P①
		Spring Return to Right	 R	AS6Q-21Y2P	AS6Q-21KT2PB
	3-Position 45°	Maintained	 C R	AS6Q-3Y2P	AS6Q-3KT2P①
		Spring Return Right → Center	 C R	AS6Q-31Y2P	AS6Q-31KT2P①
		Spring Return Left → Center	 C R	AS6Q-32Y2P	AS6Q-32KT2P①
		2-Way Return → Center	 C R	AS6Q-33Y2P	AS6Q-33KT2PD
Rectangular Selector  Rectangular Keylock 	2-Position 90°	Maintained	 R	AS6H-2Y2P	AS6H-2KT2P①
		Spring Return Right	 R	AS6H-21Y2P	AS6H-21KT2PB
	3-Position 45°	Maintained	 C R	AS6H-3Y2P	AS6H-3KT2P①
		Spring Return Right → Center	 C R	AS6H-31Y2P	AS6H-31KT2P①
		Spring Return Left → Center	 C R	AS6H-32Y2P	AS6H-32KT2P①
		2-Way Return → Center	 C R	AS6H-33Y2P	AS6H-33KT2PD

Contact Operations (for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	 
	Right	 
3-pos. (DPDT)	Left	 
	Center	 
	Right	 

① Key Retention Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only
C	Key retained in left position only
D	Key retained in left and right (3 position only)
E	Key retained in center only (3 position only)
G	Key retained right and center (3 position only)
H	Key retained left and center (3 position only)



- For more information on these options, contact your IDEC representative.
- Key cannot be removed in a spring return position.



- In place of ①, specify Key Retention Code. See table on right.
- All models are IP65 and DPDT.
- Available as assembled units only.
- For accessories, see page A2-25.
- For dimensions, see page A2-27.

Accessories — A Series: 16mm

Appearance		Description	Used With	Part Number
Locking Ring Wrench		Made of metal. Used for tightening plastic locking ring during installation. Tightening torque should not exceed 3kgf-cm	Ø 5/8" (16mm) units	MT-001
			Ø 31/64" (12mm) AP2M units	MT-002
			Ø 13/32" (10mm) AP1M units	MT-003
Lens Removal Tool		Made of metal. Used for removing lens or button from the housing	All pushbuttons and pilot lights	MT-101
Lamp Holder Tool		Made of rubber. Used for removing and replacing LED lamps in illuminated units	All illuminated pushbuttons and pilot lights	OR-77
Switch Guard		Prevents inadvertent switch operation. IP40 dust-tight rated. 90 degrees opening maintained	Round/Square	AL-K6
			Rectangular	AL-KH6
		Prevents inadvertent switch operation. IP65 oiltight rated 180 degrees opening, spring return	Round/Square	AL-K6SP
			Rectangular	AL-KH6SP
Terminal Cover		Made of translucent nylon. Fits over and shields the terminals	All 5/8" (16mm) units	AL-V6
Dust Cover		Fits over the lens or button to provide protection from dust. (not applicable for oversize lenses or buttons)	All round units	AL-D6
			All square units	AL-DQ6
			All rectangular units	AL-DH6
Adaptor Socket		Plug-on terminal adaptor with solder terminal	All 5/8" (16mm) units	AL-C6
		Plug-on terminal adaptor with PCB terminal		AL-C6V
Mounting Hole Plug		Fills unused panel cutouts. Made of nitrile rubber. Push-in installation from front of panel. IP65 (oiltight) rated.	Rubber	AL-B6
		Fills unused panel cutouts. Made of aluminum. Screw-on locking ring from inside of panel. IP65 (oiltight) rated.	Aluminum	AL-BM6
Replacement LED Lamps		LED with built in current limiting resistor (with all illuminated assemblies).	5V DC	LATD-5②
			6V AC/DC	LATD-6②
			12V AC/DC	LATD-1②
			24V AC/DC	LATD-2②
Replacement Locking Ring		Fastens operators to panel (included with all operators).	All switches & pilot lights	HA9Z-LN
Anti-Rotation Ring		Prevents rotation of switches in panel (included with all operators).	All switches & pilot lights	AL6-LP
Replacement Engraving Inserts		Engraving plates to allow legends underneath translucent lenses (included with all lenses).	Round standard	AL6M-W
			Square standard	AL6Q-W
			Rectangular standard	AL6H-W
			Round oversize	AL6M-MW
			Square/rectangular oversize	AL6Q-QW
Replacement Keys		Pair of keys (#132). All key switches use same standard key.	All key selectors	AS6-SK

A2
Switches & Pilot Devices


1. In place of ② specify color code. A=Amber, W=White, G=Green, Y=Yellow, R=Red, S=Blue.
2. LEDs include built-in current limiting resistor and reverse polarity protection diode.


A2

Switches & Pilot Devices


Terminal Arrangement

(Top View)

Illuminated Pushbuttons

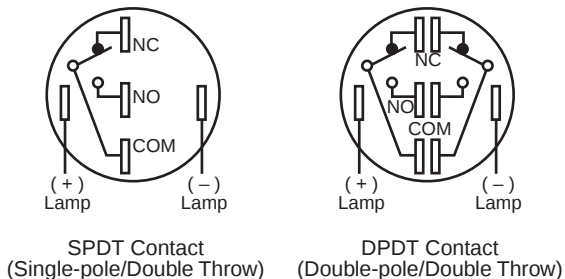



Non-illuminated Pushbuttons and Selector Switches

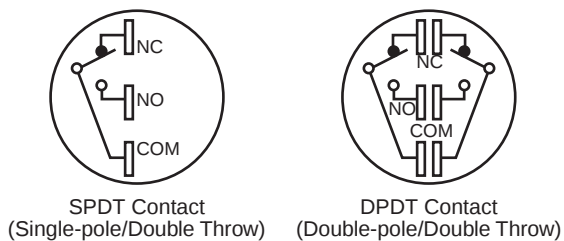

IDEC's Superbright LED

Internal Circuit


LATD-1,-2,-6 (GS)




LATD-5 (ARWY)



LATD-1,-2,-6 (ARWY)




LATD-5 (GS)




Dimensions — A Series: 5/8" (16mm)


Pushbuttons, Ø 5/8" (16mm)

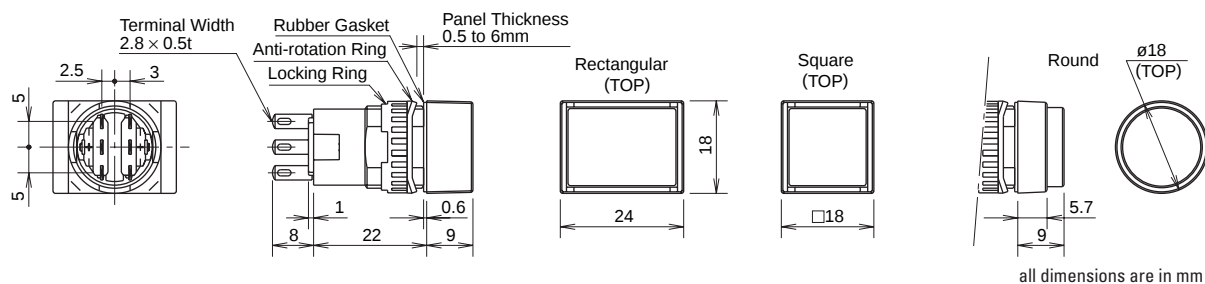




Large Size Lens

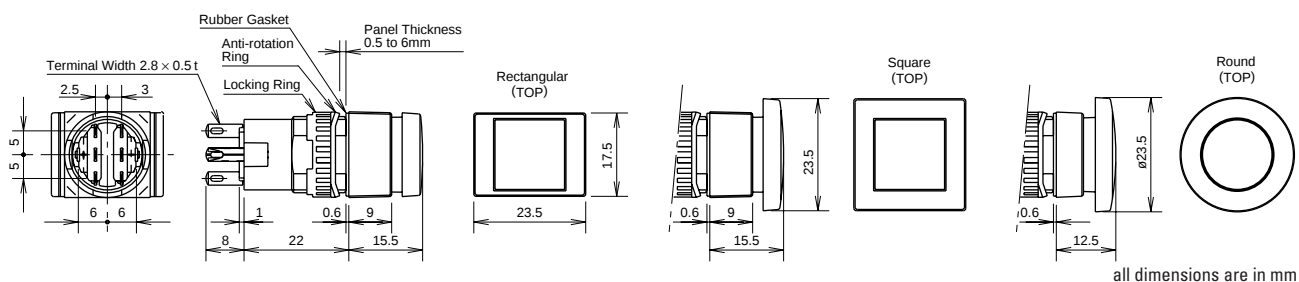

Selector Switches, Ø 5/8" (16mm)

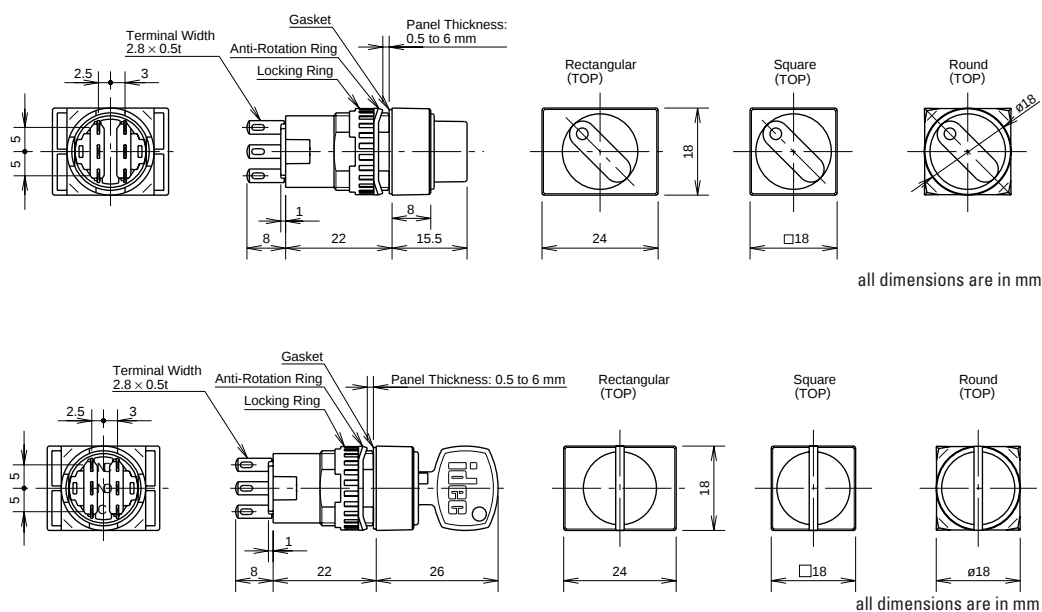


Switch Guard, Ø 5/8" (16mm)

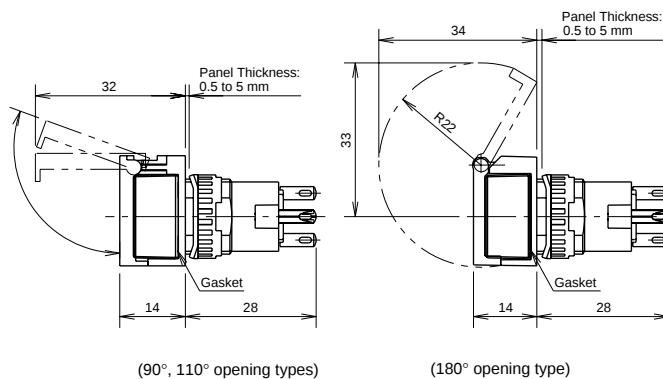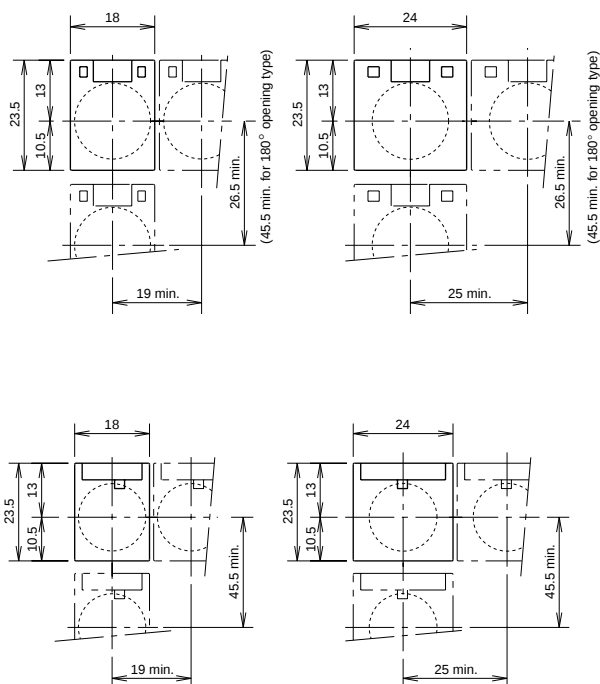


Terminal Sockets

AL-C6, 5/8" (16mm), Solder

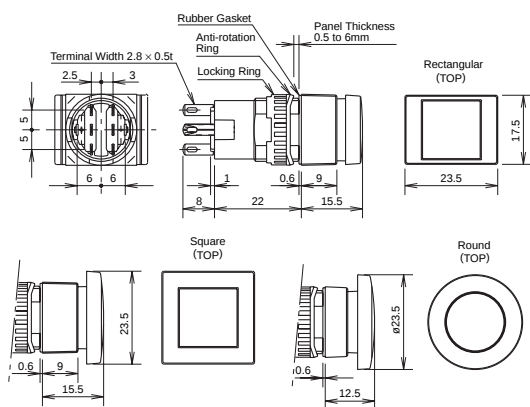


AL-C6V, Ø 5/8" (16mm), PCB

Terminal: $0.012 \times 0.059''$
(0.3 x 1.5)

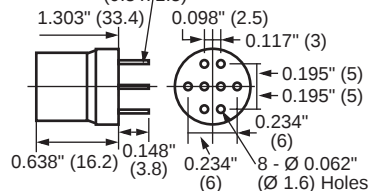


Dust Covers


AL-D6, Round



AL-DQ6, Square




AL-DH6, Rectangular




Panel Cut-Outs For Units w/Dust Cover

Round/Square






Rectangular



Dimensions con't



Marking Plates for Pushbuttons with Standard Size Lens

Style	Round—AL6M-W	Square—AL6Q-W	Rectangular—AL6H-W
Dimensions			
Ø 5/8" (16mm)			
Outside (OD)	Ø 0.538" (13.8mm)	□ 0.538" (13.8mm)	0.538" x 0.772" (13.8 x 19.8mm)
Marking Area (a)	Ø 0.468" (12mm)	□ 0.468" (12mm)	0.468" x 0.702" (12 x 18mm)



Engraving must be made on the engraving area within 0.02" (0.5mm) deep.

Marking Plates for Pushbutton with Oversize Lens

Style	Round—AL6M-MW	Square/Rectangular—AL6Q-QW
Dimensions		
Outside (OD)	Ø 0.491" (12.6mm)	□ 0.491" (12.6mm)
Marking Area (a)	Ø 0.429" (11mm)	□ 0.429" (11mm)

Replacing Lens and Marking Plate

Removal

Remove the lens holder assembly (lens, marking plate and holder) from the operator by holding the color lens recesses with the lens removal tool (Part No.MT-101) and pulling out. Remove marking plate by pushing the color lens from the rear to disengage the latches. Marking plate must be engraved on the side as shown in the figure on the right.

Installation

For illuminated and non-illuminated pushbuttons:

1. Insert marking plate inside lens in correct direction.
(For non-illuminated, install marking plate when replacing button).
2. Press color lens on to lens holder to engage latches.
3. Insert lens holder into housing in correct direction.



Do not loosen spring on illuminated pushbutton units (except on pilot light units). The marking plate must be engraved on the front side as shown above.

Ø 5/8" (16mm)

