


Time-Delay Ferrule Fuse

13/32" x 1-1/2"

FNM

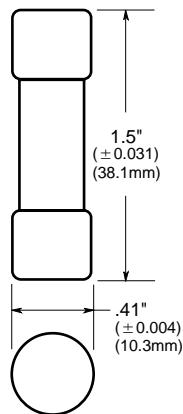

- Fibre tube.
- For circuits with high inrush currents.
- Formerly designated 5AB.
- Fusetron® Dual-Element fuse.



Recommended fuseblocks/fuseholders for
13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

Catalog Symbol: FNM

TIME-DELAY

1/10 TO 30A

Interrupting Rating - SEE CHART BELOW

UL Listed: STD. 248-14, 0-10/250Vac; 12-15/125Vac

FILE #E19180, GUIDE #JDYX

CSA Certified: 1-10/250Vac; CLASS 1422-01,

12-15/125Vac; FILE 53787

Electrical Ratings (Catalog Symbol and Amperes)

| 250Vac IR | 250Vac IR | 250Vac IR | 125Vac |
|------------|-------------------|------------------|-----------------|
| FNM-1/10 | FNM-1-1/8 | FNM-4 | FNM-12 10,000 |
| FNM-1/8 | FNM-1-1/4 | FNM-4-1/2 | FNM-15 @ 125Vac |
| FNM-15/100 | FNM-1-4/10 | FNM-5 | - |
| FNM-2/10 | FNM-1-1/2 | FNM-5-6/10 | - |
| FNM-1/4 | 35A @ FNM-1-6/10 | 100A @ FNM-6 | 32Vac |
| FNM-3/10 | 250Vac FNM-1-8/10 | 250Vac FNM-6-1/4 | 200A @ FNM-20 |
| FNM-4/10 | 10,000 FNM-2 | 10,000 FNM-7 | 250Vac FNM-25 |
| FNM-1/2 | @ FNM-2-1/4 | @ FNM-8 | 10,000 @ FNM-30 |
| FNM-6/10 | 125Vac FNM-2-1/2 | 125Vac FNM-9 | - |
| FNM-3/4 | FNM-2-8/10 | FNM-10 | - |
| FNM-8/10 | FNM-3 | - | - |
| FNM-1 | FNM-3-2/10 | - | - |
| - | FNM-3-1/2 | - | - |

If 250Vac is needed for 12-30A, use FNW series.

Carton Quantity and Weight

| Ampere Ratings | Carton Qty | Weight Lbs. | Weight Kg. |
|----------------|------------|-------------|------------|
| 0-30 | 10 | .125 | .057 |


 CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Time-Delay Ferrule Fuse

13/32" x 1-1/2"

FNM

Time-Current Characteristic Curves—Average Melt

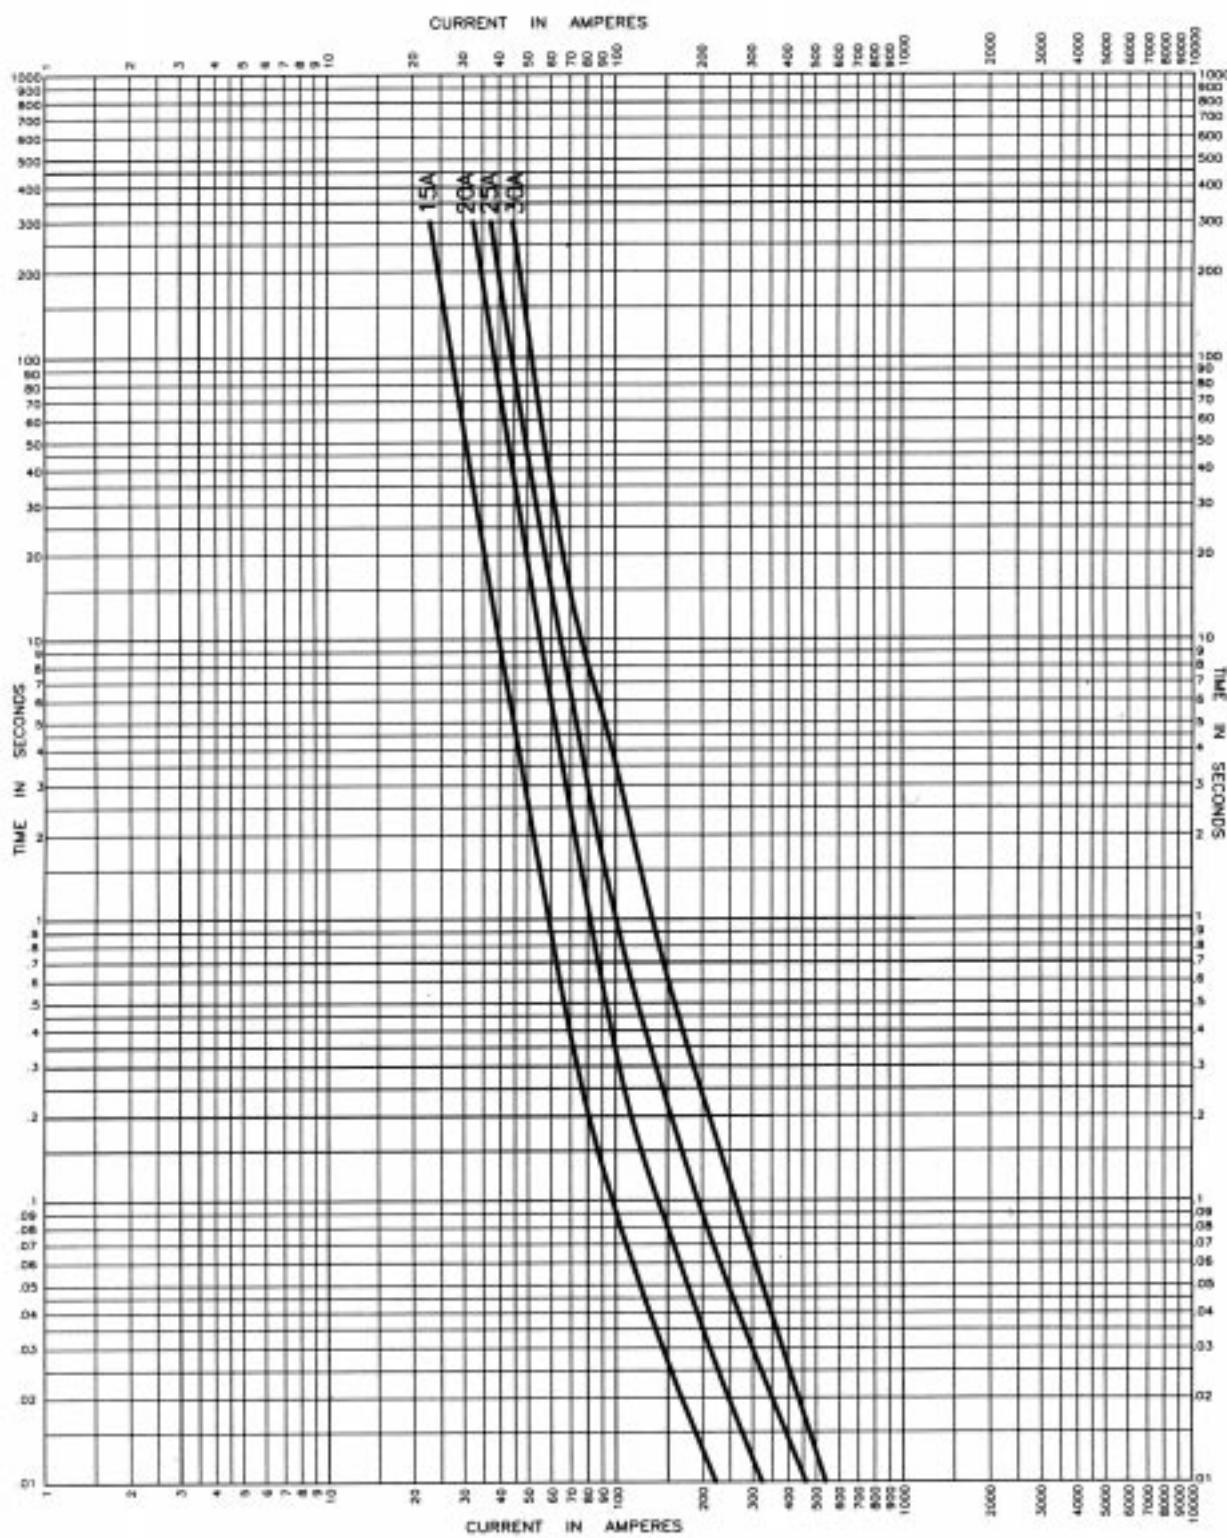

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.