


Features

Timer modules for use in conjunction with relay & socket.

86.00 - Multi-function & multi-voltage timer module

- Timer module for 90 and 92 series sockets
- Wide supply voltage range (12 - 240 V)
- LED indicator

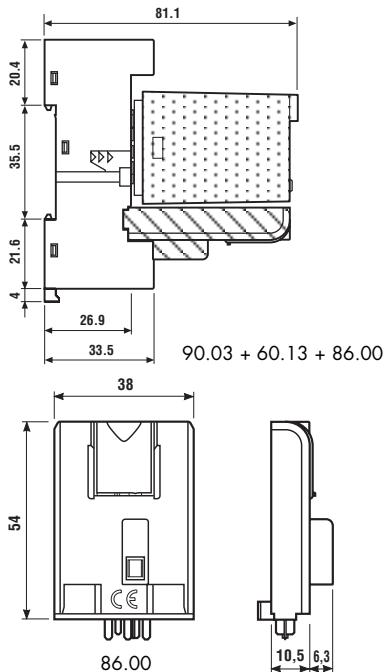

86.00



- Time scale: from 0.05s to 100 h
- Multi-function
- Plug-in for use with 90.02, 90.03 and 92.03 sockets

AI: ON delay

DI: ON pulse

SW: Symmetrical recycling: ON start


BE: Signal OFF delay

CE: Signal ON & OFF delay


DE: Signal ON pulse

EE: Signal OFF pulse

FE: Signal ON delay + OFF pulse



wiring diagram
without signal START



wiring diagram
with signal START

Contact specification

Contact configuration

Rated current/Maximum peak current	A
Rated voltage/Maximum switching voltage	V AC
Rated load AC1	VA
Rated load AC15 (230 V AC)	VA
Single phase motor rating (230 V AC)	kW
Breaking capacity DC1: 30/110/220 V	A
Minimum switching load	mW (V/mA)

see 60 and 62 series relays

Note: Do not use with relays 62.3x.x012.x300 and 62.3x.x012.x600

Standard contact material

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	12...240
	V DC	12...240
Rated power AC/DC	W	1.2
Operating range	V AC (50/60 Hz)	10.2...265
	DC	10.2...265

Technical data

Specified time range	(0.05...1)s, (0.5...10)s, (5...100)s, (0.5...10)min, (5...100)min, (0.5...10)h, (5...100)h	
Repeatability	%	± 1
Recovery time	ms	≤ 50
Minimum control impulse	ms	50
Setting accuracy full range	%	± 5
Electrical life at rated load in AC1	cycles	see 60 and 62 series relays
Ambient temperature range	°C	-20...+50
Protection category		IP 20
Approvals (according to type)	  	

Features


Timer modules for use in conjunction with relay & socket.

86.10 - ON delay timer module

86.20 - ON pulse timer module

- Timer module for 90, 92, 94 and 95 series sockets

- LED indicator

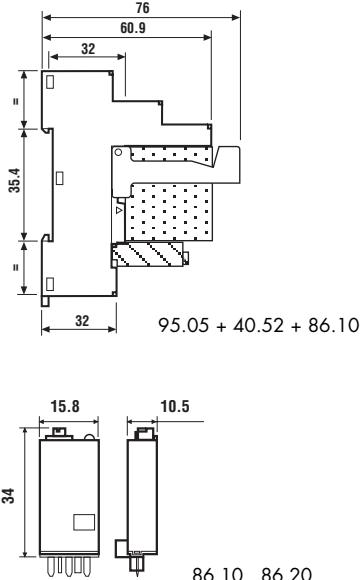


86.10



- Mono-function
- Plug-in for use with 90.02, 90.03, 92.03, 94.02, 94.03, 94.04, 95.03, 95.05 sockets

AI: ON delay




wiring diagram
without signal START

86.20



- Mono-function
- Plug-in for use with 90.02, 90.03, 92.03, 94.02, 94.03, 94.04, 95.03, 95.05 sockets

DI: ON pulse



wiring diagram
without signal START

Contact specification

Contact configuration

Rated current/Maximum peak current A

Rated voltage/Maximum switching voltage V AC

Rated load AC1 VA

Rated load AC15 (230 V AC) VA

Single phase motor rating (230 V AC) kW

Breaking capacity DC1: 30/110/220 V A

Minimum switching load mW (V/mA)

see 40, 44, 55, 60 and 62 series relays

see 40, 44, 55, 60 and 62 series relays

Standard contact material

Supply specification

Nominal voltage (U_N) V AC (50/60 Hz)

12...24

12...24

V DC

12...24 (non polarized)

12...24 (non polarized)

Rated power AC/DC mW

150

150

Operating range AC

(0.8...1.1) U_N

(0.8...1.1) U_N

DC

(0.8...1.1) U_N

(0.8...1.1) U_N

Technical data

Specified time range

(1.5...15)s,(6...60)s,(0.8...8)min,(6.4...64)min

(1.5...15)s,(6...60)s,(0.8...8)min,(6.4...64)min

Repeatability %

± 1

± 1

Recovery time ms

≤ 150

≤ 150

Minimum control impulse ms

—

—

Setting accuracy-full range %

± 5

± 5

Electrical life at rated load in AC1 cycles

see 40, 44, 55, 60 and 62 series relays

see 40, 44, 55, 60 and 62 series relays

Ambient temperature range °C

0...+50

0...+50

Protection category

IP 20

IP 20

Approvals (according to type)



Ordering information

Example: 86 series multi-function timer module, (12...240)V AC/DC supply voltage.

8 6 . 0 0 . 0 . 2 4 0 . 0 0 0 0

Series

Type

0 = Multi-function (AI, DI, SW, BE, CE, DE, EE, FE)
1 = Mono-function (AI)
2 = Mono-function (DI)

No. of poles

see 40, 44, 55, 60 and 62 series relays
Poles for chosen relay/socket combination -
according to chart below

Supply voltage

024 = (12...24)V AC/DC (86.10/20 only)
240 = (12...240)V AC/DC (86.00 only)

Supply version

0 = AC (50/60 Hz)/DC

Combinations

Number of poles	Relay type	Socket type	Timer module
1	40.31	95.03	86.10/86.20
1	40.61	95.05	86.10/86.20
2	40.52/44.52/44.62	95.05	86.10/86.20
2	55.32	94.02	86.10/86.20
2	60.12	90.02	86.00/86.10/86.20
2	62.32	92.03	86.00/86.10/86.20
3	55.33	94.03	86.10/86.20
3	60.13	90.03	86.00/86.10/86.20
3	62.33	92.03	86.00/86.10/86.20
4	55.34	94.04	86.10/86.20







Technical data

EMC specifications

Type of test	Reference standard	86.00	86.10/20
Electrostatic discharge	EN 61000-4-2	4 kV	n.a.
air discharge	EN 61000-4-2	8 kV	8 kV
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)	EN 61000-4-3	10 V/m	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals	EN 61000-4-4	2 kV	2 kV
Surges (1.2/50 µs) on Supply terminals	common mode	2 kV	2 kV
	differential mode	1 kV	—
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals	EN 61000-4-6	10 V	10 V
Radiated and conducted emission	EN 55022	class B	class B
Other data	86.00	86.10, 86.20	
Current absorption on signal control (B1)	mA	1	—
Power lost to the environment	without contact current	W	0.1 (12 V) - 1 (230 V)
	with rated current		see 60 and 62 series relays
			see 40, 44, 55, 60, 62 series relays

Time scales

Type 86.00

						
(0.05...1)s	(0.5...10)s	(5...100)s	(0.5...10)min	(5...100)min	(0.5...10)h	(5...100)h

Type 86.10

Type 86.20

			
(1.5...15)s	(6...60)s	(0.8...8)min	(6.4...64)min

NOTE: time scales and functions must be set before energising the timer.

Functions

U = Supply Voltage

S = Signal switch

 = Output Contact


LED Type 86.00	LED Type 86.10/20	Supply voltage	NO output contact
		OFF	Open
		ON	Open
		ON	Open (timing in progress)
		ON	Closed

Without signal Start= Start via contact in supply line (A1).

With signal Start = Start via contact into control terminal (B1).

Wiring diagram

Without signal START



Type 86.00

(A1) ON delay.

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.


(D1) ON pulse.

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.


(SW) Symmetrical recycling: ON start.

Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).

With signal START



* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1).

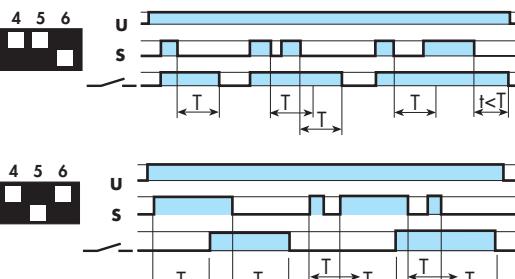
(BE) Signal OFF delay.

Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

(CE) Signal ON and OFF delay.

Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.

(DE) Signal ON pulse.


Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

(EE) Signal OFF pulse.

Power is permanently applied to the timer. On opening of the Signal Switch (S) the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

(FE) Signal ON pulse + OFF pulse.

Power is permanently applied to the timer. Both the opening and closing of the Signal Switch (S) initiates the transfer of the output contacts. In both instances the contacts reset after the delay period has elapsed.

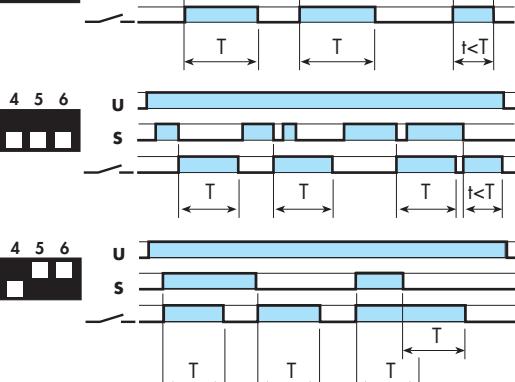
(A1) ON delay.

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.


(D1) ON pulse.

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.



95.05
Approvals
(according to type):




095.01




060.72

Screw terminal (Box clamp) socket panel or 35 mm rail (EN 50022) mount For relay type	95.03 Blue	95.03.0 Black	95.05 Blue	95.05.0 Black
	40.31		40.51 / 52 / 61	
Accessories				
Metal retaining clip		095.71		
Plastic retaining and release clip (supplied with socket - packaging code SPA)	095.01	095.01.0	095.01	095.01.0
8-way jumper link	095.18	095.18.0	095.18	095.18.0
Identification tag		095.00.4		
Timer modules		86.10, 86.20		
Sheet of marker tags for retaining and release clip 095.01 plastic, 72 tags, 6x12 mm		060.72		
Technical data				
Rated values	10 A - 250 V *			
Insulation	6 kV (1.2/50 µs) between coil and contacts			
Protection category	IP 20			
Ambient temperature	°C -40...+70			
 Screw torque	Nm 0.5			
Wire strip length	mm 8			
Max. wire size for 95.03 and 95.05 sockets	solid wire	stranded wire		
	mm ² 1x6 / 2x2.5	1x4 / 2x2.5		
	AWG 1x10 / 2x14	1x12 / 2x14		

* For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

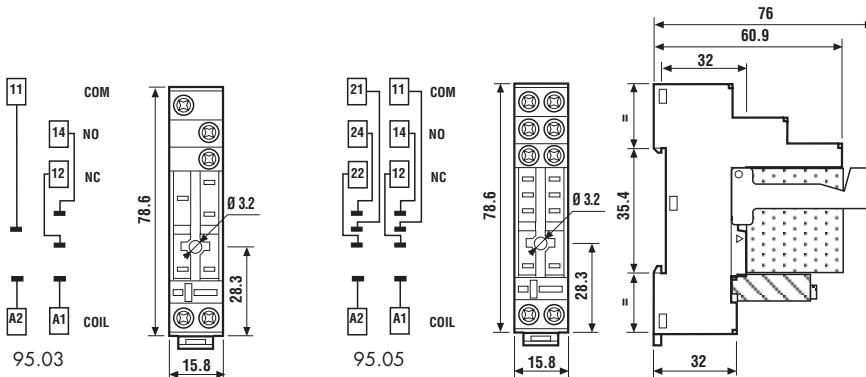

8-way jumper link for 95.03 and 95.05 sockets	095.18
Rated values	10 A - 250 V

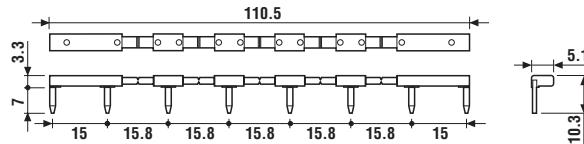



94.04

 Approvals
(according to type):


094.01

060.72

Screw terminal (Box clamp) socket panel or 35 mm rail (EN 50022) mount For relay type	94.02 Blue	94.02.0 Black	94.03 Blue	94.03.0 Black	94.04 Blue	94.04.0 Black
	55.32		55.33		55.32, 55.34	
Accessories						
Metal retaining clip					094.71	
Plastic retaining and release clip (supplied with socket - packaging code SPA)					094.01	
6-way jumper link	094.06	094.06.0	094.06	094.06.0	094.06	094.06.0
Identification tag					094.00.4	
Timer modules					86.10, 86.20	
Sheet of marker tags for retaining and release clip 094.01 plastic, 72 tags, 6x12 mm					060.72	
Technical data						
Rated values			10 A - 250 V			
Dielectric strength			≥ 2 kV AC			
Protection category			IP 20			
Ambient temperature		°C	-40...+70			
 Screw torque	Nm	0.5				
Wire strip length	mm	8				
Max. wire size for 94.02/03/04 sockets			solid wire	stranded wire		
	mm ²	1x6 / 2x2.5		1x4 / 2x2.5		
	AWG	1x10 / 2x14		1x12 / 2x14		

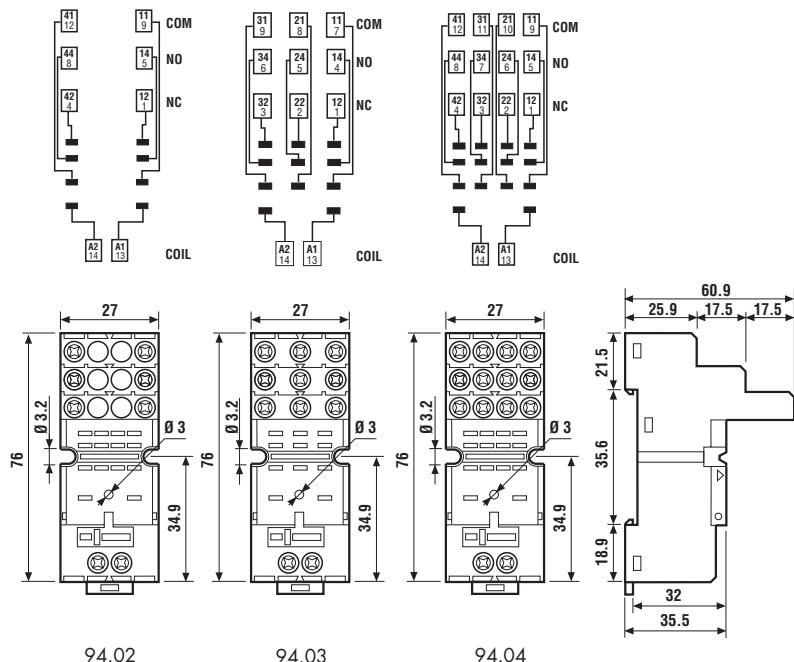
94.02
94.03
94.04

094.06
6-way jumper link for 94.02, 94.03 and 94.04 sockets
094.06





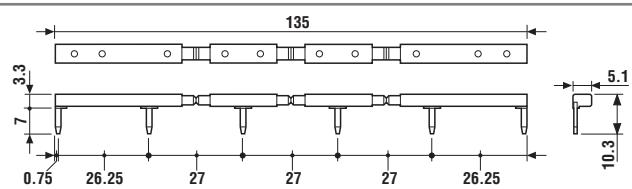
 Rated values
10 A - 250 V



90.03

Approvals
(according to type):

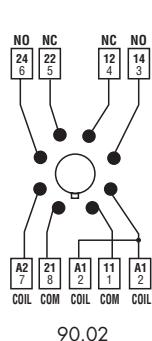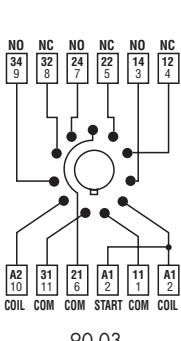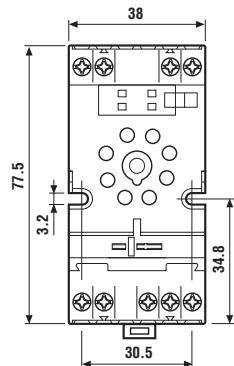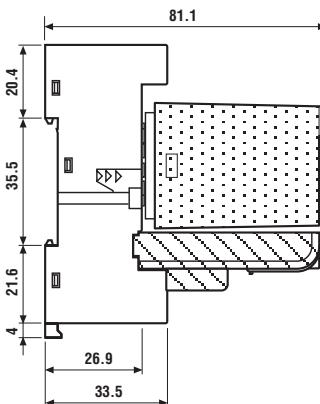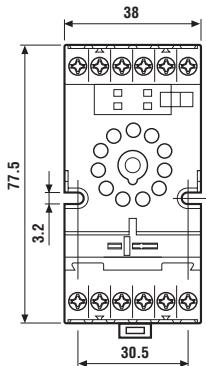


Screw terminal (Box clamp) socket panel or 35 mm rail (EN 50022) mount For relay type	90.02 Blue	90.02.0 Black	90.03 Blue	90.03.0 Black
	60.12		60.13	
Accessories				
Metal retaining clip		090.33		
6-way jumper link		090.06		
Identification tag		090.00.2		
Timer module		86.00, 86.10, 86.20		
Technical data				
Double terminal A1 (for easy start connection)				
Rated values	10 A - 250 V			
Dielectric strength	≥ 2 kV AC			
Protection category	IP 20			
Ambient temperature	$^{\circ}$ C	-40...+70		
 Screw torque	Nm	0.6		
Wire strip length	mm	10		
Max. wire size for 90.02 and 90.03 sockets		solid wire	stranded wire	
	mm ²	1x6 / 2x2.5	1x4 / 2x2.5	
	AWG	1x10 / 2x14	1x12 / 2x14	


90.02

90.03

090.06

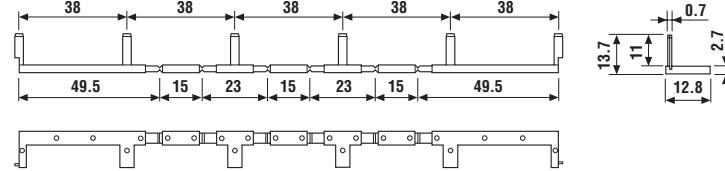Approvals
(according to type):



6-way jumper link for 90.02 and 90.03 sockets	090.06
Rated values	10 A - 250 V
	090.06 10 A - 250 V 38 mm 49.5 mm 15 mm 23 mm 15 mm 23 mm 15 mm 49.5 mm 13.7 mm 11 mm 2.7 mm 12.8 mm



92.03

 Approvals
(according to type):


Screw terminal (Box clamp) socket	92.03 (blue)	92.03.0 (black)
panel or 35 mm rail (EN 50022) mount		
For relay type	62.32, 62.33	
Accessories		
Metal retaining clip (supplied with socket - packaging code SMA)		092.71
Identification tag		092.00.2
Timer modules		86.00, 86.10, 86.20
Technical data		
Rated values	16 A - 250 V	
Insulation	≥ 6 kV (1.2/50 μ s) between coil and contacts	
Protection category	IP 20	
Ambient temperature	$^{\circ}$ C	-40...+70
 Screw torque	Nm	0.8
Wire strip length	mm	10
Max. wire size for 92.03 socket	solid wire	stranded wire
	mm ²	1x10 / 2x4
	AWG	1x8 / 2x12
		1x10 / 2x12

