

# ON Semiconductor

## Is Now



To learn more about onsemi™, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

onsemi and onsemi. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of the part. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

# NTP13N10

Preferred Device

## Power MOSFET

### 13 A, 100 V, N-Channel Enhancement-Mode TO-220

#### Features

- Source-to-Drain Diode Recovery Time Comparable to a Discrete Fast Recovery Diode
- Avalanche Energy Specified
- $I_{DSS}$  and  $R_{DS(on)}$  Specified at Elevated Temperature
- Pb-Free Package is Available

#### Typical Applications

- PWM Motor Controls
- Power Supplies
- Converters

#### MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Rating                                                                                                                                                                                                                  | Symbol                     | Value                | Unit                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------|--------------------------|
| Drain-to-Source Voltage                                                                                                                                                                                                 | $V_{DSS}$                  | 100                  | Vdc                      |
| Drain-to-Source Voltage ( $R_{GS} = 1.0\text{ M}\Omega$ )                                                                                                                                                               | $V_{DGR}$                  | 100                  | Vdc                      |
| Gate-to-Source Voltage<br>– Continuous<br>– Non-Repetitive ( $t_p \leq 10\text{ ms}$ )                                                                                                                                  | $V_{GS}$<br>$V_{GSM}$      | $\pm 20$<br>$\pm 30$ | Vdc                      |
| Drain Current<br>– Continuous @ $T_A = 25^\circ\text{C}$<br>– Continuous @ $T_A = 100^\circ\text{C}$<br>– Pulsed (Note 1)                                                                                               | $I_D$<br>$I_D$<br>$I_{DM}$ | 13<br>8.0<br>39      | Adc                      |
| Total Power Dissipation @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$                                                                                                                                   | $P_D$                      | 64.7<br>0.43         | W<br>W/ $^\circ\text{C}$ |
| Operating and Storage Temperature Range                                                                                                                                                                                 | $T_J, T_{stg}$             | $-55$ to $+175$      | $^\circ\text{C}$         |
| Single Drain-to-Source Avalanche Energy –<br>Starting $T_J = 25^\circ\text{C}$<br>( $V_{DD} = 50\text{ Vdc}$ , $V_{GS} = 10\text{ Vdc}$ ,<br>$I_L(pk) = 13\text{ A}$ , $L = 1.0\text{ mH}$ , $R_G = 25\text{ }\Omega$ ) | $E_{AS}$                   | 85                   | mJ                       |
| Thermal Resistance<br>– Junction-to-Case                                                                                                                                                                                | $R_{\theta JC}$            | 2.32                 | $^\circ\text{C/W}$       |
| Maximum Lead Temperature for Soldering<br>Purposes, 1/8" from case for 10 seconds                                                                                                                                       | $T_L$                      | 260                  | $^\circ\text{C}$         |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Pulse Test: Pulse Width = 10  $\mu\text{s}$ , Duty Cycle = 2%.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®


<http://onsemi.com>

| $V_{DSS}$ | $R_{DS(on)}$ TYP      | $I_D$ MAX |
|-----------|-----------------------|-----------|
| 100 V     | 165 m $\Omega$ @ 10 V | 13 A      |

#### N-Channel



#### MARKING DIAGRAM & PIN ASSIGNMENT

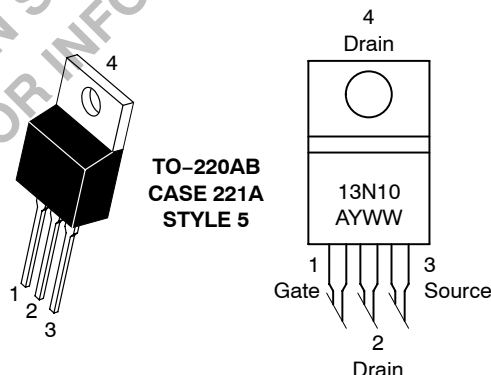

13N10 = Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week

#### ORDERING INFORMATION

| Device    | Package               | Shipping†     |
|-----------|-----------------------|---------------|
| NTP13N10  | TO-220AB              | 50 Units/Rail |
| NTP13N10G | TO-220AB<br>(Pb-Free) | 50 Units/Rail |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

Preferred devices are recommended choices for future use and best overall value.

# NTP13N10

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                                                                                                                                                                                                  |               |          |          |           |                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------|----------|-----------|-----------------------------|
| Drain-to-Source Breakdown Voltage<br>( $V_{GS} = 0\text{ Vdc}$ , $I_D = 250\text{ }\mu\text{Adc}$ )<br>Temperature Coefficient (Positive)                                                                        | $V_{(BR)DSS}$ | 100<br>– | –<br>147 | –<br>–    | Vdc<br>mV/ $^\circ\text{C}$ |
| Zero Gate Voltage Collector Current<br>( $V_{GS} = 0\text{ Vdc}$ , $V_{DS} = 100\text{ Vdc}$ , $T_J = 25^\circ\text{C}$ )<br>( $V_{GS} = 0\text{ Vdc}$ , $V_{DS} = 100\text{ Vdc}$ , $T_J = 125^\circ\text{C}$ ) | $I_{DSS}$     | –<br>–   | –<br>–   | 5.0<br>50 | $\mu\text{Adc}$             |
| Gate-Body Leakage Current ( $V_{GS} = \pm 20\text{ Vdc}$ , $V_{DS} = 0$ )                                                                                                                                        | $I_{GSS}$     | –        | –        | $\pm 100$ | nAdc                        |

### ON CHARACTERISTICS

|                                                                                                                                                                                          |              |          |                |                |                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|----------------|----------------|-----------------------------|
| Gate Threshold Voltage<br>$V_{DS} = V_{GS}$ , $I_D = 250\text{ }\mu\text{Adc}$<br>Temperature Coefficient (Negative)                                                                     | $V_{GS(th)}$ | 2.0<br>– | 3.2<br>–7.6    | 4.0<br>–       | Vdc<br>mV/ $^\circ\text{C}$ |
| Static Drain-to-Source On-State Resistance<br>( $V_{GS} = 10\text{ Vdc}$ , $I_D = 6.5\text{ Adc}$ )<br>( $V_{GS} = 10\text{ Vdc}$ , $I_D = 6.5\text{ Adc}$ , $T_J = 125^\circ\text{C}$ ) | $R_{DS(on)}$ | –<br>–   | 0.130<br>0.250 | 0.165<br>0.400 | $\Omega$                    |
| Drain-to-Source On-Voltage<br>( $V_{GS} = 10\text{ Vdc}$ , $I_D = 13\text{ Adc}$ )                                                                                                       | $V_{DS(on)}$ | –        | 1.82           | 2.34           | Vdc                         |
| Forward Transconductance ( $V_{DS} = 15\text{ Vdc}$ , $I_D = 6.5\text{ Adc}$ )                                                                                                           | $g_{FS}$     | –        | 6.0            | –              | mhos                        |

### DYNAMIC CHARACTERISTICS

|                              |                                                                                 |           |   |     |     |    |
|------------------------------|---------------------------------------------------------------------------------|-----------|---|-----|-----|----|
| Input Capacitance            | $(V_{DS} = 25\text{ Vdc}$ , $V_{GS} = 0\text{ Vdc}$ ,<br>$f = 1.0\text{ MHz}$ ) | $C_{iss}$ | – | 390 | 550 | pF |
| Output Capacitance           |                                                                                 | $C_{oss}$ | – | 115 | 160 |    |
| Reverse Transfer Capacitance |                                                                                 | $C_{rss}$ | – | 35  | 70  |    |

### SWITCHING CHARACTERISTICS (Notes 2 & 3)

|                     |                                                                                                               |              |   |     |    |    |
|---------------------|---------------------------------------------------------------------------------------------------------------|--------------|---|-----|----|----|
| Turn-On Delay Time  | $(V_{DD} = 80\text{ Vdc}$ , $I_D = 13\text{ Adc}$ ,<br>$V_{GS} = 10\text{ Vdc}$ , $R_G = 9.1\text{ }\Omega$ ) | $t_{d(on)}$  | – | 11  | 20 | ns |
| Rise Time           |                                                                                                               | $t_r$        | – | 40  | 80 |    |
| Turn-Off Delay Time |                                                                                                               | $t_{d(off)}$ | – | 20  | 40 |    |
| Fall Time           |                                                                                                               | $t_f$        | – | 36  | 70 |    |
| Gate Charge         | $(V_{DS} = 80\text{ Vdc}$ , $I_D = 13\text{ Adc}$ ,<br>$V_{GS} = 10\text{ Vdc}$ )                             | $Q_{tot}$    | – | 14  | 20 | nC |
|                     |                                                                                                               | $Q_{gs}$     | – | 3.0 | –  |    |
|                     |                                                                                                               | $Q_{gd}$     | – | 7.0 | –  |    |

### BODY-DRAIN DIODE RATINGS (Note 2)

|                                                                                                                                                            |          |        |              |          |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------|--------------|----------|---------------|
| Forward On-Voltage<br>$(I_S = 13\text{ Adc}$ , $V_{GS} = 0\text{ Vdc}$ )<br>$(I_S = 13\text{ Adc}$ , $V_{GS} = 0\text{ Vdc}$ , $T_J = 125^\circ\text{C}$ ) | $V_{SD}$ | –<br>– | 0.98<br>0.88 | 1.3<br>– | Vdc           |
| Reverse Recovery Time<br>$(I_S = 13\text{ Adc}$ , $V_{GS} = 0\text{ Vdc}$ ,<br>$dI_S/dt = 100\text{ A}/\mu\text{s}$ )                                      | $t_{rr}$ | –      | 85           | –        | ns            |
|                                                                                                                                                            | $t_a$    | –      | 60           | –        |               |
|                                                                                                                                                            | $t_b$    | –      | 28           | –        |               |
| Reverse Recovery Stored Charge                                                                                                                             | $Q_{RR}$ | –      | 0.3          | –        | $\mu\text{C}$ |

- Pulse Test: Pulse Width = 300  $\mu\text{s}$  max, Duty Cycle = 2%.
- Switching characteristics are independent of operating junction temperature.

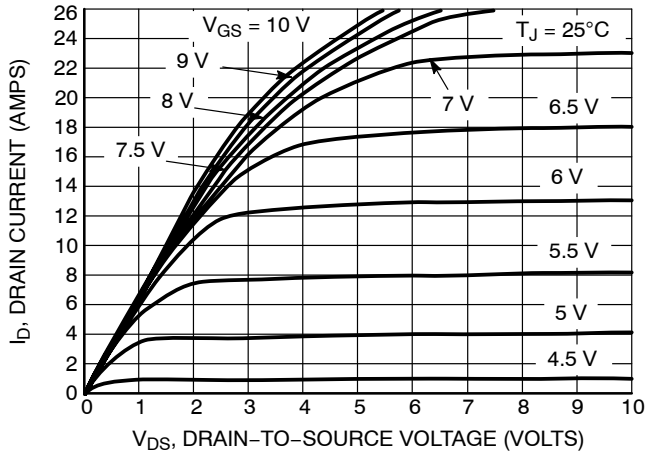


Figure 1. On-Region Characteristics

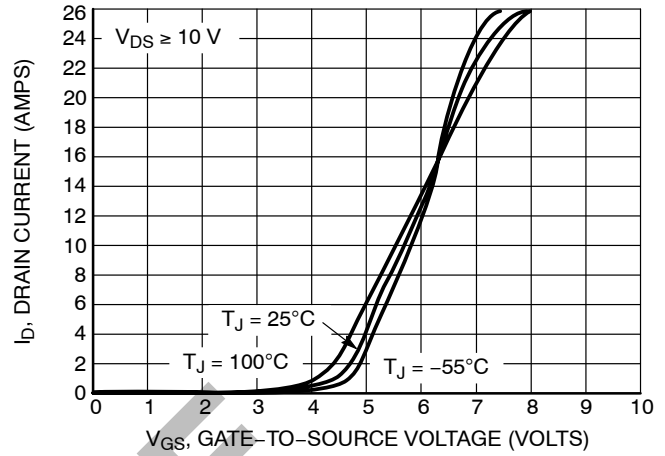


Figure 2. Transfer Characteristics

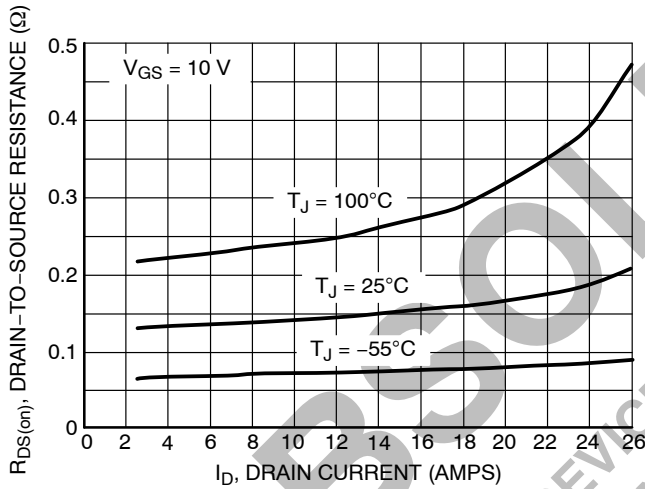


Figure 3. On-Resistance versus Drain Current and Temperature

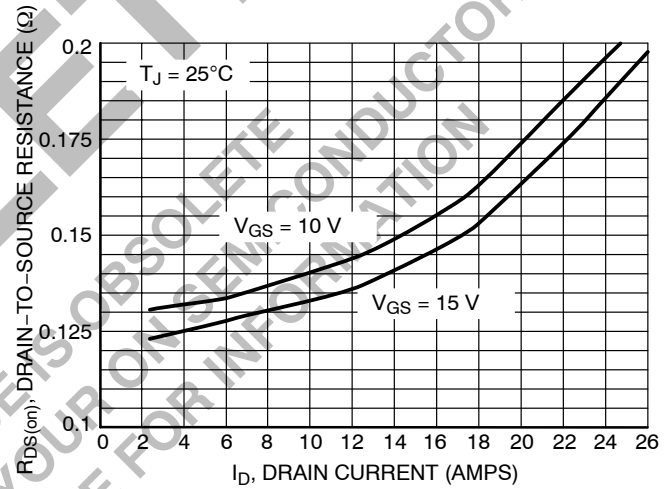


Figure 4. On-Resistance versus Drain Current and Gate Voltage

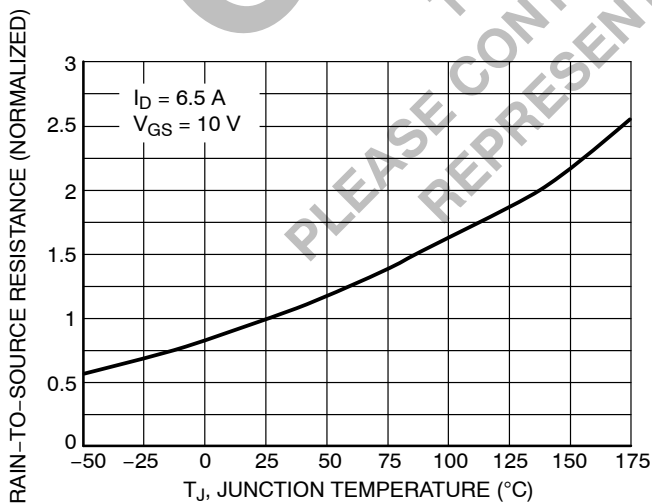


Figure 5. On-Resistance Variation with Temperature

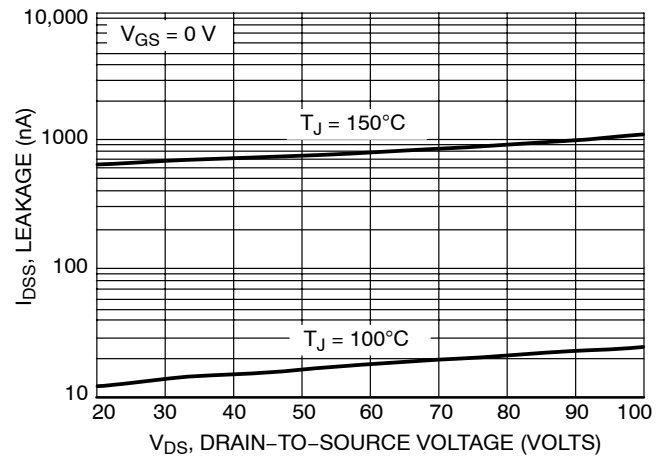


Figure 6. Drain-to-Source Leakage Current versus Voltage

## POWER MOSFET SWITCHING

Switching behavior is most easily modeled and predicted by recognizing that the power MOSFET is charge controlled. The lengths of various switching intervals ( $\Delta t$ ) are determined by how fast the FET input capacitance can be charged by current from the generator.

The published capacitance data is difficult to use for calculating rise and fall because drain–gate capacitance varies greatly with applied voltage. Accordingly, gate charge data is used. In most cases, a satisfactory estimate of average input current ( $I_{G(AV)}$ ) can be made from a rudimentary analysis of the drive circuit so that

$$t = Q/I_{G(AV)}$$

During the rise and fall time interval when switching a resistive load,  $V_{GS}$  remains virtually constant at a level known as the plateau voltage,  $V_{GSP}$ . Therefore, rise and fall times may be approximated by the following:

$$t_r = Q_2 \times R_G / (V_{GG} - V_{GSP})$$

$$t_f = Q_2 \times R_G / V_{GSP}$$

where

$V_{GG}$  = the gate drive voltage, which varies from zero to  $V_{GG}$

$R_G$  = the gate drive resistance

and  $Q_2$  and  $V_{GSP}$  are read from the gate charge curve.

During the turn–on and turn–off delay times, gate current is not constant. The simplest calculation uses appropriate values from the capacitance curves in a standard equation for voltage change in an RC network. The equations are:

$$t_{d(on)} = R_G C_{iss} \ln [V_{GG}/(V_{GG} - V_{GSP})]$$

$$t_{d(off)} = R_G C_{iss} \ln (V_{GG}/V_{GSP})$$

The capacitance ( $C_{iss}$ ) is read from the capacitance curve at a voltage corresponding to the off–state condition when calculating  $t_{d(on)}$  and is read at a voltage corresponding to the on–state when calculating  $t_{d(off)}$ .

At high switching speeds, parasitic circuit elements complicate the analysis. The inductance of the MOSFET source lead, inside the package and in the circuit wiring which is common to both the drain and gate current paths, produces a voltage at the source which reduces the gate drive current. The voltage is determined by  $L di/dt$ , but since  $di/dt$  is a function of drain current, the mathematical solution is complex. The MOSFET output capacitance also complicates the mathematics. And finally, MOSFETs have finite internal gate resistance which effectively adds to the resistance of the driving source, but the internal resistance is difficult to measure and, consequently, is not specified.

The resistive switching time variation versus gate resistance (Figure 9) shows how typical switching performance is affected by the parasitic circuit elements. If the parasitics were not present, the slope of the curves would maintain a value of unity regardless of the switching speed. The circuit used to obtain the data is constructed to minimize common inductance in the drain and gate circuit loops and is believed readily achievable with board mounted components. Most power electronic loads are inductive; the data in the figure is taken with a resistive load, which approximates an optimally snubbed inductive load. Power MOSFETs may be safely operated into an inductive load; however, snubbing reduces switching losses.

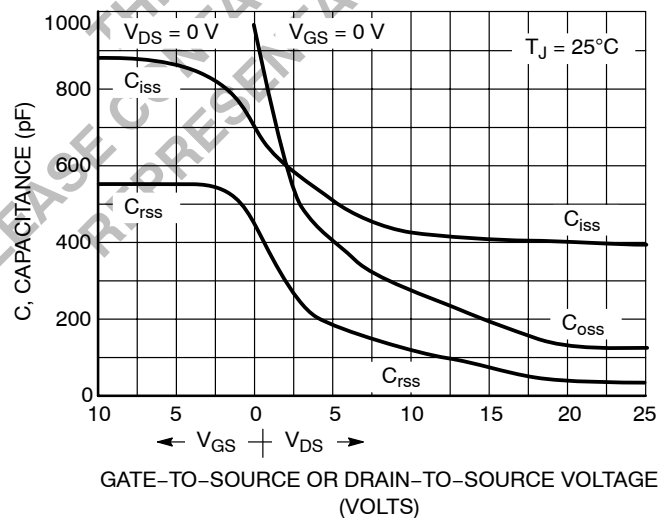


Figure 7. Capacitance Variation

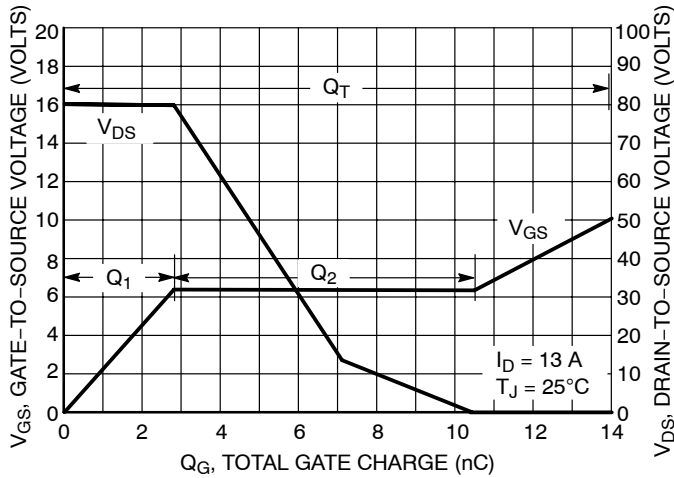


Figure 8. Gate-To-Source and Drain-To-Source Voltage versus Total Charge

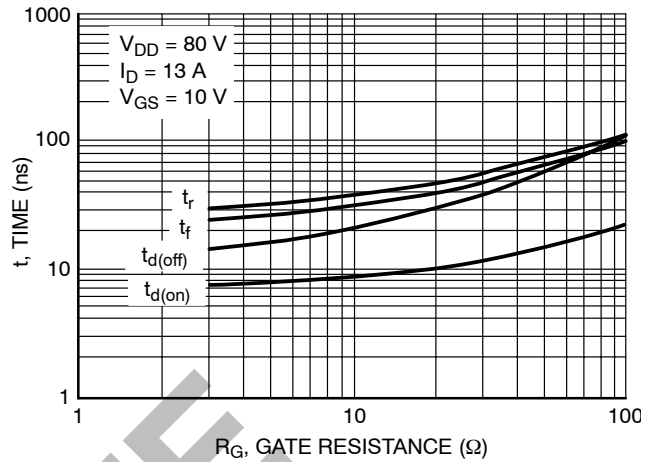


Figure 9. Resistive Switching Time Variation versus Gate Resistance

#### DRAIN-TO-SOURCE DIODE CHARACTERISTICS

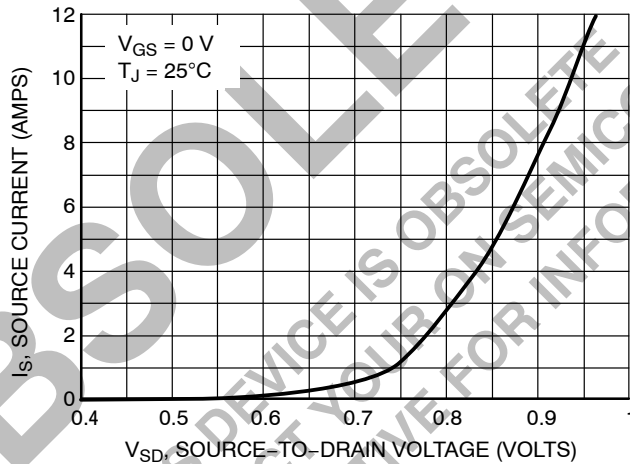


Figure 10. Diode Forward Voltage versus Current

#### SAFE OPERATING AREA

The Forward Biased Safe Operating Area curves define the maximum simultaneous drain-to-source voltage and drain current that a transistor can handle safely when it is forward biased. Curves are based upon maximum peak junction temperature and a case temperature ( $T_C$ ) of 25°C. Peak repetitive pulsed power limits are determined by using the thermal response data in conjunction with the procedures discussed in AN569, "Transient Thermal Resistance-General Data and Its Use."

Switching between the off-state and the on-state may traverse any load line provided neither rated peak current ( $I_{DM}$ ) nor rated voltage ( $V_{DSS}$ ) is exceeded and the transition time ( $t_r, t_f$ ) do not exceed 10  $\mu$ s. In addition the total power averaged over a complete switching cycle must not exceed  $(T_{J(MAX)} - T_C)/(R_{\theta JC})$ .

A Power MOSFET designated E-FET can be safely used in switching circuits with unclamped inductive loads. For

reliable operation, the stored energy from circuit inductance dissipated in the transistor while in avalanche must be less than the rated limit and adjusted for operating conditions differing from those specified. Although industry practice is to rate in terms of energy, avalanche energy capability is not a constant. The energy rating decreases non-linearly with an increase of peak current in avalanche and peak junction temperature.

Although many E-FETs can withstand the stress of drain-to-source avalanche at currents up to rated pulsed current ( $I_{DM}$ ), the energy rating is specified at rated continuous current ( $I_D$ ), in accordance with industry custom. The energy rating must be derated for temperature as shown in the accompanying graph (Figure 12). Maximum energy at currents below rated continuous  $I_D$  can safely be assumed to equal the values indicated.

SAFE OPERATING AREA

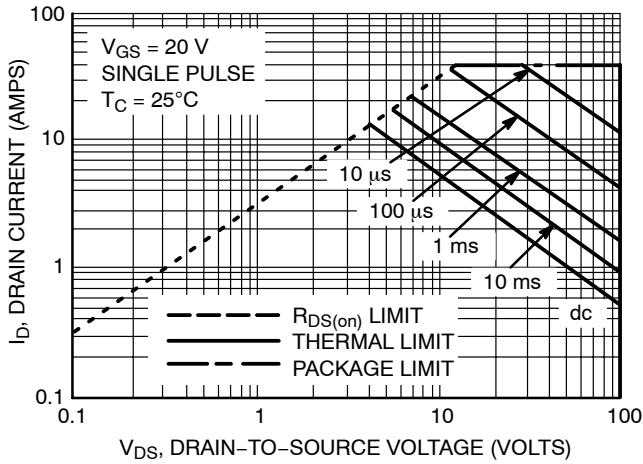


Figure 11. Maximum Rated Forward Biased Safe Operating Area

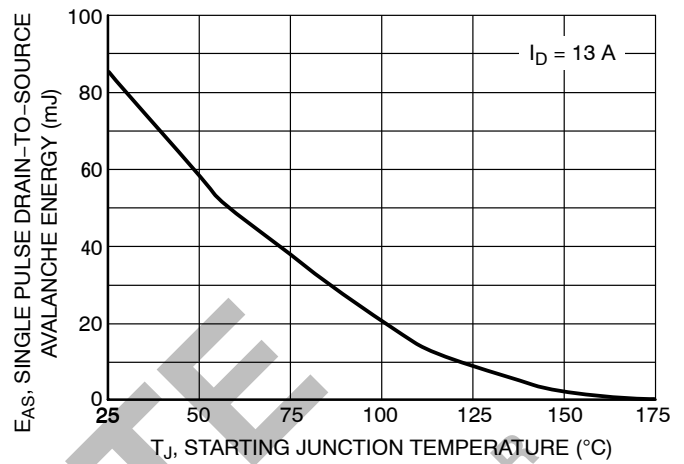


Figure 12. Maximum Avalanche Energy versus Starting Junction Temperature

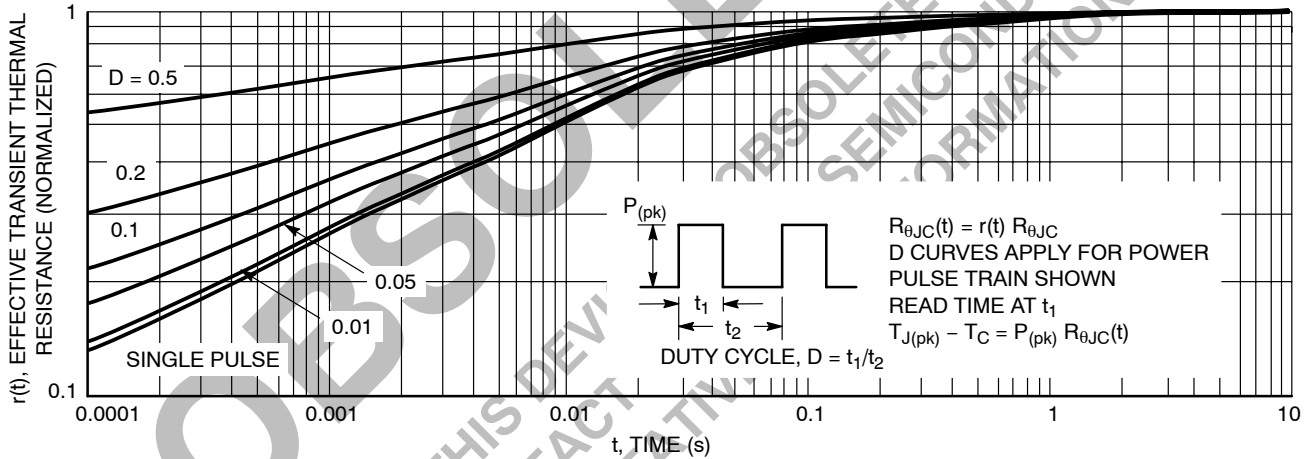


Figure 13. Thermal Response

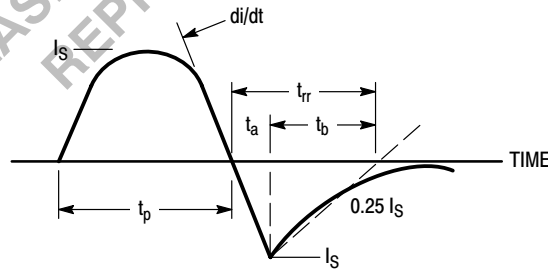


Figure 14. Diode Reverse Recovery Waveform

# NTP13N10


## PACKAGE DIMENSIONS

TO-220 THREE-LEAD

TO-220AB

CASE 221A-09

ISSUE AA

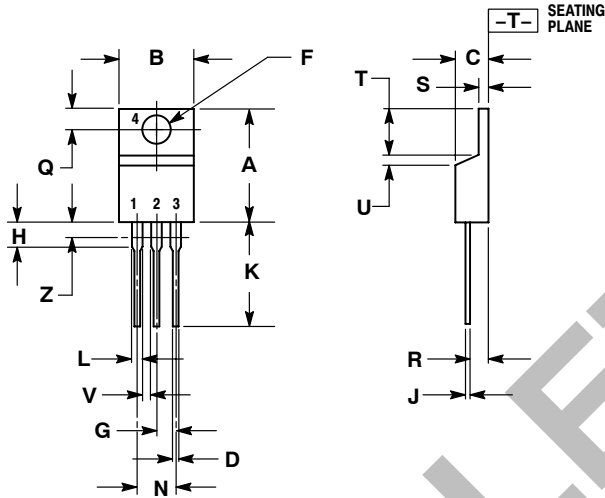

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.570  | 0.620 | 14.48       | 15.75 |
| B   | 0.380  | 0.405 | 9.66        | 10.28 |
| C   | 0.160  | 0.190 | 4.07        | 4.82  |
| D   | 0.025  | 0.035 | 0.64        | 0.88  |
| F   | 0.142  | 0.147 | 3.61        | 3.73  |
| G   | 0.095  | 0.105 | 2.42        | 2.66  |
| H   | 0.110  | 0.155 | 2.80        | 3.93  |
| J   | 0.018  | 0.025 | 0.46        | 0.64  |
| K   | 0.500  | 0.562 | 12.70       | 14.27 |
| L   | 0.045  | 0.060 | 1.15        | 1.52  |
| N   | 0.190  | 0.210 | 4.89        | 5.33  |
| Q   | 0.100  | 0.120 | 2.54        | 3.04  |
| R   | 0.080  | 0.110 | 2.04        | 2.79  |
| S   | 0.045  | 0.055 | 1.15        | 1.39  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | ---   | 1.15        | ---   |
| Z   | ---    | 0.080 | ---         | 2.04  |

### STYLE 5:

- PIN 1: GATE  
2. DRAIN  
3. SOURCE  
4. DRAIN

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

NTP13N10/D