

4


3

2

1


LOC	DIST	REVISIONS				
CE	16	P	LTR	DESCRIPTION	DATE	OWN
			C	REVISED PER ECR-05-015300	10NOV05	KH
						JD

1. INSERTION LOSS: LC <= 0.3dB
SC <= 0.5dB.
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS
OF TYCO ELECTRONICS STANDARD 230-702.

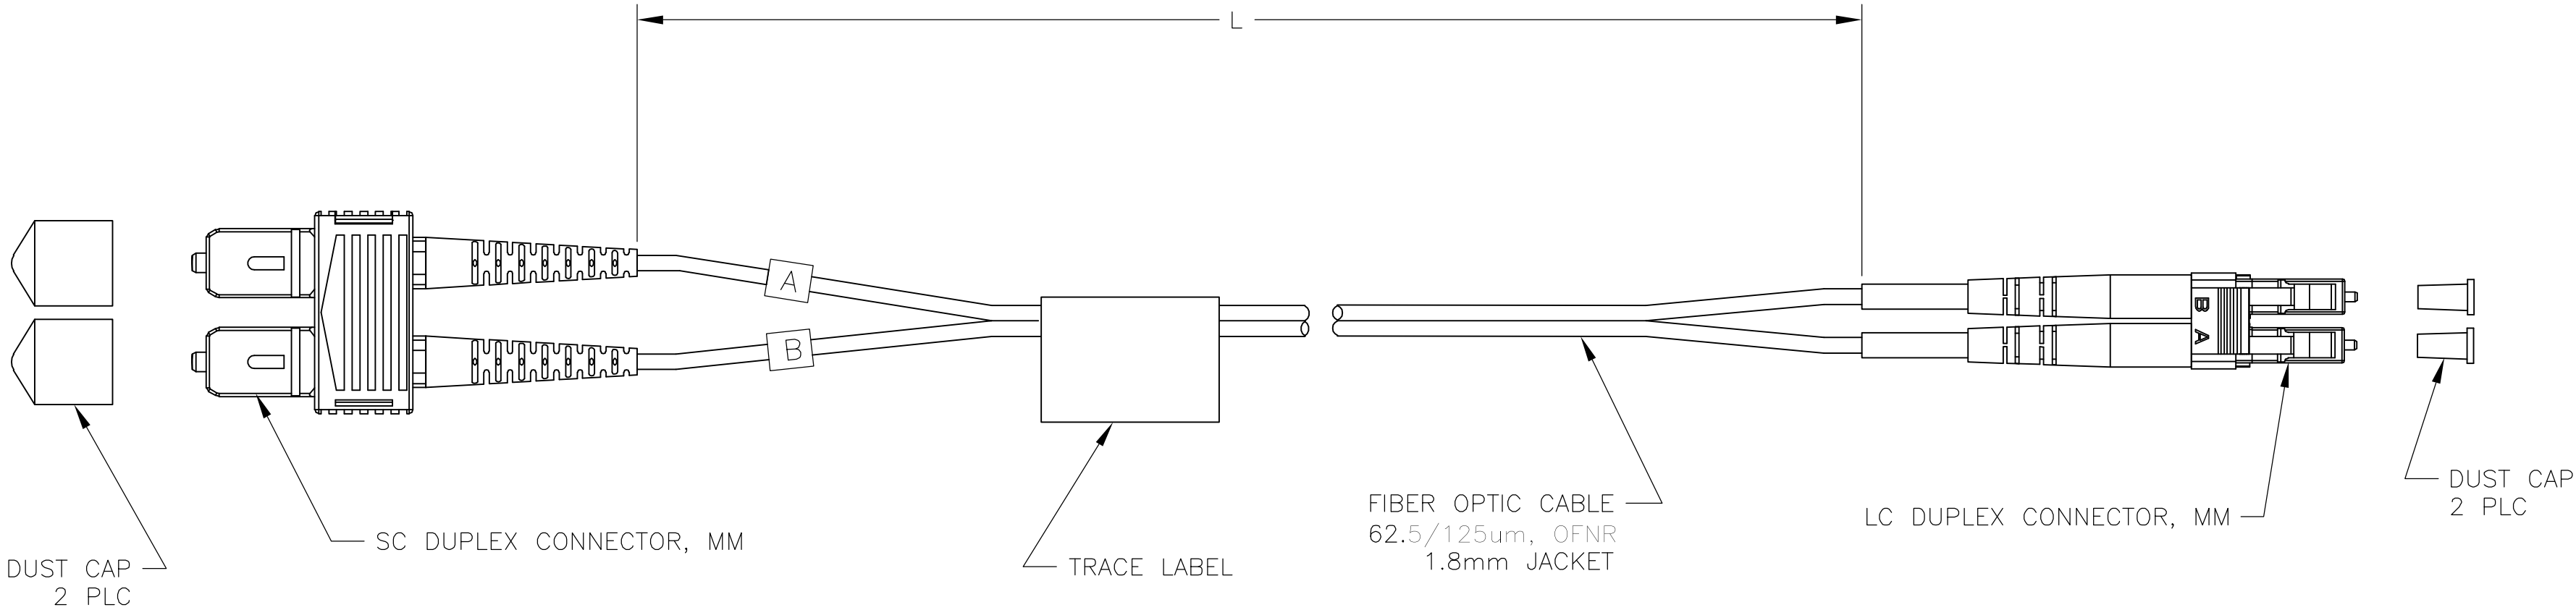


PORT 1

PORT 2

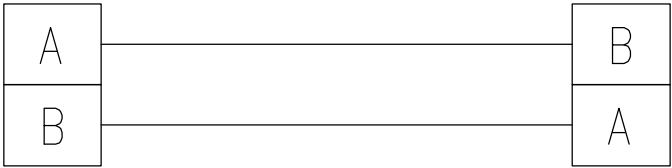

14.85-15.15 [584.65-596.46]	1-1754799-5
9.85-10.15 [387.80-399.61]	1-1754799-0
4.85-5.15 [190.94-202.76]	1754799-5
2.85-3.15 [112.20-124.02]	1754799-3
1.85-2.15 [72.83-84.65]	1754799-2
0.85-1.15 [33.46-45.28]	1754799-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS	27SEP04	tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK J.DUNCAN	27SEP04				
DIMENSIONS: METERS [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL	NAME		
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± ± - FINISH		PRODUCT SPEC	CABLE ASSEMBLY, FIBER OPTIC, 62.5/125um, OFNR 1.8mm CABLE, SC DUPLEX TO LC DUPLEX -		
				APPLICATION SPEC			
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		-		A2	00779	C-1754799	-
CUSTOMER DRAWING					SCALE	NTS	SHEET 1 OF 1
					REV	C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity Divested:](#)

[2-1906048-0](#)