

## LM71/LM71-Q1 SPI/MICROWIRE 13-Bit Plus Sign Temperature Sensor

### 1 Features

- LM71Q is AEC-Q100 Grade 0 Qualified and is Manufactured on an Automotive Grade Flow
- 5-Pin SOT-23 Package or 6-Pin No-Pull-Back WSON Package
- Operates Over a Full  $-40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$  Range
- SPI and MICROWIRE Bus Interface
- Key Specifications:
  - Supply Voltage: 2.65V to 5.5V
  - Supply Current
    - Operating: 300  $\mu\text{A}$  (typ)
    - 550  $\mu\text{A}$  (max)
  - Temperature Accuracy
    - $-10^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$ :  $\pm 1.5^{\circ}\text{C}$  (max)
    - $-40^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ :  $+3/-2^{\circ}\text{C}$  (max)
  - Temperature Resolution: 31.25  $\text{m}^{\circ}\text{C}$

### 2 Applications

- System Thermal Management
- Personal Computers
- Portable Electronic Devices
- Disk Drives
- Office Electronics
- Electronic Test Equipment
- Vending Machines
- Automotive


### 3 Description

The LM71 is a low-power, high-resolution digital temperature sensor with an SPI and MICROWIRE compatible interface, available in the 5-pin SOT-23 or the 6-pin WSON (no pull back) package. The host can query the LM71 at any time to read temperature. Its low operating current is useful in systems where low power consumption is critical.

The LM71 has 13-bit plus sign temperature resolution (0.03125 $^{\circ}\text{C}$  per LSB) while operating over a temperature range of  $-40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ .

The LM71's 2.65V to 5.5V supply voltage range, fast conversion rate, low supply current, and simple SPI interface make it ideal for a wide range of applications. The LM71Q is available in the 5-lead SOT-23 package only.

**Simplified Block Diagram**

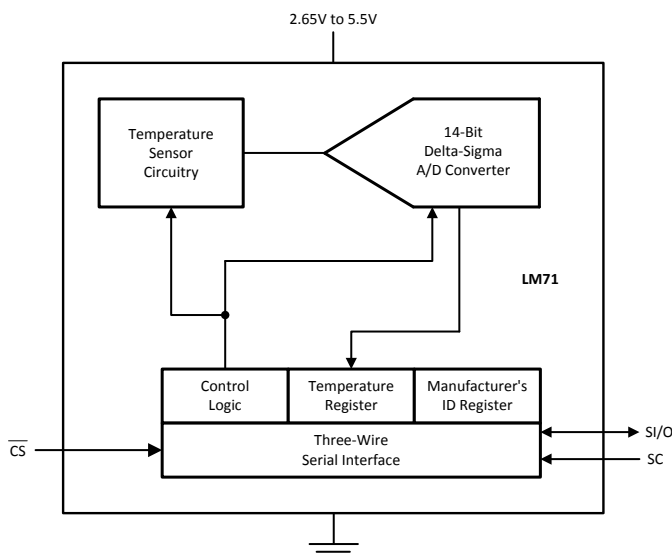

## LM71, LM71-Q1

SNIS125E – MARCH 2004 – REVISED AUGUST 2018

www.ti.com

### 3.1 Connection Diagram

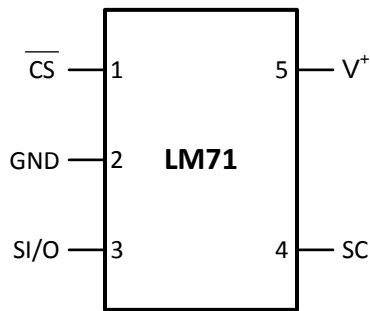


Figure 1. 5-Pin SOT-23  
See Package Number DBV

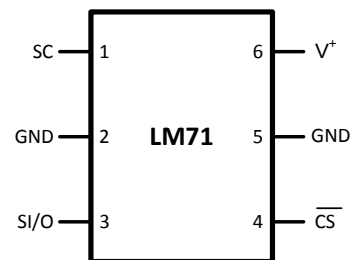


Figure 2. 6-Pin WSON No Pull-Back  
See Package Number NGG0006A

Table 1. PIN DESCRIPTIONS

| Label                  | Pin Number |        | Function                                                                         | Typical Connection                                                                |
|------------------------|------------|--------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                        | SOT-23-5   | WSON-6 |                                                                                  |                                                                                   |
| $\overline{\text{CS}}$ | 1          | 4      | Chip Select input                                                                | From controller                                                                   |
| GND                    | 2          | 2, 5   | Power Supply Ground                                                              | Connect all GND Pins to ground                                                    |
| SI/O                   | 3          | 3      | Slave Input/Output - Serial bus bi-directional data line. Schmitt trigger input. | From and to controller                                                            |
| SC                     | 4          | 1      | Slave Clock - Serial bus clock Schmitt trigger input line                        | From controller                                                                   |
| $\text{V}^+$           | 5          | 6      | Positive Supply Voltage Input                                                    | DC voltage from 2.65V to 5.5V. Bypass with a 0.1 $\mu\text{F}$ ceramic capacitor. |

### 3.2 Typical Application

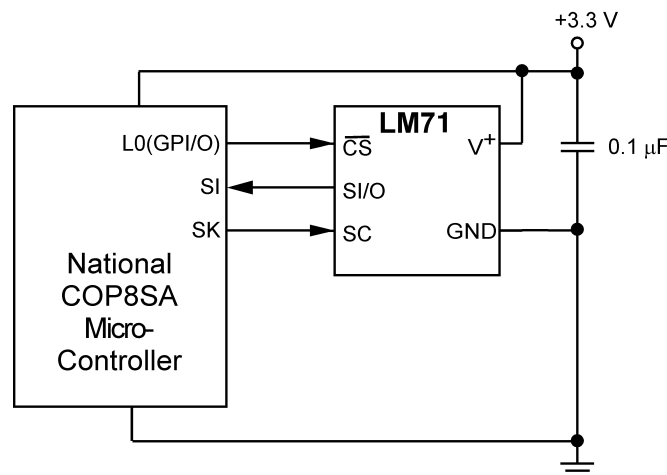


Figure 3. COP Microcontroller Interface

#### 3.1 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

#### 3.2 Trademarks

All trademarks are the property of their respective owners.

## 4 Absolute Maximum Ratings<sup>(1)</sup>

|                                         |                  |                          |                       |
|-----------------------------------------|------------------|--------------------------|-----------------------|
| Supply Voltage                          |                  |                          | –0.3V to 6.0V         |
| Voltage at any Pin                      |                  |                          | –0.3V to $V^+$ + 0.3V |
| Input Current at any Pin <sup>(2)</sup> |                  |                          | 5 mA                  |
| Storage Temperature                     |                  |                          | –65°C to +150°C       |
| Soldering Information, Lead Temperature | SOT-23-5 Package | Vapor Phase (60 seconds) | 215°C                 |
|                                         |                  | Infrared (15 seconds)    | 220°C                 |
|                                         | WSON-6 Package   | Infrared (5 seconds)     | 215°C                 |
| ESD Susceptibility <sup>(3)</sup>       | Human Body Model |                          | 2000V                 |
|                                         | Machine Model    |                          | 200V                  |

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its rated operating conditions.

(2) When the input voltage ( $V_I$ ) at any pin exceeds the power supplies ( $V_I < \text{GND}$  or  $V_I > +V_S$ ) the current at that pin should be limited to 5 mA.

(3) Human body model, 100 pF discharged through a 1.5 k $\Omega$  resistor. Machine model, 200 pF discharged directly into each pin.

## 5 Operating Ratings

|                                                                                     |                               |                 |
|-------------------------------------------------------------------------------------|-------------------------------|-----------------|
| Specified Temperature Range <sup>(1)</sup> ( $T_{\text{MIN}}$ to $T_{\text{MAX}}$ ) | LM71CIMF, LM71CISD, LM71QCIMF | –40°C to +150°C |
| Supply Voltage Range ( $+V_S$ )                                                     | LM71CIMF, LM71CISD, LM71QCIMF | +2.65V to +5.5V |

(1) The life expectancy of the LM71 will be reduced when operating at elevated temperatures. LM71  $\theta_{JA}$  (thermal resistance, junction-to-ambient) when attached to a printed circuit board with 2 oz. foil is summarized in the table below:

| Device Number      | Thermal Resistance ( $\theta_{JA}$ ) |
|--------------------|--------------------------------------|
| LM71CIMF/LM71QCIMF | 250°C/W                              |
| LM71CISD           | 57.6°C/W                             |

## 6 Temperature-to-Digital Converter Characteristics

Unless otherwise noted, these specifications apply for  $V^+ = 2.65V$  to  $3.6V^{(1)}$ . **Boldface limits apply for  $T_A = T_J = T_{MIN}$  to  $T_{MAX}$** ; all other limits  $T_A = T_J = +25^\circ C$ , unless otherwise noted.

| Parameter                           | Conditions                            | Typical <sup>(2)</sup> | LM71CIMF<br>LM71CISD<br>Limits <sup>(3)</sup> | Units<br>(Limit)   |
|-------------------------------------|---------------------------------------|------------------------|-----------------------------------------------|--------------------|
| Temperature Error <sup>(1)(4)</sup> | $T_A = -10^\circ C$ to $+65^\circ C$  |                        | <b><math>\pm 1.5</math></b>                   | $^\circ C$ (max)   |
|                                     | $T_A = -40^\circ C$ to $+85^\circ C$  |                        | <b><math>\pm 2.0</math></b>                   | $^\circ C$ (max)   |
|                                     | $T_A = -40^\circ C$ to $+150^\circ C$ |                        | <b><math>+3/-2</math></b>                     | $^\circ C$ (max)   |
| Resolution                          |                                       | 14<br>0.03125          |                                               | Bits<br>$^\circ C$ |
| Temperature Conversion Time         | See <sup>(5)</sup>                    | 200                    | <b>270</b>                                    | ms (max)           |
| Quiescent Current                   | Serial Bus Inactive                   | 300                    | <b>550</b>                                    | $\mu A$ (max)      |

- (1) The LM71 will operate properly over the  $V^+$  supply voltage range of 2.65V to 5.5V.
- (2) Typicals are at  $T_A = 25^\circ C$  and represent most likely parametric norm.
- (3) Limits are ensured to AOQL (Average Outgoing Quality Level).
- (4) For best accuracy, minimize output loading. Higher sink currents can affect sensor accuracy with internal heating. This can cause an error of  $0.64^\circ C$  at full rated sink current and saturation voltage based on junction-to-ambient thermal resistance.
- (5) Following a power on reset, the user must allow at least 270 ms before making the first read transaction to ensure a first valid temperature read. After the first read, in order to ensure an accurate temperature result, the time interval between any two consecutive temperature reads must be greater than the maximum conversion time of 270 ms. For more information, refer to [SNLA296](#).

## 7 Logic Electrical Characteristics

### DIGITAL DC CHARACTERISTICS

Unless otherwise noted, these specifications apply for  $V^+ = 2.65V$  to  $3.6V^{(1)}$ . **Boldface limits apply for  $T_A = T_J = T_{MIN}$  to  $T_{MAX}$** ; all other limits  $T_A = T_J = +25^\circ C$ , unless otherwise noted.

| Symbol             | Parameter                        | Conditions             | Typical <sup>(2)</sup> | Limits <sup>(3)</sup>              | Units (Limit) |
|--------------------|----------------------------------|------------------------|------------------------|------------------------------------|---------------|
| $V_{IN(1)}$        | Logical "1" Input Voltage        |                        |                        | <b><math>V^+ \times 0.7</math></b> | V (min)       |
|                    |                                  |                        |                        | <b><math>V^+ + 0.3</math></b>      | V (max)       |
| $V_{IN(0)}$        | Logical "0" Input Voltage        |                        |                        | <b><math>-0.3</math></b>           | V (min)       |
|                    |                                  |                        |                        | <b><math>V^+ \times 0.3</math></b> | V (max)       |
|                    | Input Hysteresis Voltage         | $V^+ = 3.0V$ to $3.6V$ | 0.4                    | <b>0.33</b>                        | V (min)       |
| $I_{IN(1)}$        | Logical "1" Input Current        | $V_{IN} = V^+$         | 0.005                  | <b>3.0</b>                         | $\mu A$ (max) |
| $I_{IN(0)}$        | Logical "0" Input Current        | $V_{IN} = 0V$          | -0.005                 | <b>-3.0</b>                        | $\mu A$ (min) |
| $C_{IN}$           | All Digital Inputs               |                        | 20                     |                                    | pF            |
| $V_{OH}$           | High Level Output Voltage        | $I_{OH} = -400 \mu A$  |                        | <b>2.4</b>                         | V (min)       |
| $V_{OL}$           | Low Level Output Voltage         | $I_{OL} = +2 mA$       |                        | <b>0.4</b>                         | V (max)       |
| $I_{O\_TRI-STATE}$ | TRI-STATE Output Leakage Current | $V_O = GND$            |                        | <b>-1</b>                          | $\mu A$ (min) |
|                    |                                  | $V_O = V^+$            |                        | <b>+1</b>                          | $\mu A$ (max) |


- (1) The LM71 will operate properly over the  $V^+$  supply voltage range of 2.65V to 5.5V.
- (2) Typicals are at  $T_A = 25^\circ C$  and represent most likely parametric norm.
- (3) Limits are ensured to AOQL (Average Outgoing Quality Level).

**SERIAL BUS DIGITAL SWITCHING CHARACTERISTICS**


Unless otherwise noted, these specifications apply for  $V^+ = 2.65\text{V}$  to  $3.6\text{V}^{(1)}$ ;  $C_L$  (load capacitance) on output lines = 100 pF unless otherwise specified. **Boldface limits apply for  $T_A = T_J = T_{\text{MIN}}$  to  $T_{\text{MAX}}$** ; all other limits  $T_A = T_J = +25^\circ\text{C}$ , unless otherwise noted.

| Symbol | Parameter                                                 | Conditions | Typical <sup>(2)</sup> | Limits <sup>(3)</sup> | Units (Limit)                |
|--------|-----------------------------------------------------------|------------|------------------------|-----------------------|------------------------------|
| $t_1$  | SC (Clock) Period                                         |            |                        | <b>0.16</b><br>DC     | $\mu\text{s}$ (min)<br>(max) |
| $t_2$  | $\overline{\text{CS}}$ Low to SC (Clock) High Set-Up Time |            |                        | <b>100</b>            | ns (min)                     |
| $t_3$  | $\overline{\text{CS}}$ Low to Data Out (SO) Delay         |            |                        | <b>70</b>             | ns (max)                     |
| $t_4$  | SC (Clock) Low to Data Out (SO) Delay                     |            |                        | <b>70</b>             | ns (max)                     |
| $t_5$  | $\overline{\text{CS}}$ High to Data Out (SO) TRI-STATE    |            |                        | <b>200</b>            | ns (max)                     |
| $t_6$  | SC (Clock) High to Data In (SI) Hold Time                 |            |                        | <b>50</b>             | ns (min)                     |
| $t_7$  | Data In (SI) Set-Up Time to SC (Clock) High               |            |                        | <b>30</b>             | ns (min)                     |
| $t_r$  | SC (Clock) Rise Time                                      |            |                        | <b>100</b>            | ns (max)                     |
| $t_f$  | SC (Clock) Fall Time                                      |            |                        | <b>100</b>            | ns (max)                     |

- (1) The LM71 will operate properly over the  $V^+$  supply voltage range of 2.65V to 5.5V.  
 (2) Typicals are at  $T_A = 25^\circ\text{C}$  and represent most likely parametric norm.  
 (3) Limits are ensured to AOQL (Average Outgoing Quality Level).

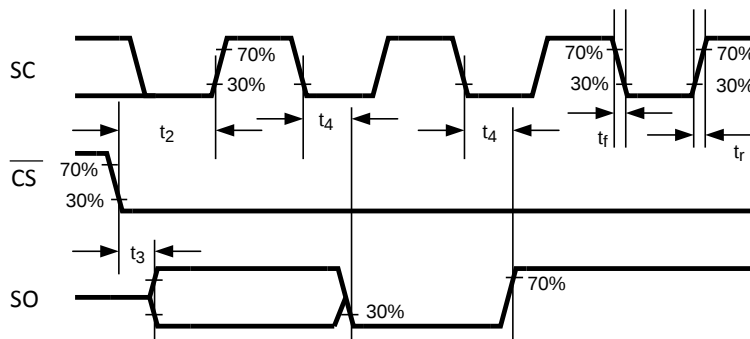


**Figure 4. Data Output Timing Diagram**

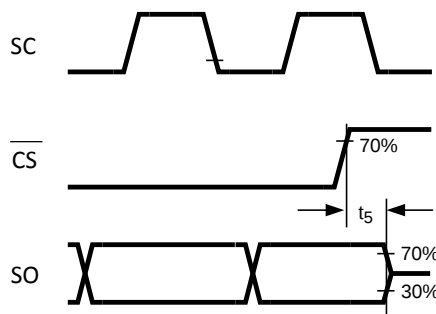


**Figure 5. TRI-STATE Data Output Timing Diagram**

### Figure 6. Data Input Timing Diagram

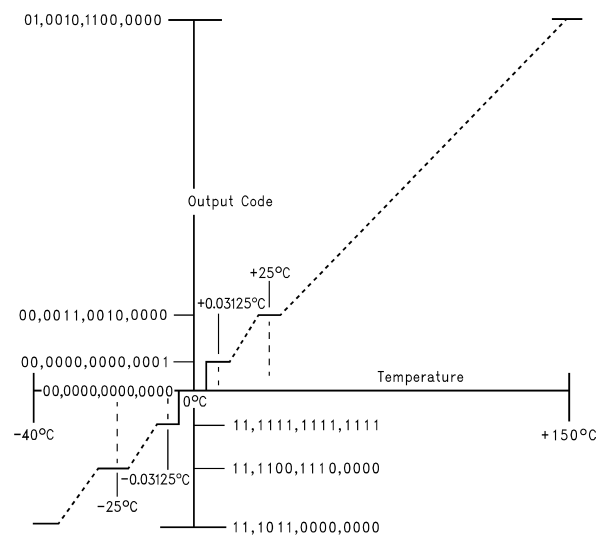


**Figure 7. Temperature-to-Digital Transfer Function (Non-linear scale for clarity)**

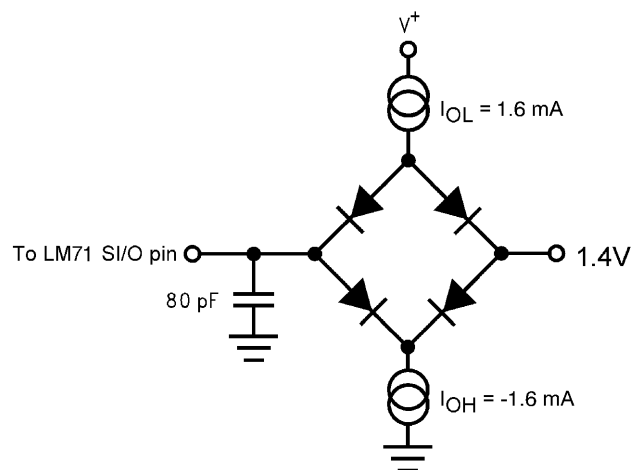


**Figure 8. TRI-STATE Test Circuit**

## 8 Typical Performance Characteristics

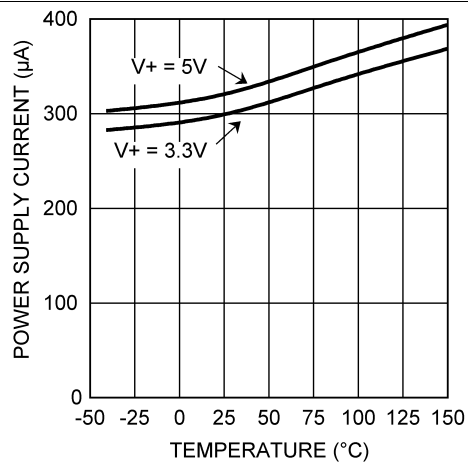

**Figure 9. Static Supply Current vs. Temperature**

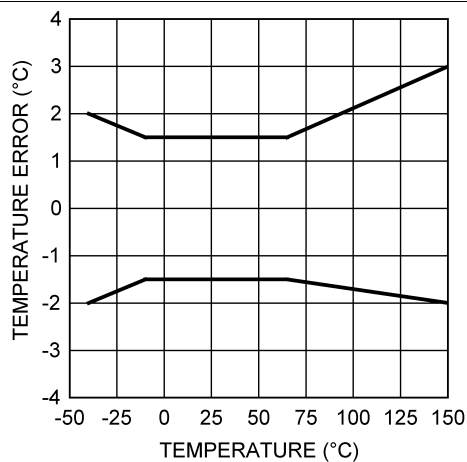

**Figure 10. Temperature Error**

## 9 Functional Description

The LM71 temperature sensor incorporates a temperature sensor and 13-bit plus sign  $\Delta\Sigma$  ADC (Delta-Sigma Analog-to-Digital Converter). Compatibility of the LM71's three wire serial interface with SPI and MICROWIRE allows simple communications with common microcontrollers and processors. Shutdown mode can be used to optimize current drain for different applications. A Manufacture's/Device ID register identifies the LM71 as TI product.

### 9.1 POWER UP AND POWER DOWN

The LM71 always powers up in a known state. The power up default condition is continuous conversion mode. Immediately after power up the LM71 will output an erroneous code until the first temperature conversion has completed.

When the supply voltage is less than about 1.6V (typical), the LM71 is considered powered down. As the supply voltage rises above the nominal 1.6V power up threshold, the internal registers are reset to the power up default state described above.

### 9.2 SERIAL BUS INTERFACE

The LM71 operates as a slave and is compatible with SPI or MICROWIRE bus specifications. Data is clocked out on the falling edge of the serial clock (SC), while data is clocked in on the rising edge of SC. A complete transmit/receive communication will consist of 32 serial clocks. The first 16 clocks comprise the transmit phase of communication, while the second 16 clocks are the receive phase.

When  $\overline{CS}$  is high SI/O will be in TRI-STATE. Communication should be initiated by taking chip select ( $\overline{CS}$ ) low. This should not be done when SC is changing from a low to high state. Once  $\overline{CS}$  is low the serial I/O pin (SI/O) will transmit the first bit of data. The master can then read this bit with the rising edge of SC. The remainder of the data will be clocked out by the falling edge of SC.  $\overline{CS}$  can be taken high at any time during the transmit phase. If  $\overline{CS}$  is brought low in the middle of a conversion the LM71 will complete the conversion and the output shift register will be updated after  $\overline{CS}$  is brought back high.

The receive phase of a communication starts after 16 SC periods.  $\overline{CS}$  can remain low for 32 SC cycles. The LM71 will read the data available on the SI/O line on the rising edge of the serial clock. Input data is to an 8-bit shift register. The part will detect the last eight bits shifted into the register. The receive phase can last up to 16 SC periods. All ones must be shifted in order to place the part into shutdown. All zeros must be shifted in order to place the LM71 into continuous conversion mode. Only the following codes should be transmitted to the LM71:

- 00 hex for continuous conversion
- FF hex for shutdown

Another code may place the part into a test mode. Test modes are used by TI to thoroughly test the function of the LM71 during production testing. Only eight bits have been defined above since only the last eight transmitted are detected by the LM71, before  $\overline{CS}$  is taken HIGH.

The following communication can be used to determine the Manufacturer's/Device ID and then immediately place the part into continuous conversion mode. With  $\overline{CS}$  continuously low:

- Read 16 bits of temperature data
- Write 16 bits of data commanding shutdown
- Read 16 bits of Manufacture's/Device ID data
- Write 8 to 16 bits of data commanding Conversion Mode
- Take  $\overline{CS}$  HIGH.

Note that 300 ms will have to pass for a conversion to complete before the LM71 actually transmits temperature data.

### 9.3 TEMPERATURE DATA FORMAT

Temperature data is represented by a 14-bit, two's complement word with an LSB (Least Significant Bit) equal to 0.03125°C:

| Temperature | Digital Output      |      |
|-------------|---------------------|------|
|             | Binary              | Hex  |
| +150°C      | 0100 1011 0000 0011 | 4B03 |
| +125°C      | 0011 1110 1000 0011 | 3E83 |
| +25°C       | 0000 1100 1000 0011 | 0C83 |
| +0.03125°C  | 0000 0000 0000 0111 | 0007 |
| 0°C         | 0000 0000 0000 0011 | 0003 |
| -0.03125°C  | 1111 1111 1111 1111 | FFFF |
| -25°C       | 1111 0011 1000 0011 | F383 |
| -40°C       | 1110 1100 0000 0011 | EC03 |

The first data byte is the most significant byte with most significant bit first, permitting only as much data as necessary to be read to determine temperature condition. For instance, if the first four bits of the temperature data indicate an overtemperature condition, the host processor could immediately take action to remedy the excessive temperatures.

### 9.4 SHUTDOWN MODE/MANUFACTURER'S ID

Shutdown mode is enabled by writing XX FF to the LM71 as shown in [Figure 13](#). The serial bus is still active when the LM71 is in shutdown. When in shutdown mode the LM71 always will output 1000 0000 0000 1111. This is the manufacturer's/Device ID information. The first 5-bits of the field (1000 0XXX) are reserved for manufacturer's ID.

### 9.5 INTERNAL REGISTER STRUCTURE

The LM71 has three registers, the temperature register, the configuration register and the manufacturer's/device identification register. The temperature and manufacturer's/device identification registers are read only. The configuration register is write only.

#### 9.5.1 Configuration Register

(Selects shutdown or continuous conversion modes):

**Table 2. (Write Only):**

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7       | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-----|-----|-----|-----|-----|----|----|----------|----|----|----|----|----|----|----|
| X   | X   | X   | X   | X   | X   | X  | X  | Shutdown |    |    |    |    |    |    |    |

D0–D15 set to XX FF hex enables shutdown mode.

D0–D15 set to 00 00 hex sets Continuous conversion mode.

Note: setting D0-D15 to any other values may place the LM70 into a manufacturer's test mode, upon which the LM71 will stop responding as described. These test modes are to be used for TI production testing only. See [SERIAL BUS INTERFACE](#) for a complete discussion.

## 9.5.2 Temperature Register

**Table 3. (Read Only):**

| D15 | D14    | D13    | D12    | D11   | D10   | D9    | D8    | D7    | D6    | D5    | D4    | D3   | D2  | D1 | D0 |
|-----|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|------|-----|----|----|
| MSB | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit1 | LSB | 1  | 1  |

D0–D1: Logic 1 will be output on SI/O.

D2–D15: Temperature Data. One LSB = 0.03125°C. Two's complement format.

## 9.5.3 Manufacturer/Device ID Register




**Table 4. (Read Only):**

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| 1   | 0   | 0   | 0   | 0   | 0   | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  |

D0–D1: Logic 1 will be output on SI/O.

D2–D15: Manufacturer's/Device ID Data. This register is accessed whenever the LM71 is in shutdown mode.

## 9.6 Serial Bus Timing Diagrams

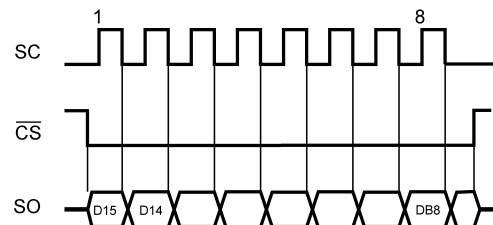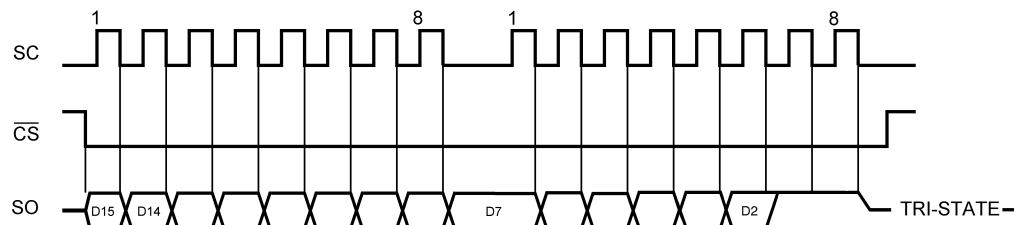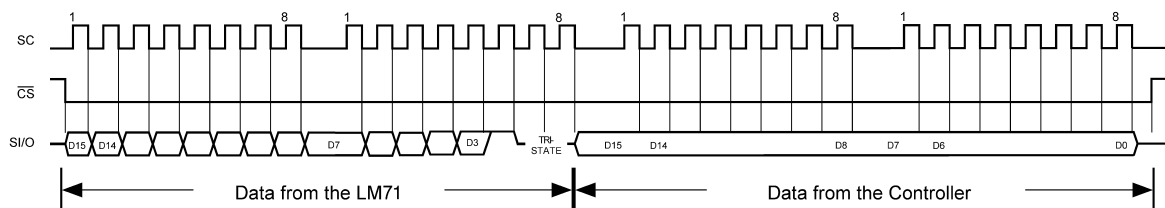
**Figure 11. Reading Continuous Conversion - Single Eight-Bit Frame**

**Figure 12. Reading Continuous Conversion - Two Eight-Bit Frames**

**Figure 13. Writing Shutdown Control**

## 9.7 Application Hints

To get the expected results when measuring temperature with an integrated circuit temperature sensor like the LM71, it is important to understand that the sensor measures its own die temperature. For the LM71, the best thermal path between the die and the outside world is through the LM71's pins. In the SOT-23 package, all the pins on the LM71 will have an equal effect on the die temperature. Because the pins represent a good thermal path to the LM71 die, the LM71 will provide an accurate measurement of the temperature of the printed circuit board on which it is mounted. There is a less efficient thermal path between the plastic package and the LM71 die. If the ambient air temperature is significantly different from the printed circuit board temperature, it will have a small effect on the measured temperature.

In probe-type applications, the LM71 can be mounted inside a sealed-end metal tube, and can then be dipped into a bath or screwed into a threaded hole in a tank. As with any IC, the LM71 and accompanying wiring and circuits must be kept insulated and dry, to avoid leakage and corrosion. This is especially true if the circuit may operate at cold temperatures where condensation can occur. Printed-circuit coatings and varnishes such as Humiseal and epoxy paints or dips are often used to insure that moisture cannot corrode the LM71 or its connections.

## 9.8 Typical Applications

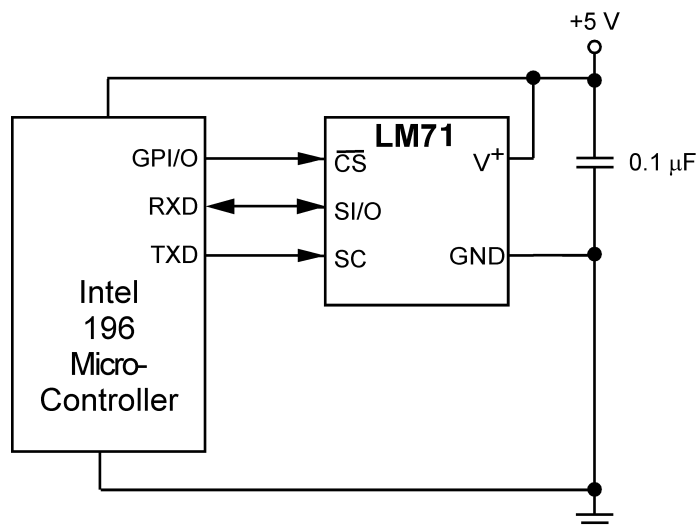


Figure 14. Temperature monitor using Intel 196 processor

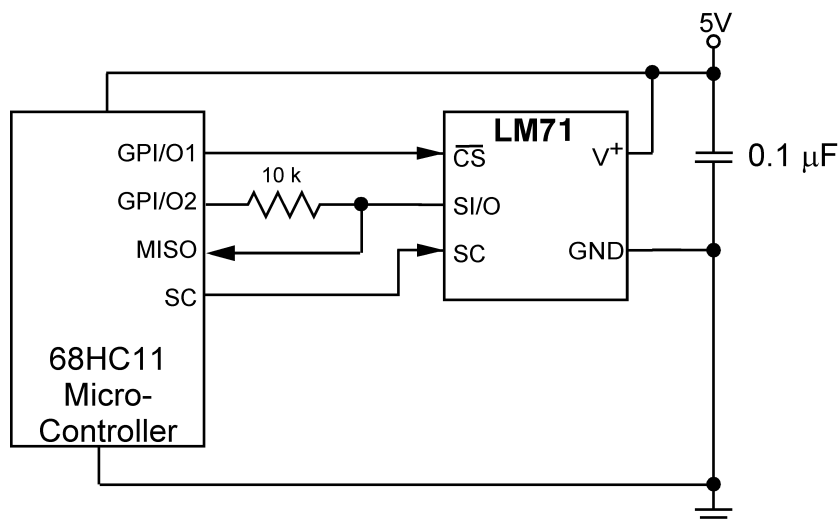


Figure 15. LM71 digital input control using micro-controller's general purpose I/O.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision D (March 2013) to Revision E                                                                       | Page               |
|--------------------------------------------------------------------------------------------------------------------------|--------------------|
| <ul style="list-style-type: none"> <li>Added SNLA296 ulink to the temperature conversion time tablenote.....</li> </ul>  | <a href="#">4</a>  |
| Changes from Revision C (March 2013) to Revision D                                                                       | Page               |
| <ul style="list-style-type: none"> <li>Changed layout of National Semiconductor Data Sheet to TI format .....</li> </ul> | <a href="#">11</a> |

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| LM71CIMF                        | NRND          | Production           | SOT-23 (DBV)   5 | 1000   LARGE T&R      | No          | SNPB                                 | Level-1-260C-UNLIM                | -            | T16C                |
| LM71CIMF.A                      | NRND          | Production           | SOT-23 (DBV)   5 | 1000   LARGE T&R      | No          | SNPB                                 | Level-1-260C-UNLIM                | -40 to 150   | T16C                |
| <a href="#">LM71CIMF/NOPB</a>   | Obsolete      | Production           | SOT-23 (DBV)   5 | -                     | -           | Call TI                              | Call TI                           | -            | T16C                |
| <a href="#">LM71CIMFX/NOPB</a>  | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 150   | T16C                |
| LM71CIMFX/NOPB.A                | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 150   | T16C                |
| <a href="#">LM71CISD/NOPB</a>   | Active        | Production           | WSON (NGG)   6   | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 150   | L71CI               |
| LM71CISD/NOPB.A                 | Active        | Production           | WSON (NGG)   6   | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 150   | L71CI               |
| <a href="#">LM71QCIMF/NOPB</a>  | Obsolete      | Production           | SOT-23 (DBV)   5 | -                     | -           | Call TI                              | Call TI                           | -40 to 150   | T16Q                |
| <a href="#">LM71QCIMFX/NOPB</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 150   | T16Q                |
| LM71QCIMFX/NOPB.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 150   | T16Q                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF LM71, LM71-Q1 :**

- Catalog : [LM71](#)
- Automotive : [LM71-Q1](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


## TAPE AND REEL INFORMATION



\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM71CIMFX/NOPB  | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| LM71CISD/NOPB   | WSO          | NGG             | 6    | 1000 | 177.8              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q1            |
| LM71QCIMFX/NOPB | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS

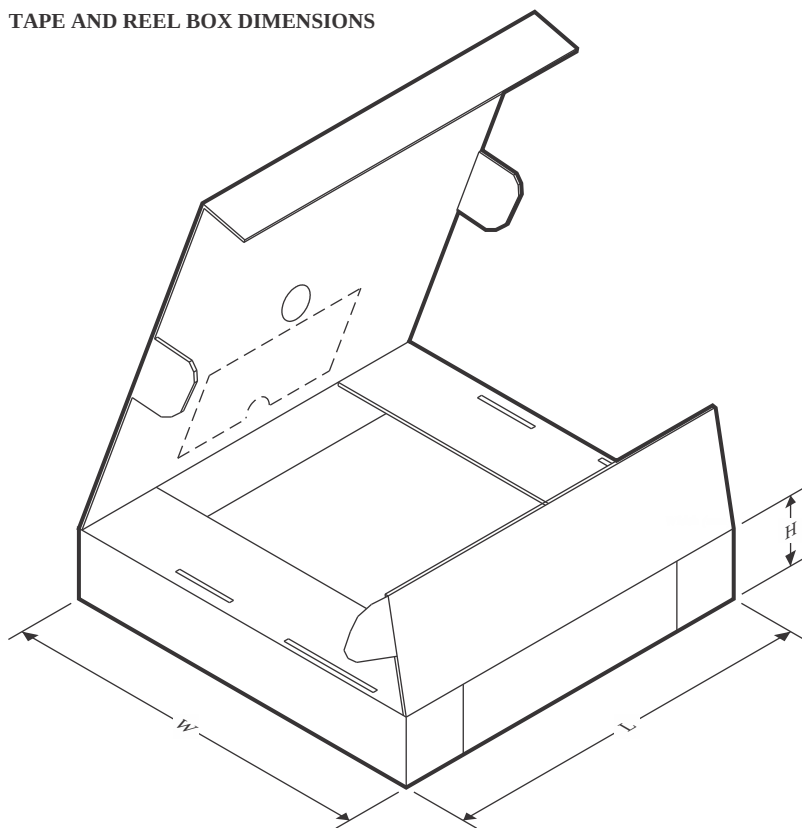

\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM71CIMFX/NOPB  | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| LM71CISD/NOPB   | WSO          | NGG             | 6    | 1000 | 208.0       | 191.0      | 35.0        |
| LM71QCIMFX/NOPB | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |

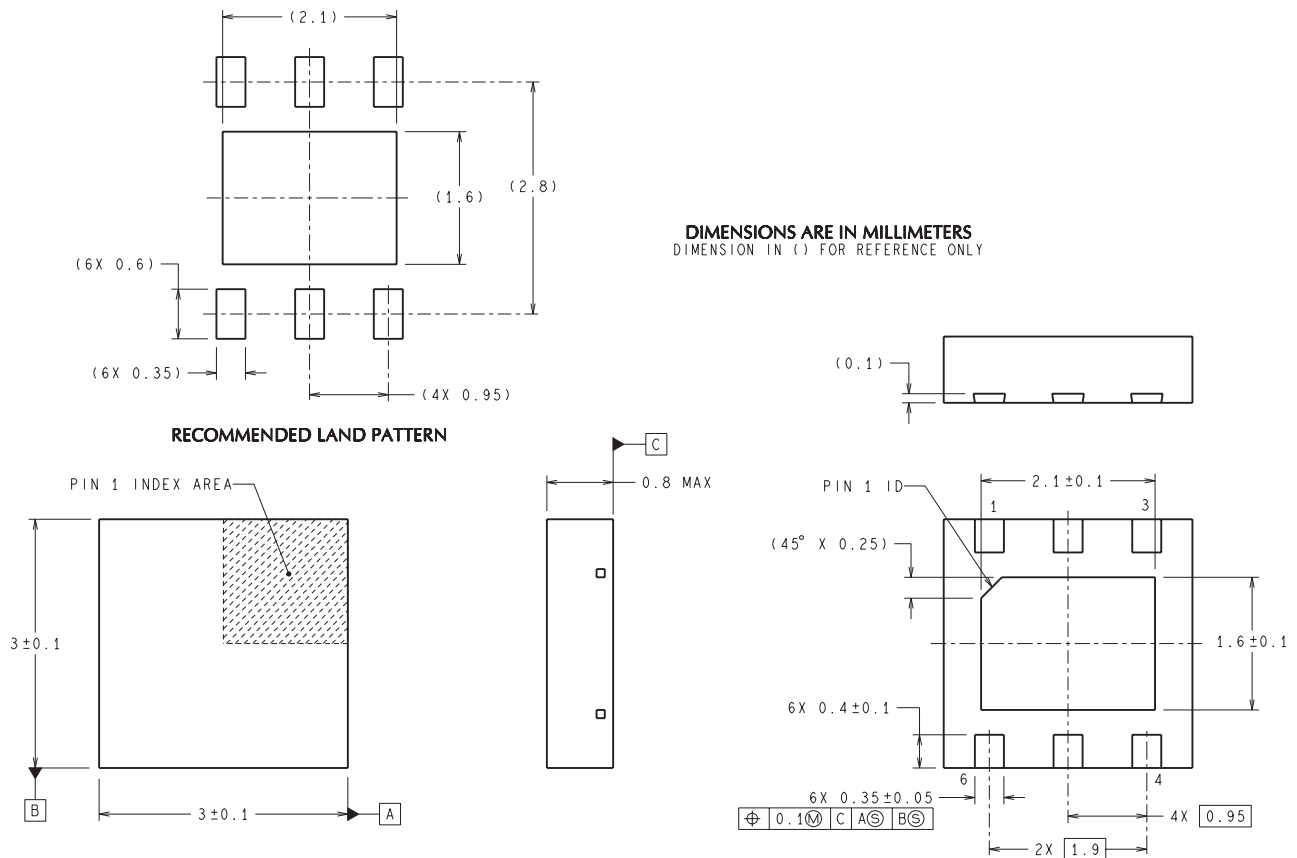

SDE06A (Rev A)

**DBV0005A****PACKAGE OUTLINE****SOT-23 - 1.45 mm max height**

SMALL OUTLINE TRANSISTOR

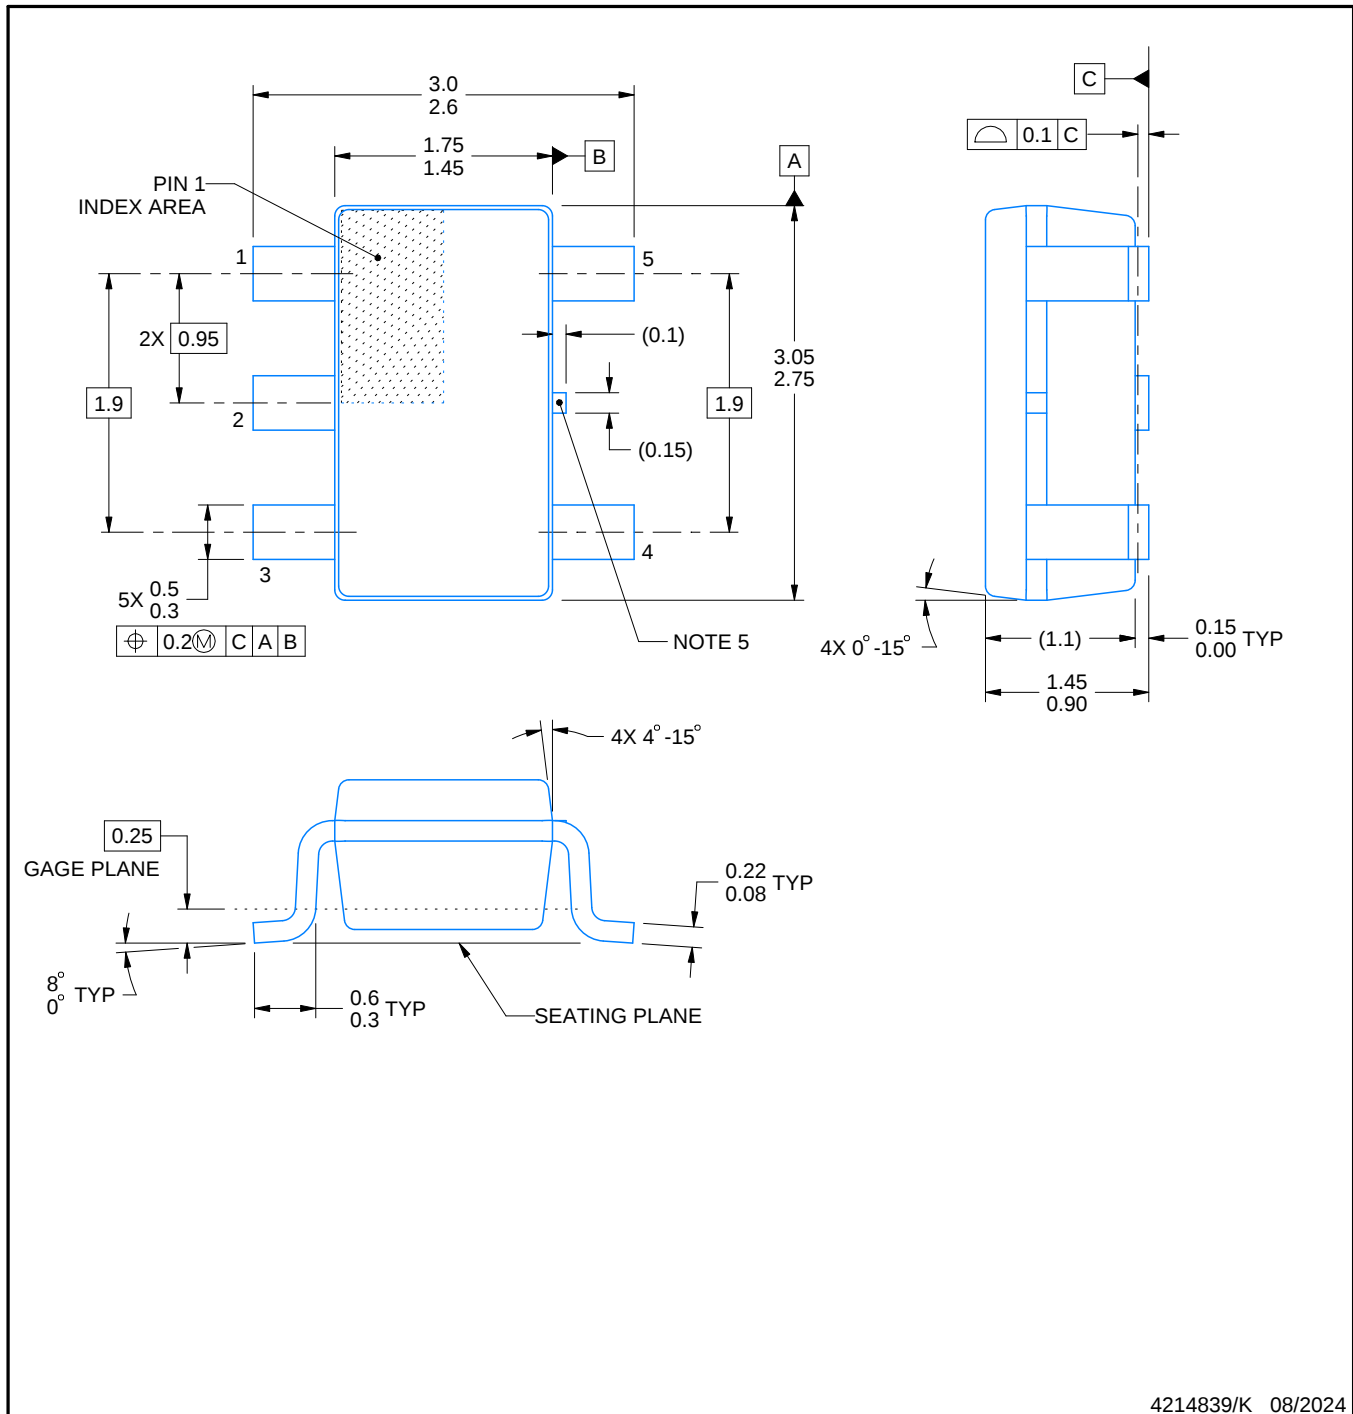

4214839/K 08/2024

**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

# EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

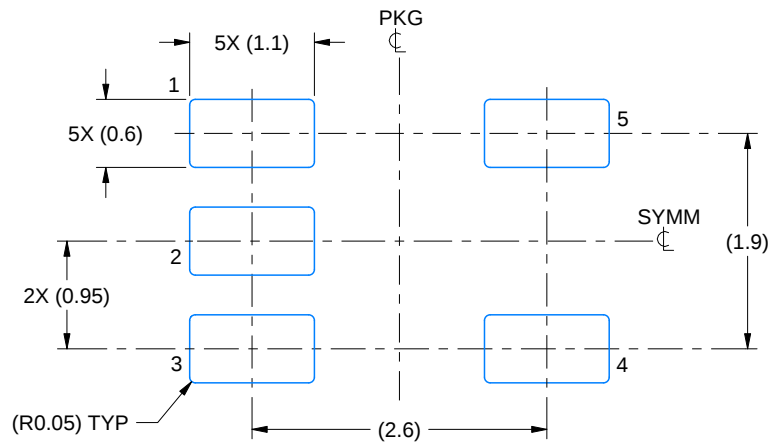

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

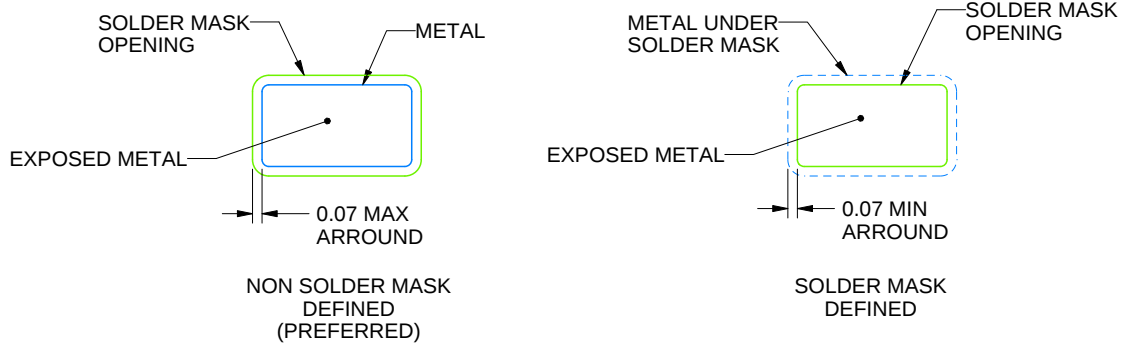

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

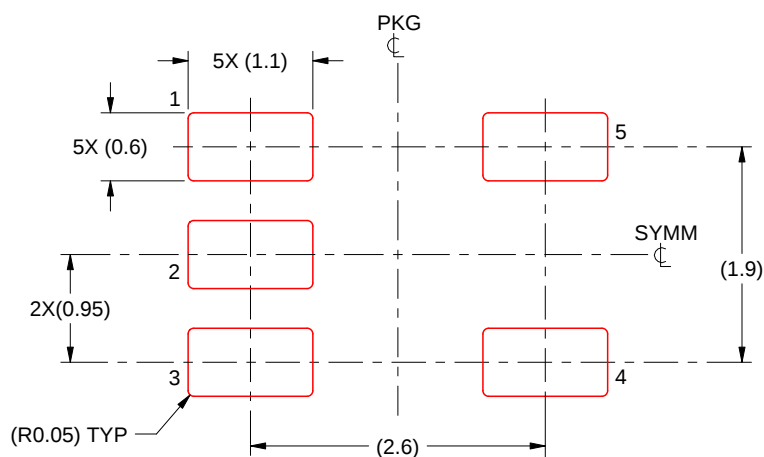

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated