

SEALED, ILLUMINATED ROCKER SWITCHES

K1/K2
SNAP-IN
ROCKERS

LOW COST, SNAP-IN ROCKER FOR WET & DUSTY ENVIRONMENTS

The K series rockers are rugged, high performance sealed switches designed for use under severe conditions found in marine, appliance, heavy equipment and industrial control applications. Sealed to IP68S with an optional panel gasket available.

The K1 series is offered in single pole configuration while the K2 series is available in single and double pole configurations. Both series offer illuminated models. Illumination can be independent or dependent of the switch position or a combination of both. A choice of red, green, clear or amber colored lenses are offered in illuminated models. Illumination options include incandescent, LED or neon light sources.

Mounting is simple and quick; snaps into panel from the front. The OTTO snap-in design supports a variety of panel thicknesses with just one cutout size specified.

A choice of models are offered to handle power levels to 16 amps, 1/2 HP and low level electronic switching applications.

OTTO can provide custom colors upon request. Value-added assemblies with wire leads are also available. Please consult the factory for assistance.

Features:

- Withstands direct water spray
- Watertight to IP68S
- Fits industry standard panel openings for drop-in replacement of panel sealed & unsealed switches
- Snap-in feature accommodates a wide range of panel cutouts
- Switches up to 16 amps
- UV & solvent resistant
- Withstands extreme shock & vibration
- Custom legends available
- 2 & 3-position, momentary & maintained action
- Incandescent, LED & neon illumination with independent & dependent light source options
- UL recognized & CSA certified
- Ignition protected
- RoHS/WEEE/Reach compliant



K1 Series
Single Pole



K2 Series
Single & Double Pole



Standard Characteristics/Ratings:

ELECTRICAL RATINGS:

Load	Sea Level @ 28VDC or 125/250VAC, 60Hz	Cycles
Resistive	16A	25,000
Resistive	10A	50,000
Inductive	10A	25,000
Lamp	5A	25,000
Motor	0.5HP	25,000
DWV	1050Vrms except across light terminals	
Low Level	10mA @ 30mV	

Electrical Life: See Rating Chart

LIGHTING:

Light Source	Rating
Incandescent	(VDC) 6V, 12V, 24V
Neon	(VAC) 125V, 250V
LED	(VDC) 2V, 6V, 12V, 24V

Mechanical Life: 100,000 cycles

Seal: IP68S

Operating Temp Range: -30°C to +85°C

MATERIALS:

Case:	Thermoplastic
Button:	Thermoplastic
Base:	Thermoplastic
Terminals/Contact:	Brass, silver alloy with silver plate, gold flash for low level
Terminal Hardware:	Screws and lockwashers provided when applicable K1/K2 series recommended Quick Connect terminals: AMP 60253-2 for 12-16 AWG AMP 42100-2 for 14-18 AWG
Mounting Hardware:	None provided

LOW COST, SNAP-IN ROCKER FOR WET & DUSTY ENVIRONMENTS

K1 PART NUMBER CODE

K1 -

X

X

X

Part Number Code Continued Below

X

Terminal Style/ Switch Rating

- A. Q.C./Std.
- B. Screw/Std.
- C. Solder/Std.
- D. Q.C./Low Level
- E. Screw/Low Level
- F. Solder/Low Level
- G. PC Pin/Std.
- H. PC Pin/Low Level


Actuator Color/Style

- A. Red/Rocker
- B. Black/Rocker
- C. White/Rocker
- D. Red/Paddle
- E. Black/Paddle
- F. White/Paddle
- G. Red/Rocker Pinned
- H. Black/Rocker Pinned
- J. White/Rocker Pinned
- K. Red/Short Paddle Pinned
- L. Black/Short Paddle Pinned
- M. White/Short Paddle Pinned
- N. Red/Standard Paddle Pinned
- P. Black/Standard Paddle Pinned
- R. White/Standard Paddle Pinned
- T. Red/Short Paddle
- U. Black/Short Paddle
- V. White/Short Paddle

Switch Action/Circuit

	Position "A"	Position "B"	Position "C"	Circuit
A.	1-C	NONE	OFF	SPST
B.	1-C	NONE	2-C	SPDT
C.	(1-C)	NONE	OFF	SPST
D.	(1-C)	NONE	2-C	SPDT
E.	(1-C)	OFF	(2-C)	SPDT
F.	1-C	OFF	2-C	SPDT
G.	(1-C)	OFF	2-C	SPDT
H.	OFF	NONE	2-C	SPST

NOTE: () denotes momentary action.

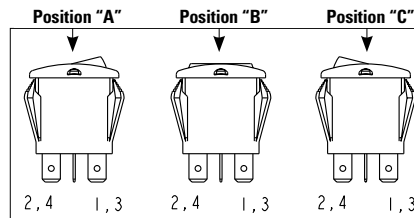

Light Type

- A. No Light
- B. 6V Incandescent
- C. 12V Incandescent
- D. 24V Incandescent
- E. 125VAC Neon
- F. 250VAC Neon
- G. 2V Red LED
- H. 2V Green LED
- J. 2V Amber LED
- K. 6V Red LED
- L. 6V Green LED
- M. 6V Amber LED
- N. 12V Red LED
- P. 12V Green LED
- Q. 12V Amber LED
- R. 24V Red LED
- S. 24V Green LED
- T. 24V Amber LED

K1 PART NUMBER CODE CONTINUED FROM ABOVE

K1 Continued

X

X

X







X

Lens Color

- | Position "A" | Position "C" |
|--------------|--------------|
| A. No Lens | A. No Lens |
| B. Red | B. Red |
| C. Green | C. Green |
| D. Amber | D. Amber |
| E. Clear | E. Clear |

Light/Circuit Location







A. No Light



D = Dependent Light
I = Independent Light

Legend & Orientation

A. None



NOTES:

- No momentary switches with dependent lights.
- Neon lamps only to be coded with clear or amber lenses.
- LED lenses must be clear or same color as LED.
- No dependent light in OFF position.
- All legends printed on actuators without lens(es) will be white except actuator codes C, F, J, M & R.
- All legends printed on lenses will be white except on clear lens(es) will be black.

NOTES:


- LED anode (+) terminal number shown in **bold**.
- Light on OFF side must be independent.
- Contact factory for multiple light types in the same switch.

• K1 panel plugs available as shown on page 160.

SEALED, ILLUMINATED ROCKER SWITCHES


K1
SNAP-IN
ROCKERS

LOW COST, SNAP-IN ROCKER FOR WET & DUSTY ENVIRONMENTS

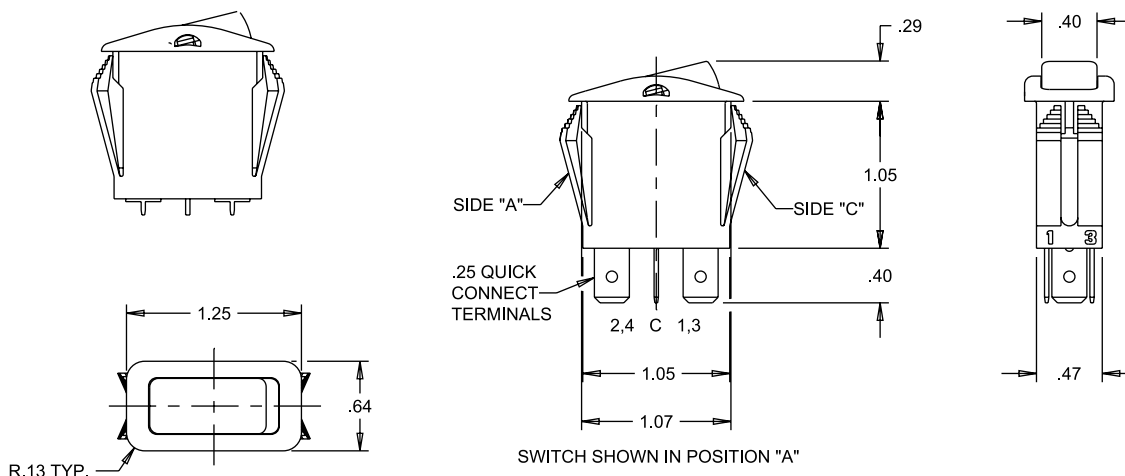

MOUNTING HOLE:
PANEL THICKNESS RANGE OF .025 - .105 A GASKET IS RECOMMENDED,
0.031" THICKNESS = GASKET P/N 807039-2
0.062" THICKNESS = GASKET P/N 807039-1

PANEL THICKNESS RANGE OF .105 - .187 W/O GASKET
PANEL OPENING: MIN. TYP. MAX.
WIDTH .480 .515 .550
LENGTH 1.072 1.099 1.125



P.C. PIN LAYOUT			
2X .63 2X .32 .16 1.16 TYP. .32 RECOMMENDED HOLE SIZE Ø .040			
PADDLE STYLES			
SHORT PADDLE ROCKER	STANDARD PADDLE ROCKER		
.46	.72		
TERMINAL STYLES (.032 THICK)			
SCREW	QUICK CONNECT	SOLDER	P.C. PIN
#6-32 THD .25	Ø .08 .25	Ø .11 .25	.030 .10 .25

SNAP-IN PANEL MOUNTING

Standard Legends Per SAE Specifications

STANDARD LEGENDS PER SAE SPECIFICATIONS					
A1		ANCHOR	K2		UNLOCK
B1		BATTERY	L1		LIGHT
B2		ELECTRIC POWER	L2		MASTER LIGHTING SWITCH
C1		AC/COOLING SYSTEMS	L3		HEADLIGHTS
C2		DEHUMIDIFIER	L4		HEADLIGHTS-LOW / DIPPED BEAM
C3		HEATER/INTERIOR HEATING	L5		HEADLIGHTS-HIGH / UPPER BEAM
D1		WINDSHIELD DEFROSTER	L6		PARKING LIGHT
D2		REAR WINDOW DEFROSTER	L7		WORK LAMP
D3		MIRROR DEFROSTER	L8		WORK LAMP
E1		ENGINE/START	L9		INTERIOR DOME LIGHT
E2		ENGINE/STOP	M1		BEACON
E3		ON/START	M2		HAZARD/POSITION LIGHTS
E4		OFF/STOP	M3		CLEARANCE LIGHTS
E5	ON	ON	M4		SIDE MARKER LIGHT
E6	OFF	OFF	M5		RUNNING LIGHTS (UNDER POWER)
E7		ENGINE ELECTRIC PREHEAT	M6		ANCHOR LIGHT
E8		ENGINE-GAS INJECTION	M7		RUNNING/ANCHOR LIGHTS
F1		FRONT FOG LIGHTS	M8		SEARCH LIGHT
F2		REAR FOG LIGHTS	M9		LEFT TURN SIGNAL
G1		FUEL	MA		RIGHT TURN SIGNAL
H1		HORN	P1		BILGE PUMP #1
H2		HORN REAR	P2		BILGE PUMP #2
K1		LOCK	P3		BILGE PUMP #3
			P4		BILGE PUMP
P5		BILGE BLOWER	R1		LIFT
R2		LOWER	R3		UP
R4		DOWN	R5		RIGHT
R6		LEFT	R7	FWD	FORWARD
R8	REV	REVERSE	S1		RADIO
S2		MUTE	T1		FAST
T2		SLOW	T3		TRIM TAB / TRIMMING OPERATION
T4		TRANSMISSION	V1		VENTILATING / AC FAN
W1		WINDSHIELD WIPER	W2		WINDSHIELD-WASHER
W3		WINDSHIELD-WASHER/WIPER	W4		REAR WINDOW WIPER
W5		REAR WINDOW-WASHER	W6		REAR WINDOW-WASHER/WIPER
ZZ		NO LEGEND			

For legends not shown, please consult an OTTO representative.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

[K2ABMHCADA](#) [K2AABAAAAA](#) [K2ACAAAAAA](#) [K2AABDBCFA](#) [K2ABNFDEFA](#) [K2CBHFDABA](#) [K2ABLNEADA](#)
[K2ABNCBCGA](#) [K2ABNCBDGA](#) [K2ABNCCCFA](#) [K2ABNDDDFFA](#) [K2ABNEDEFA](#) [K2ABHLCADA](#) [K2ABHTEABA](#)
[K2ABJFEABA](#) [K2ABJKEABA](#) [K2ABJQEADA](#) [K2ABJRBABA](#) [K2AARAAAAA](#) [K2ABACCABD](#) [K2ABPCADA](#)
[K2ABFCBBGA](#) [K2ABFNBBJA](#) [K2ABFSCCFA](#) [K2CBFAAAAA](#) [K2CBHAAAAP](#) [K2CBHEEABA](#) [K2CBJNBABA](#)
[K2CCPAAAAA](#) [K2AAJNBADA](#) [K2ACAAAAAR](#) [K2BBHAAAAD](#) [K2BBNDBABA](#) [K2BEEAAAAA](#) [K2CAASCABL](#)
[K2CBAPCABA](#) [K2CBMQEADA](#) [K2FBJA AAAA](#) [K2FEEQEEJA](#) [K2ABNP EEFA](#) [K2ABSQEEHA](#) [K2CAKAAAAP](#)
[K2CBHAAAAA](#) [K2CBHAAAAR](#) [K2CBHFDADP](#) [K2CBHNEABA](#) [K2CBJLEEFA](#) [K2DCBAAAAA](#) [K2CBBA AAAAR](#)
[K2CBHEDABN](#) [K2CBNSCCFA](#) [K2BBNDCDFA](#) [K2BCCAAAAA](#) [K2ABKHCADA](#) [K2ACHEBABA](#) [K2ACHPCABA](#)
[K2ADEAAAAA](#) [K2BBEAAAAA](#) [K2DBAAAAAA](#) [K2ABHFDABA](#) [K2ABHSCABA](#) [K2ABJTDADA](#) [K2ABKAAAAA](#)
[K2ABLAAAAA](#) [K2ABMKEADA](#) [K2ABJC CDGA](#) [K2CCAEEADL](#) [K2AANAAAAA](#) [K2ABBA AAAAR](#) [K2ABEPCADA](#)
[K2ABHDCADA](#) [K2ABAFDABA](#) [K2ABCNEADA](#) [K2ABEQEEFA](#) [K2ABHPCADA](#) [K2ABHPCCDD](#) [K2ABHSEADA](#)
[K2AAJAAAAAR](#) [K2AAAQDABA](#) [K2AAHJDABA](#) [K2AAJCBADA](#) [K2AAMAAAAA](#) [K2ABAEBABA](#) [K2BBLTDADA](#)
[K2BBMPCADA](#) [K2CAACBABB](#) [K2AAJAAAAD](#) [K2ABHPEABA](#) [K2ABHQAE EA](#) [K2ABHSCADR](#) [K2ABJC BDFA](#)
[K2ABNCBDFA](#) [K2ACEAAAAA](#) [K2CBBLCABA](#) [K2CBHEDABA](#) [K2ABANBABA](#) [K2ABEFEEJB](#) [K2ABHAAAAC](#)
[K2CBPAAAAA](#) [K2CEBP EEFA](#)