

D

D

C

C

B

B

A

A

- 1
- NYLON, UL 94-VO RATED, RED.




2

3

4

5

6

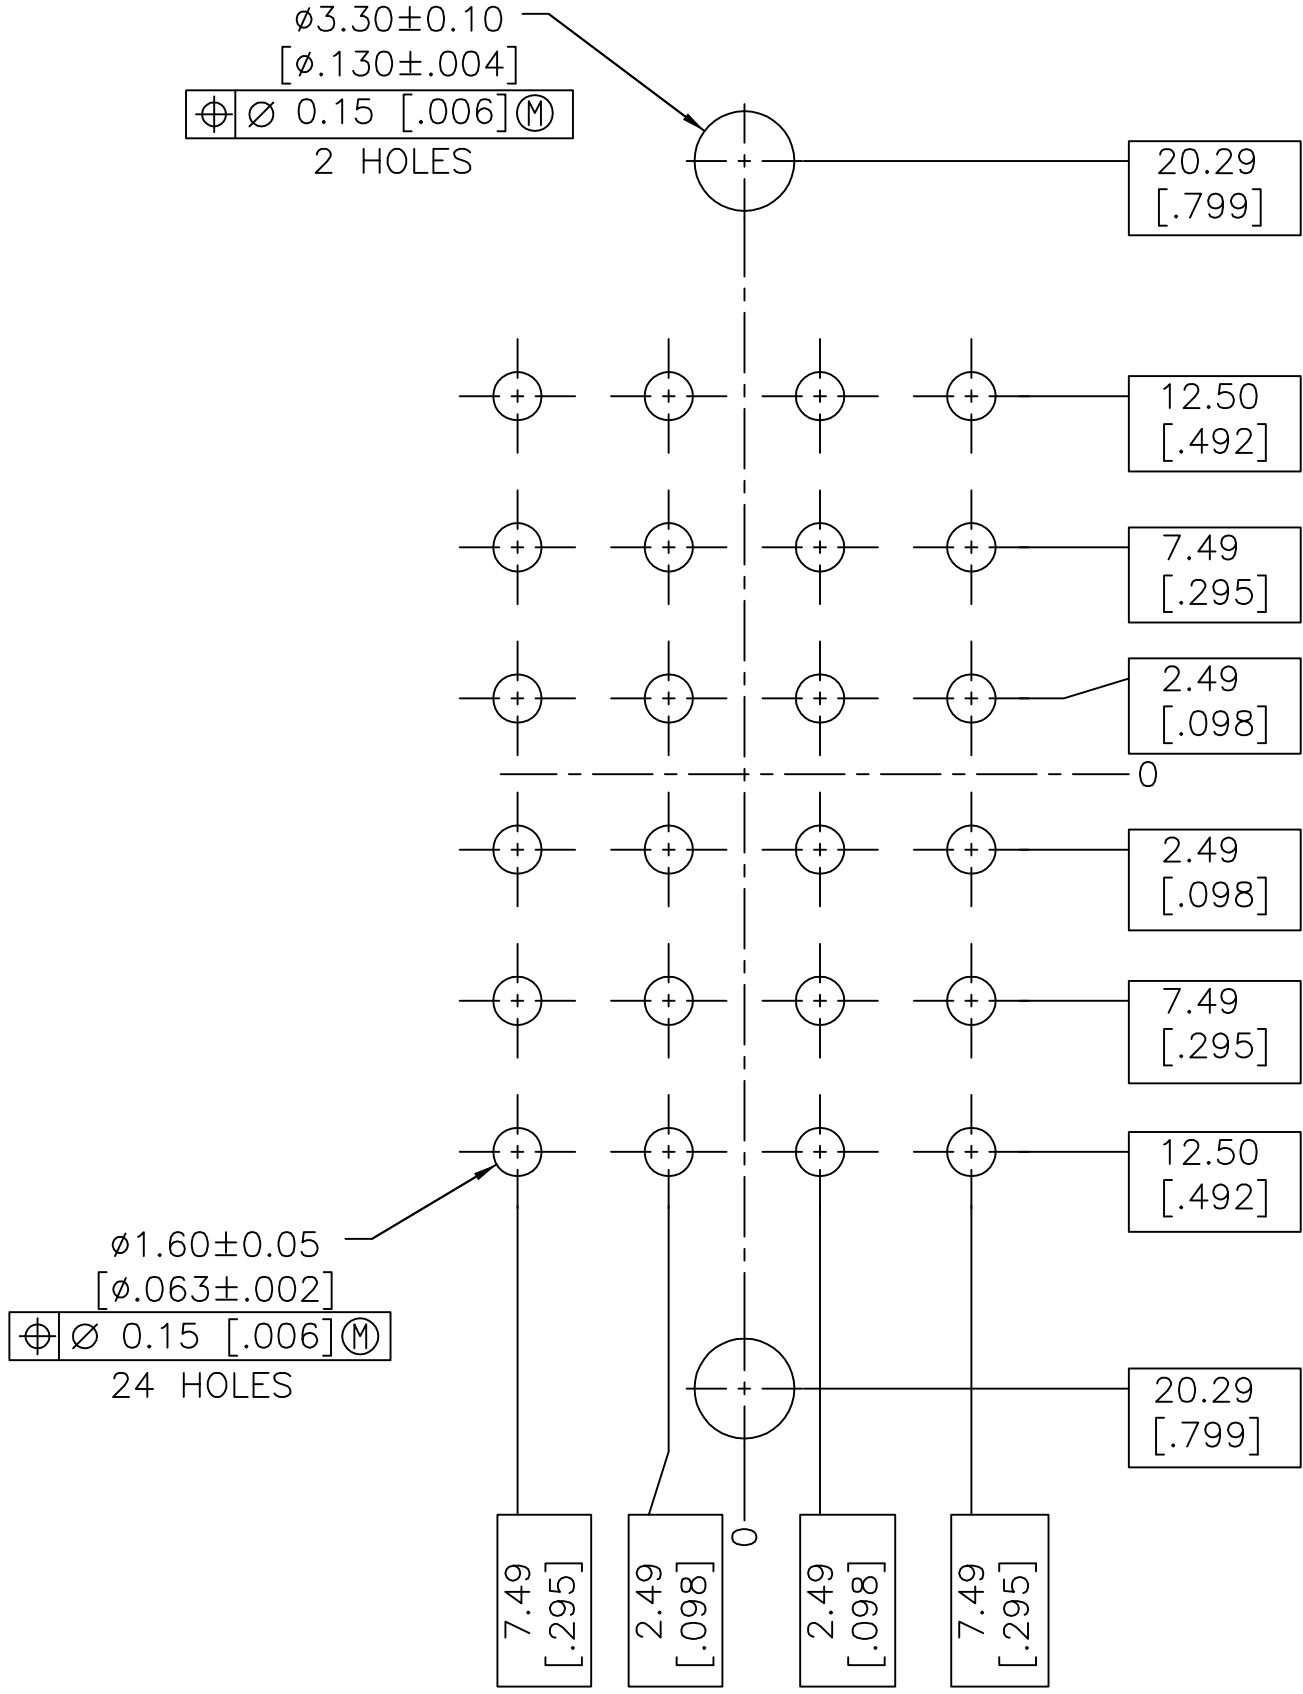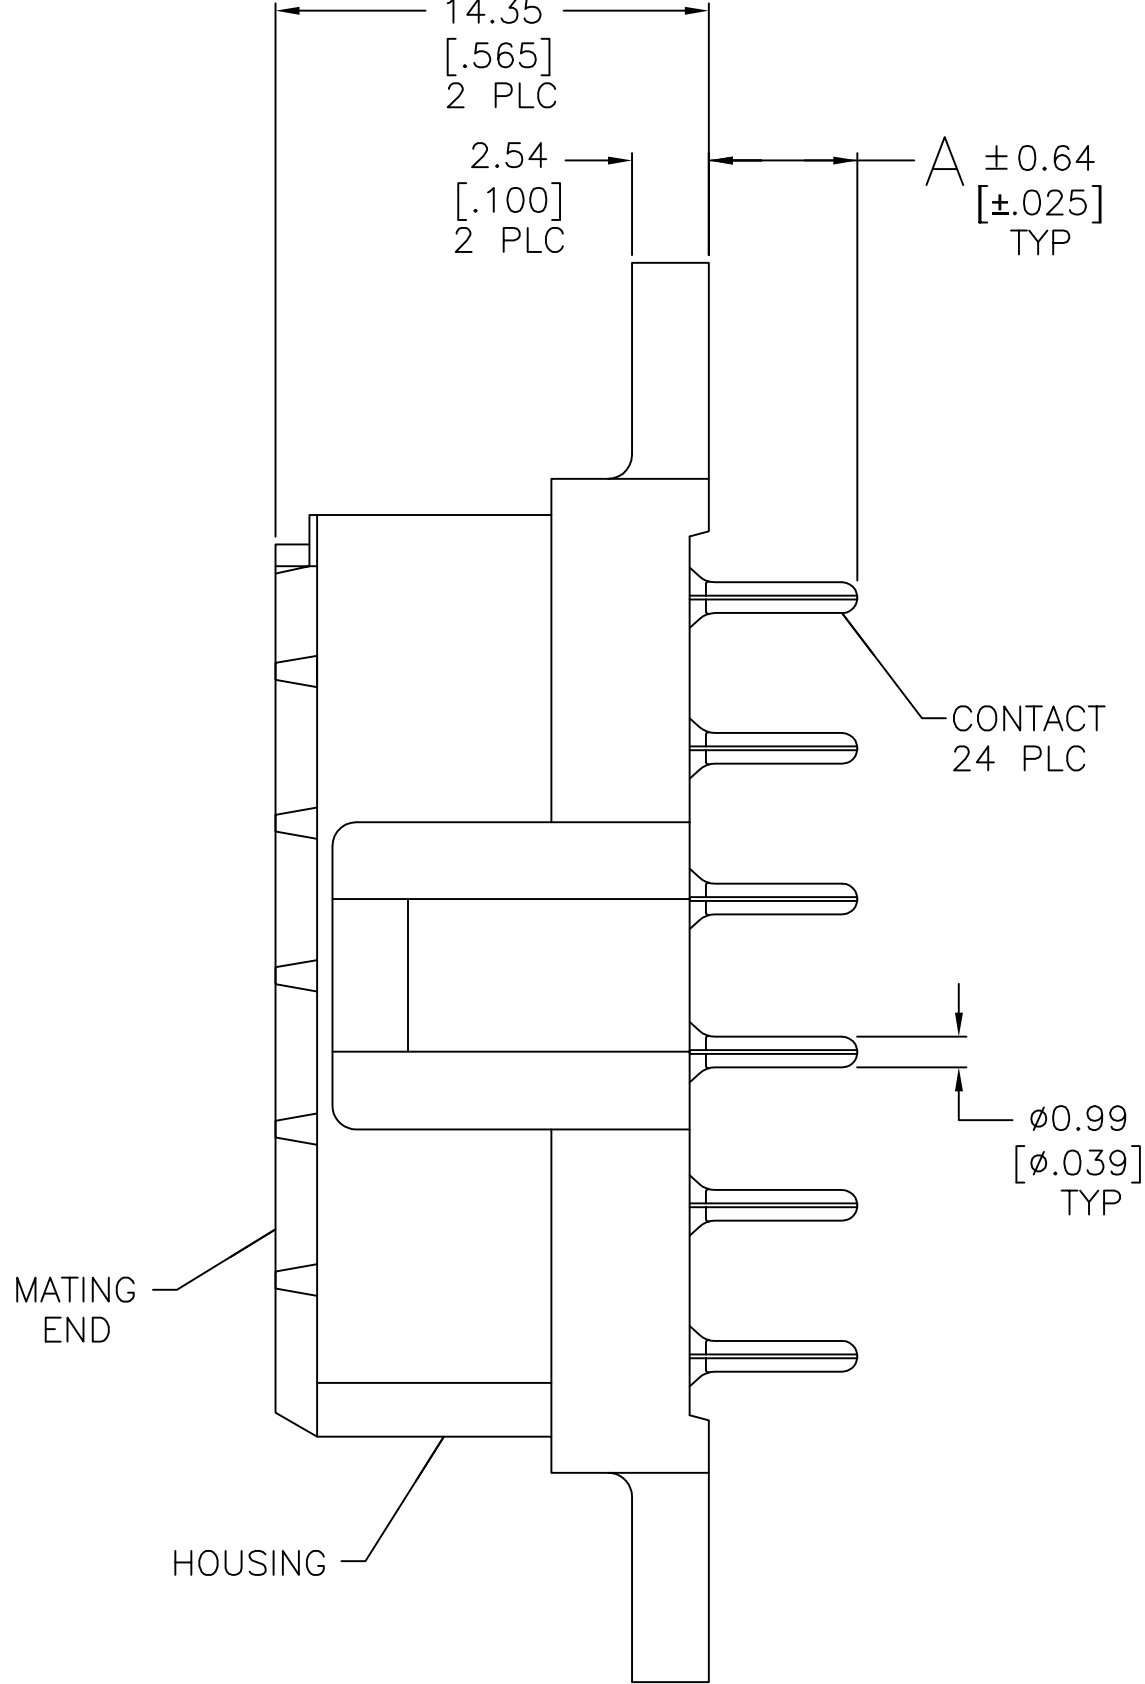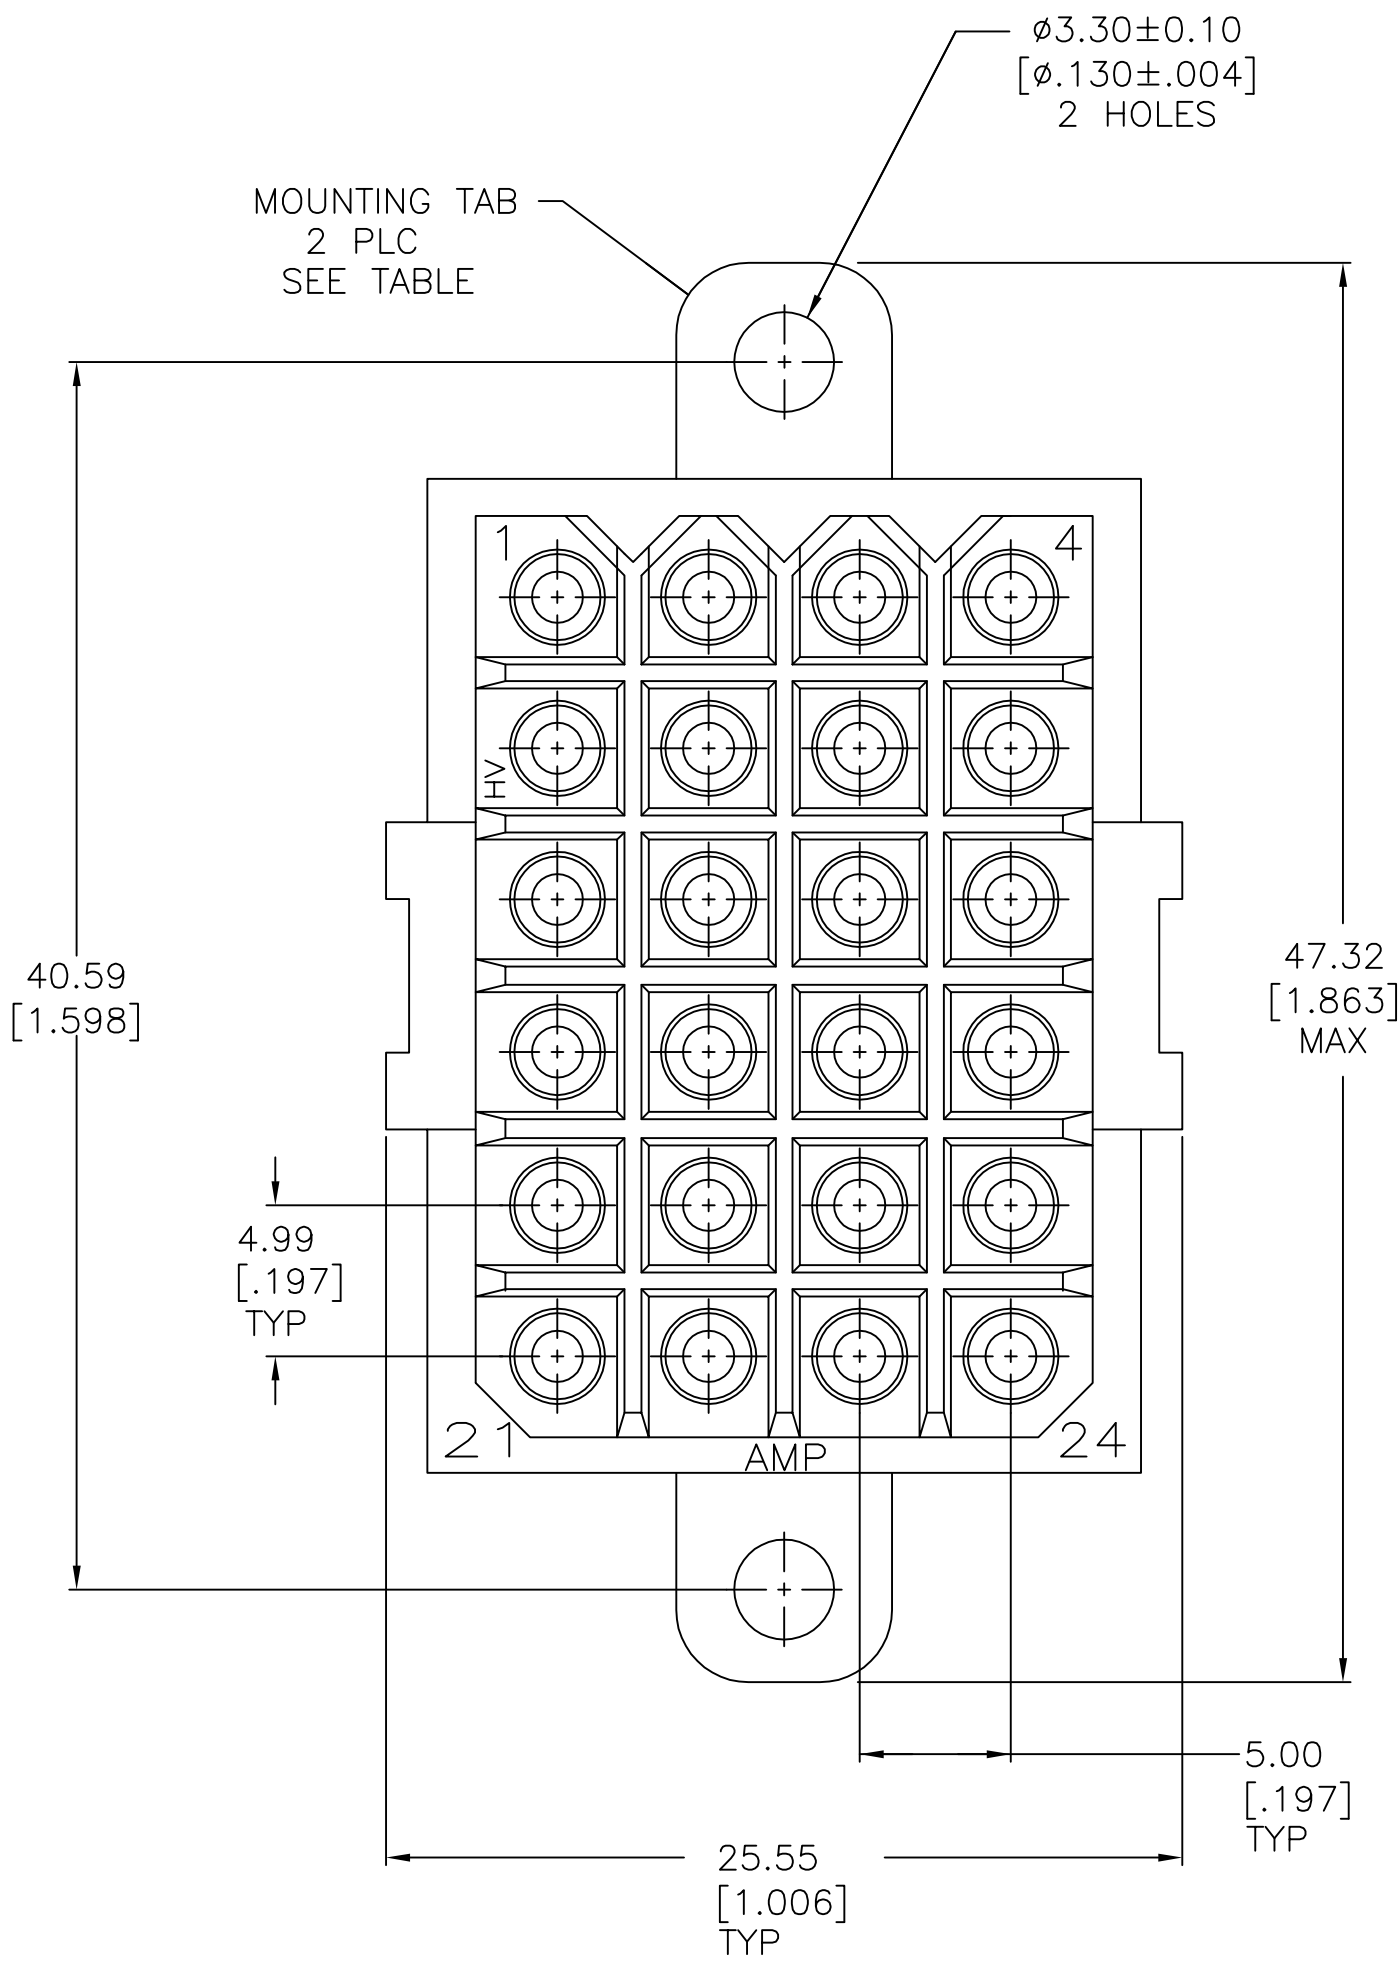

RECOMMENDED LAYOUT

OBSOLETE	4.60	[.181]	<u>6</u>	NO	4—207532—1—
	4.60	[.181]	<u>6</u>	YES	1—207532—0
	4.60	[.181]	<u>5</u>	NO	207532—9
	4.60	[.181]	<u>5</u>	YES	207532—8
OBSOLETE	9.68	[.381]	<u>3</u>	NO	—207532—7—
OBSOLETE	4.60	[.181]	<u>4</u>	NO	207532—4
OBSOLETE	4.60	[.181]	<u>4</u>	YES	207532—3
OBSOLETE	4.60	[.181]	<u>3</u>	NO	207532—2
OBSOLETE	4.60	[.181]	<u>3</u>	YES	207532—1
	A	CONTACT FINISH	MOUNTING TABS	PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/19/92	STE TE Connectivity	
		CHK	3-25-92		
DIMENSIONS: mm [INCHES]		APVD	3-25-92		
		NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	108-10033	SOCKET HEADER ASSEMBLY, 24 POSITION, METRIMATE	
		APPLICATION SPEC			
MATERIAL HOUSING: 1		WEIGHT	-	SIZE A1	
		FINISH CONTACT: SEE TABLE		CAGE CODE 00779	
				DRAWING NO 207532	
				RESTRICTED TO -	
				CUSTOMER DRAWING	
				SCALE 4:1	
				SHEET 1 of 1	
				REV S	