



# Fair-Rite Products Corp. Your Signal Solution®


Ferrite Components for the Electronics Industry

Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 www.fair-rite.com

Fair-Rite Product's Catalog  
Part Data Sheet, 9578293202  
Printed: 2013-02-27



RoHS  
Material Declaration

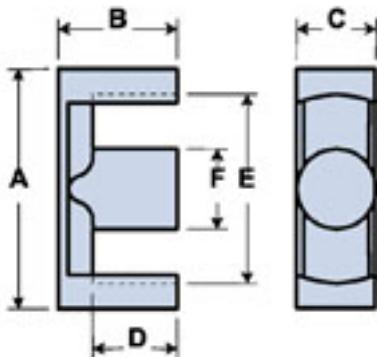

Part Number: 9578293202

Frequency Range: Dimensions

Description: 78 ETD CORE

Application: Inductive Components

Where Used: Closed Magnetic Circuit

Part Type: ETD Cores

Generic Name: ETD29

## Mechanical Specifications

Weight: 28.000 (g)

## Part Type Information

ETD29, ETD34, ETD39, ETD44, ETD49, ETD54, ETD59

ETD cores have been designed to make optimum use of a given volume of ferrite material for maximum throughput power, specifically for forward converter transformers. The structure, which includes a round center post, approaches a nearly uniform cross-sectional area throughout the core and provides a winding area that minimizes winding losses. ETD cores are used mainly in switched-mode power supplies and permit off-line designs where IEC and VDE isolation requirements must be met.

- ETD cores can be supplied with the centerpost gapped to a mechanical dimension.
- ETD cores can also be supplied to an AL value, these would be supplied in sets.



# Fair-Rite Products Corp.

## Your Signal Solution®

Ferrite Components for the Electronics Industry

Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 www.fair-rite.com

Fair-Rite Product's Catalog  
Part Data Sheet, 9578293202  
Printed: 2013-02-27



RoHS  
Material Declaration

### Mechanical Specifications

Dim	mm	mm tol	nominal inch	inch misc.
A	29.80	$\pm 0.6$	1.173	-
B	15.80	$\pm 0.2$	0.622	-
C	9.50	$\pm 0.3$	0.374	-
D	11.00	$\pm 0.2$	0.433	-
E	22.00	min	0.866	min
F	9.50	$\pm 0.3$	0.374	-
G	-	-	-	-
H	-	-	-	-
J	-	-	-	-
K	-	-	-	-

### Electrical Specifications

Typical Impedance ( $\Omega$ )	
Electrical Properties	
$A_L$ (nH)	2200 $\pm 25\%$
$A_e$ (cm $^2$ )	0.76700
$\sum I/A$ (cm $^{-1}$ )	9.50
$l_e$ (cm)	7.07
$V_e$ (cm $^3$ )	5.41800
$A_{min}$ (cm $^2$ )	.709

### Land Patterns

V	W ref	X	Y	Z
-	-	-	-	-
-	-	-	-	-

### Winding Information

Turns Tested	Wire Size	1st Wire Length	2nd Wire Length
-	-	-	-

### Reel Information

Tape Width mm	Pitch mm	Parts 7 "	Parts 13 "	Parts 14 "
-	-	-	-	-

### Package Size

Pkg Size
- (-)

### Connector Plate

# Holes	# Rows
-	-

### Legend

+ Test frequency

Preferred parts, the suggested choice for new designs, have shorter lead times and are more readily available.

The column H(Oe) gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of H times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.

A 1/2 turn is defined as a single pass through a hole.

$\sum I/A$  - Core Constant

$A_e$  - Effective Cross-Sectional Area

$A_L$  - Inductance Factor ( $\frac{L}{N^2}$ )

N/AWG - Number of Turns/Wire Size for Test Coil

$l_e$ : Effective Path Length

$V_e$ : Effective Core Volume

NI - Value of dc Ampere-turns



# Fair-Rite Products Corp. Your Signal Solution®

Ferrite Components for the Electronics Industry

Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 [www.fair-rite.com](http://www.fair-rite.com)

Fair-Rite Product's Catalog  
Part Data Sheet, 9578293202  
Printed: 2013-02-27



RoHS  
Material  
Declaration

## Ferrite Material Constants

Specific Heat .....	0.25 cal/g/°C
Thermal Conductivity .....	10x10 <sup>-3</sup> cal/sec/cm/°C
Coefficient of Linear Expansion .....	8 - 10x10 <sup>-6</sup> /°C
Tensile Strength .....	4.9 kgf/mm <sup>2</sup>
Compressive Strength .....	42 kgf/mm <sup>2</sup>
Young's Modulus .....	15x10 <sup>3</sup> kgf/mm <sup>2</sup>
Hardness (Knoop) .....	650
Specific Gravity .....	≈ 4.7 g/cm <sup>3</sup>

*The above quoted properties are typical for Fair-Rite MnZn and NiZn ferrites.*

See next page for further material specifications.



# Fair-Rite Products Corp.

## Your Signal Solution®

Ferrite Components for the Electronics Industry

Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 www.fair-rite.com

A MnZn ferrite specifically designed for power applications for frequencies up to 200 kHz.

RFID rods, toroids, U cores, and E&I cores are all available in 78 material.


Fair-Rite Product's Catalog  
Part Data Sheet, 9578293202  
Printed: 2013-02-27



### 78 Material Characteristics:


Property	Unit	Symbol	Value
Initial Permeability @ $B < 10$ gauss		$\mu_i$	2300
Flux Density @ Field Strength	gauss oersted	$B$ $H$	4800 5
Residual Flux Density	gauss	$B_r$	1500
Coercive Force	oersted	$H_c$	0.20
Loss Factor @ Frequency	$10^{-6}$ MHz	$\tan \delta / \mu_i$	4.5 0.1
Temperature Coefficient of Initial Permeability (20 -70°C)	%/ $^{\circ}$ C		1.0
Curie Temperature	$^{\circ}$ C	$T_c$	>200
Resistivity	$\Omega$ cm	$\rho$	$2 \times 10^2$

### Complex Permeability vs. Frequency

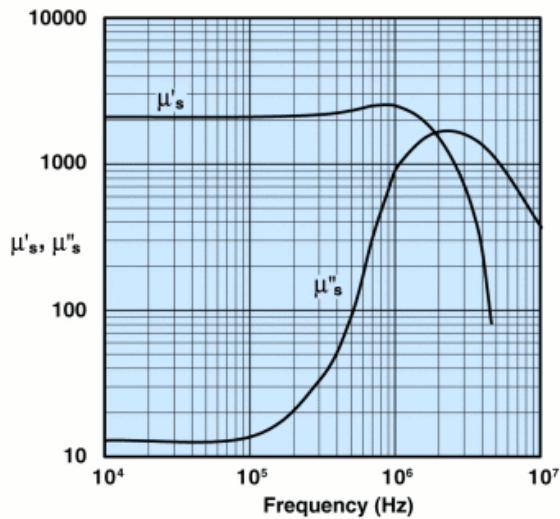


Measured on an 18/10/6mm toroid using the HP 4284A and the HP 4291A.

### Initial Permeability vs. Temperature

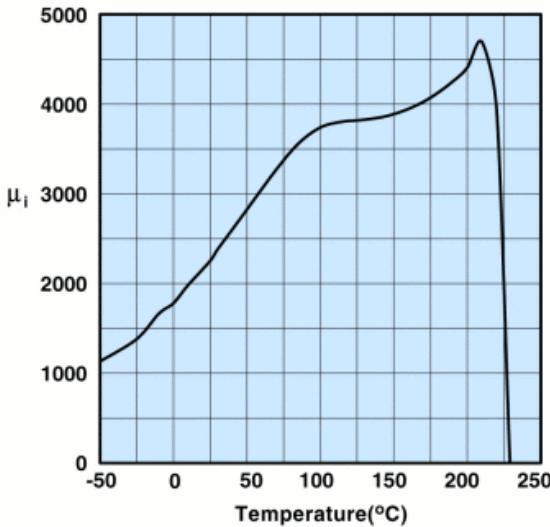


Measured on an 18/10/6mm toroid at 100kHz.

### Incremental Permeability vs. H

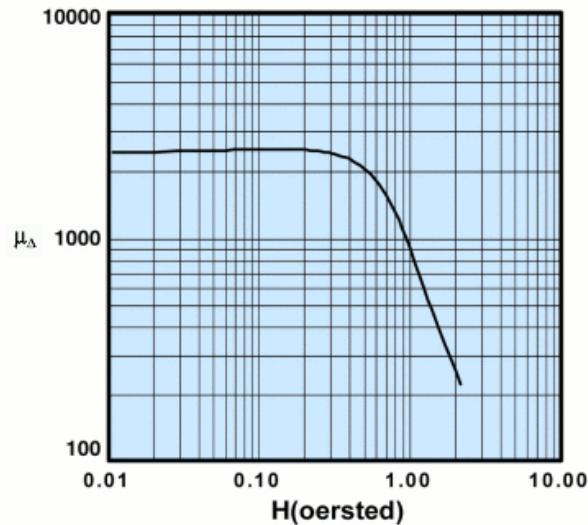

### Hysteresis Loop

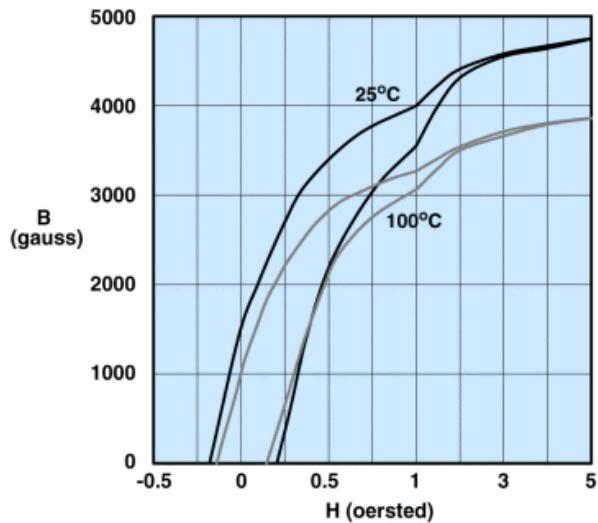

Measured on an 18/10/6mm toroid at 10kHz.




# Fair-Rite Products Corp. Your Signal Solution®

Ferrite Components for the Electronics Industry

Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 www.fair-rite.com

## Amplitude Permeability vs. Flux Density

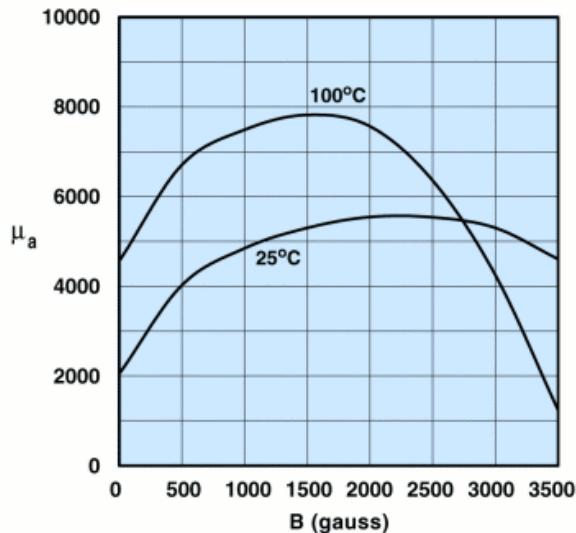


Measured on an 18/10/6mm toroid at 10kHz.

Fair-Rite Product's Catalog  
Part Data Sheet, 9578293202  
Printed: 2013-02-27




## Power Loss Density vs. Flux Density

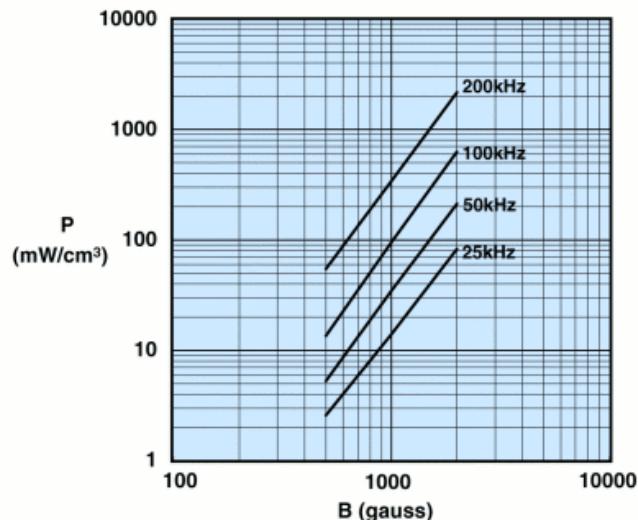


Measured on an 18/10/6mm toroid using the Clarke Hess 258 VAW at 100°C

## Power Loss Density vs. Temperature

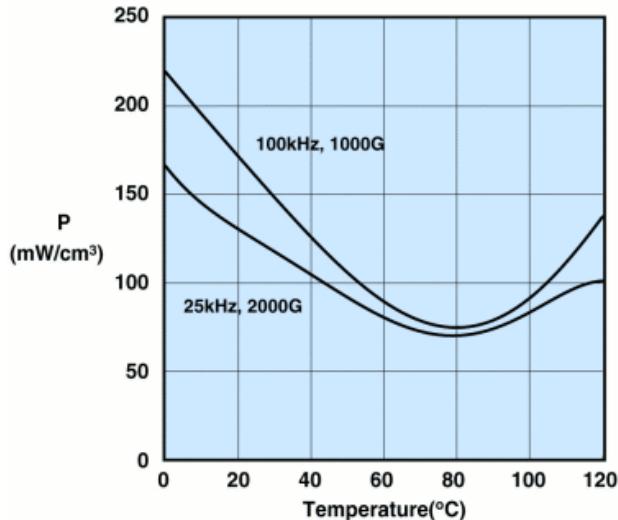

Measured on an 18/10/6mm toroid using the Clarke Hess 258 VAW.

## Flux Density vs. Temperature

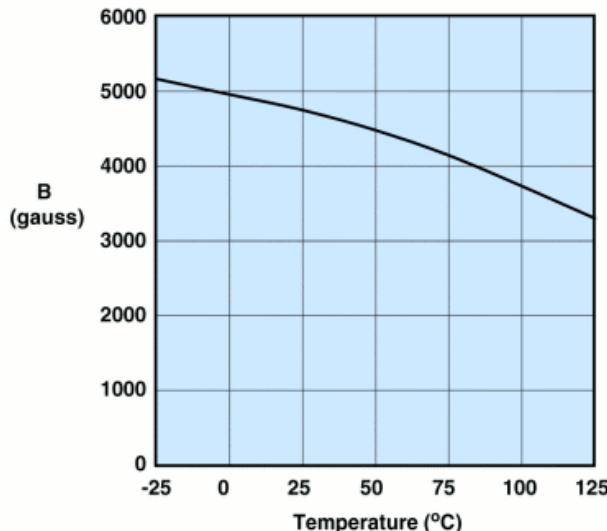

Measured on an 18/10/6 mm toroid at 10kHz and H=5 oersted.