

# Data Sheet



# Introduction

The N2870A Series passive probe family sets new standards in high performance probing of up to 1.5 GHz bandwidth. These general purpose probes and accessories offer high quality measurements at a very reasonable price.

## Faithful reproduction of signals

The N2870A Series passive probes offer DC to 35 MHz, 200 MHz, 350 MHz, 500 MHz and 1.5 GHz bandwidths and various attenuation factors to address a wide range of measurement needs. For general purpose probing, you can use the N2873A 500 MHz model, which provides superior 10 M $\Omega$  input resistance, 9.5 pF of low input capacitance and low-inductance ground connection. This keeps probe loading low enough to achieve high signal integrity measurements. The 1.5 GHz passive probe offers even lower input capacitance for measuring faster edges more accurately, making it a low-cost alternative to an active probe.

All N2870A Series probes come with the probe ID readout feature, allowing the probe to be automatically recognized when connected to most Keysight Technologies, Inc. oscilloscopes.

## Family of 7 mini passive probes spanning from 35 MHz to 1.5 GHz

- Small 2.5 mm probe tip
- Replaceable spring-loaded probe tip for reliable contact
- 1:1, 10:1, 20:1 and 100:1 attenuation ratios with auto probe ID readout
- Wide compensation range for a variety of scope inputs
- Comes with various probe tip accessories
- Optional probe accessory kits
- N2873A, 500 MHz, 10:1 probe ships with the 9000 Series Infiniium oscilloscope



Figure 1. N2873A 500 MHz passive probe with standard accessories

## Easy access to signals

The compact design with a 2.5 mm probe tip diameter provides better visibility to the circuit under test than conventional 5 mm or 3.5 mm probe tips. This makes it easier to probe today's fine pitched space ICs and components. In addition, the replaceable probe tip is spring loaded, keeping it from slipping off the device you are probing. All N2870A Series probes come installed with one spring-loaded probe tip and four spare probe tips (2 spring-loaded tips, and 2 rigid tips).



Figure 2. Sharp probe tip makes it easy to probe today's fine pitched components.

To minimize the inductive effects that cause ringing of high speed signals, use the innovative ground blade or spring ground connection. Adhesive copper pads provided with the probe can be attached on top of an IC and connected to its ground pins to create a convenient ground plane for the probe to connect to. When used with the ground blade this method provides an ideal ground connection for probing signals with high frequency contents.

The IC caps fits over the probe tip, providing a convenient self-aligning connection to fine-pitch IC pins. Every N2870A Series probe comes with 5 different IC caps for IC lead pitches from 0.5 mm through 1.27 mm.

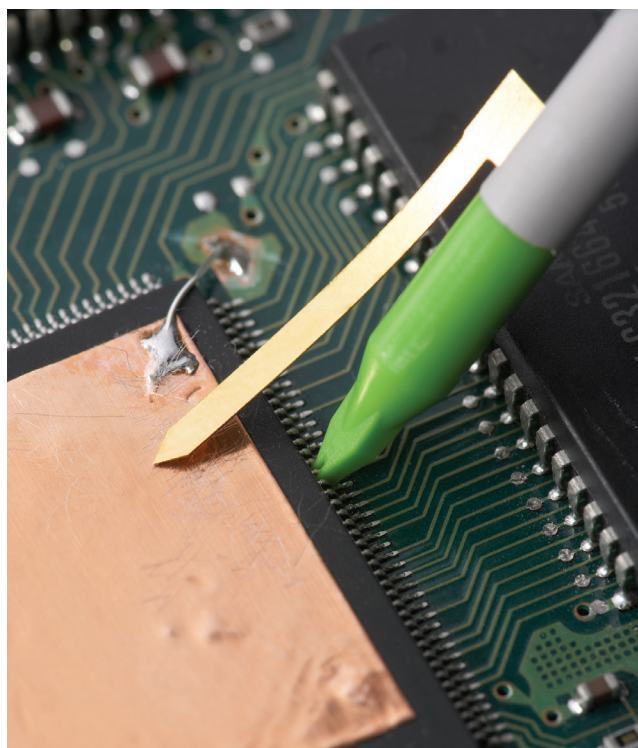


Figure 3. Short ground blade with copper ground plane pad provides an ideal ground connection for probing signals with high frequency contents. The green 0.5 mm pitch IC cap fits over the probe tip providing a convenient self-aligning connection to IC pins.

## Variety of connections

Use the optional accessory kits to provide access to signals and components that are difficult to probe.

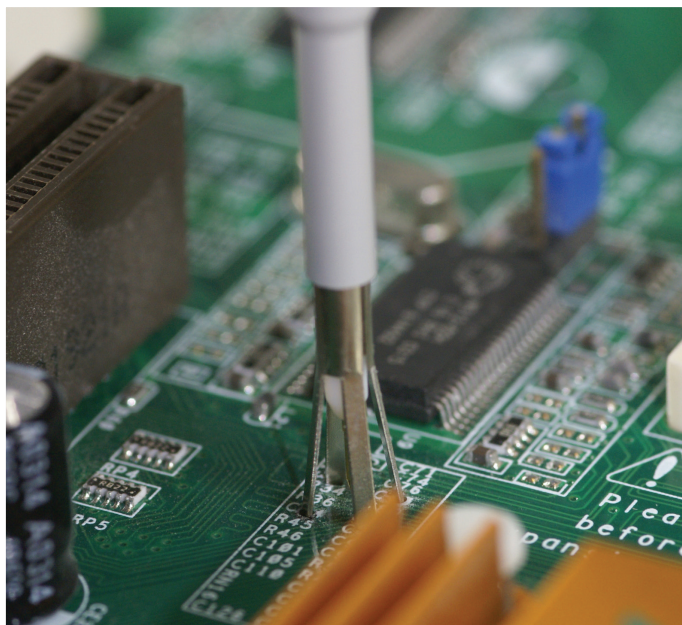


Figure 4. The Keysight N2885A PCB adapter sockets are designed to solder into a printed circuit board (PCB) as test points to minimize ground inductance and maximize signal fidelity. This package contains 25 sockets.

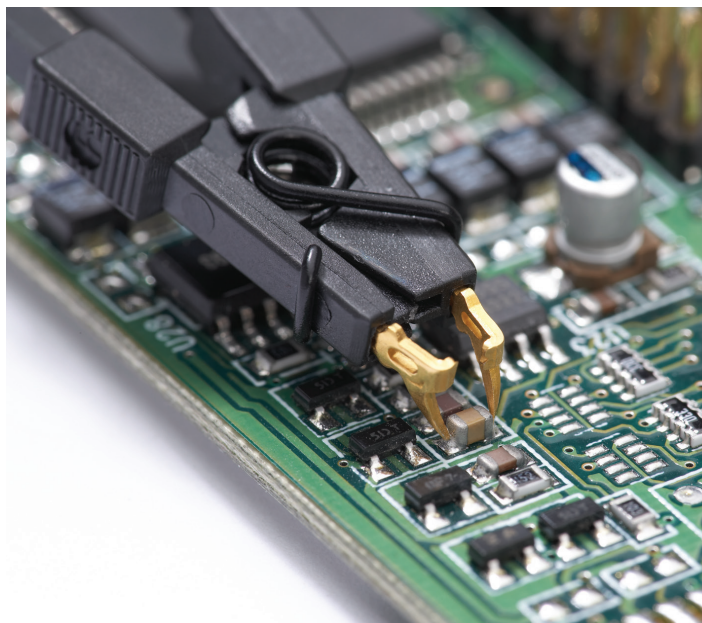


Figure 5. Micro SMD clips were specially designed to provide fast and convenient hands-free probing of surface mount chip resistors or capacitors. This part is included in the N2877A and N2879A accessory kits.

## Variety of connections (continued)

Use the optional accessory kits to provide access to signals and components that are difficult to probe.

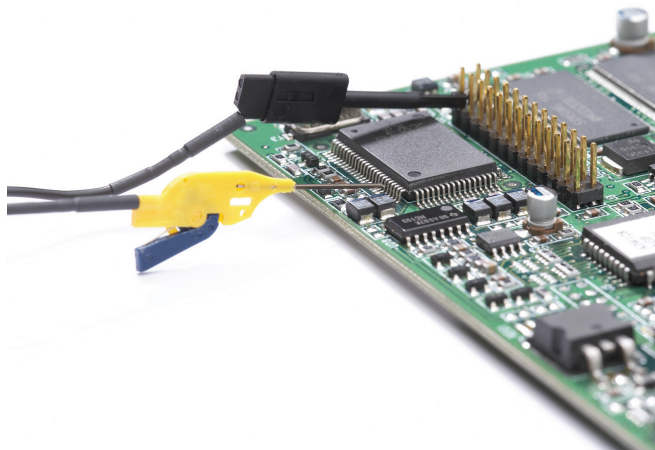


Figure 6. With today's miniature IC- and component-packaging techniques, probing can be a considerable challenge. Use 0.5 mm QFP IC clips with TQFP/PQFP packages with 0.5 mm lead pitch or greater, or use pico-hook clips made for connections over components or wires with leads up to 0.04" diameter or smaller.

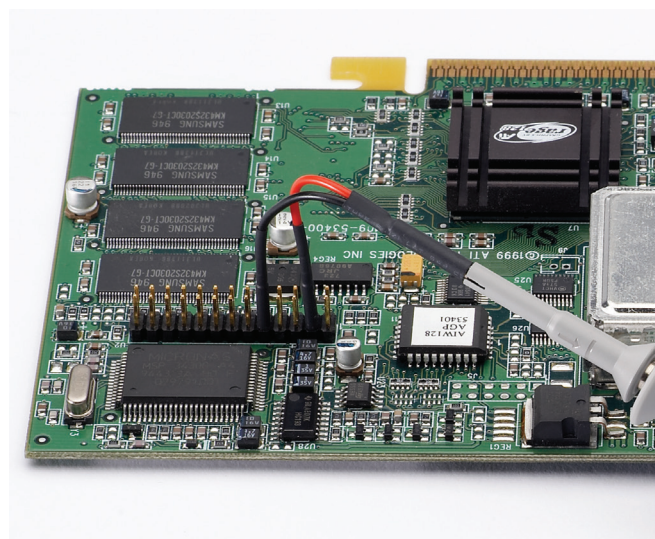


Figure 7. The dual lead adapter allows you to easily connect the N2870A Series probe to a popular 0.1" pin header with 0.025" square pins. This dual lead adapter has no shorting hazards since all external metal surfaces are insulated.

Variety of connections (continued)



Figure 8. An IC cap adapter and ground blade with optional N2786A two-leg probe positioner offers an ideal hands-free solution for short circuit-proof probing of a fine-pitch IC. The N2877A deluxe accessory kit and N2878A fine-pitch accessory kit contain one N2786A two-leg probe positioner.

Electrical characteristics

| Model number | Bandwidth (-3dB) | Attenuation ratio | Input C               | Input R (Scope and probe) | Max input voltage (AC RMS)  | Scope input coupling | Scope comp range |
|--------------|------------------|-------------------|-----------------------|---------------------------|-----------------------------|----------------------|------------------|
| N2870A       | 35 MHz           | 1:1               | 39 pF (+oscilloscope) | 1 MΩ                      | 55V CAT II                  | 1 MΩ                 | —                |
| N2871A       | 200 MHz          | 10:1              | 9.5 pF                | 10 MΩ                     | 400 V CAT I<br>300 V CAT II | 1 MΩ                 | 10-25 pF         |
| N2872A       | 350 MHz          | 10:1              | 9.5 pF                | 10 MΩ                     | 400 V CAT I<br>300 V CAT II | 1 MΩ                 | 10-25 pF         |
| N2873A       | 500 MHz          | 10:1              | 9.5 pF                | 10 MΩ                     | 400 V CAT I<br>300 V CAT II | 1 MΩ                 | 10-25 pF         |
| N2874A       | 1.5 GHz          | 10:1              | 1.8 pF                | 500 Ω                     | 8.5 V CAT I                 | 50 Ω                 | —                |
| N2875A       | 500 MHz          | 20:1              | 5.6 pF                | 20 MΩ                     | 400 V CAT I<br>300 V CAT II | 1 MΩ                 | 7-20 pF          |
| N2876A       | 1.5 GHz          | 100:1             | 2.2 pF                | 5 kΩ                      | 21 V CAT I                  | 50 Ω                 | —                |

Common to all

Probe ID readout: Compatible with Keysight’s InfiniiVision and Infiniium Series oscilloscopes

Mechanical characteristics

- Weight (probe only): 48 g
- Cable length: 1.3 m
- Ground sleeve diameter: 2.5 mm

Environmental characteristics

Temperature

- Operating: 0 °C to +50 °C
- Non-operating: -40 °C to +70 °C

Altitude

- Operating: 2,000 m (6,561 ft)
- Non-operating: 15,000 (49,212 ft)

Humidity

- Operating: 80% room humidity for temperatures up to 31 °C, decreasing linearly to 40% at 50 °C

Pollution degree: 2

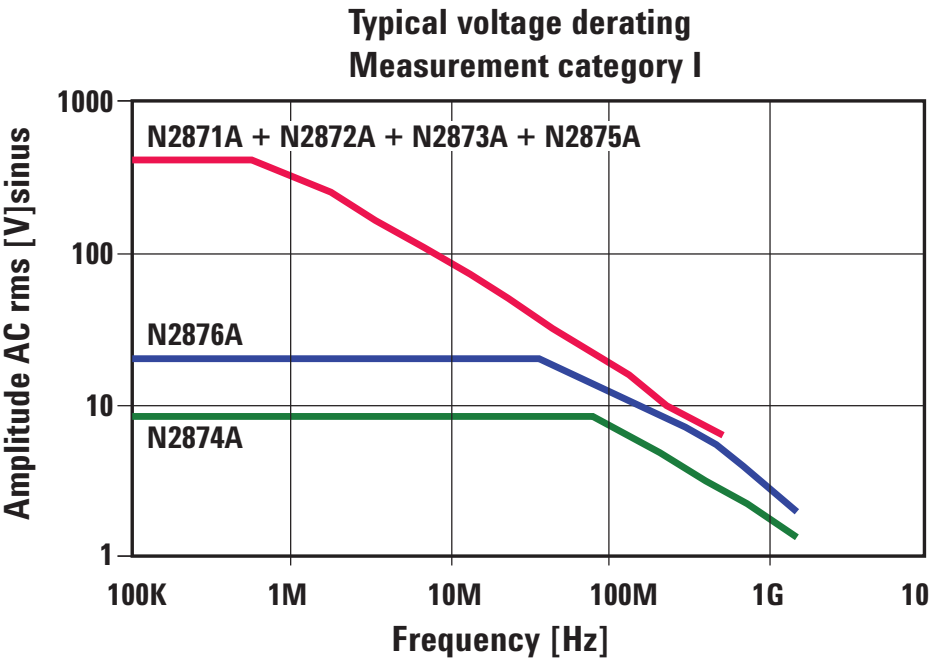


Figure 9. N2870A Series amplitude vs. frequency characteristics

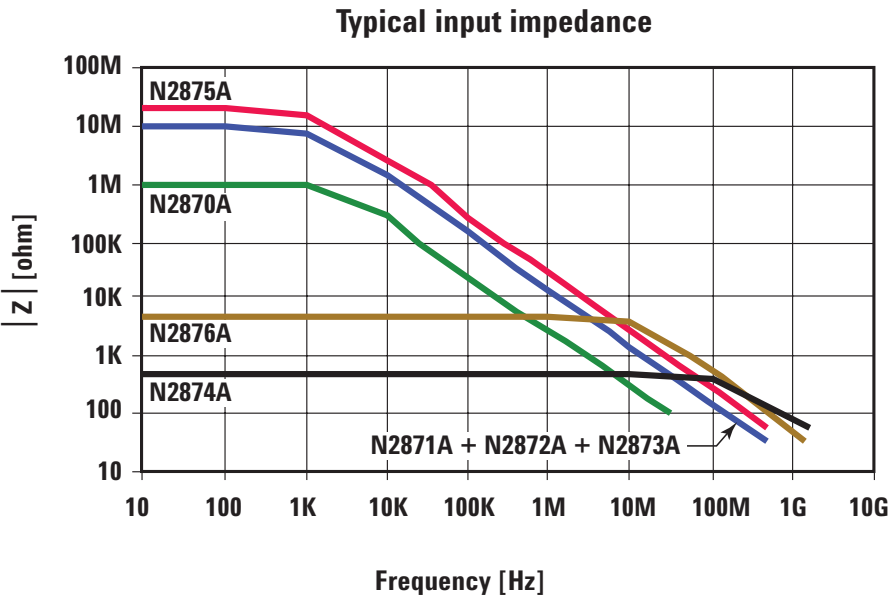


Figure 10. N2870A Series input impedance vs. frequency characteristics

## Standard accessories

|                                           | N2871A, N2872A,<br>N2873A, N2875A | N2870A | N2874A,<br>N2876A |
|-------------------------------------------|-----------------------------------|--------|-------------------|
| Rigid probe tips, qty 2                   | •                                 | •      | •                 |
| Spring-loaded probe tips, qty 2           | •                                 | •      | •                 |
| Sprung hook 2.5 mm                        | •                                 | •      |                   |
| Short sprung hook 2.5 mm                  |                                   |        | •                 |
| Ground blade 2.5 mm with<br>2 copper pads | •                                 | •      | •                 |
| IC cap 2.5-0.5 mm green                   | •                                 | •      | •                 |
| IC cap 2.5-0.65 mm blue                   | •                                 | •      | •                 |
| IC cap 2.5-0.8 mm grey                    | •                                 | •      | •                 |
| IC cap 2.5-1.0 mm brown                   | •                                 | •      | •                 |
| IC cap 2.5-1.27 mm black                  | •                                 | •      | •                 |
| Insulating cap 2.5 mm                     | •                                 | •      | •                 |
| Protection cap 2.5 mm                     | •                                 | •      | •                 |
| BNC adapter 2.5 mm                        | •                                 | •      | •                 |
| Ground spring 2.5 mm                      | •                                 | •      | •                 |
| Ground lead 15 cm                         | •                                 | •      | •                 |
| Trimmer tool                              | •                                 |        |                   |
| Color coded rings 3x4                     | •                                 | •      | •                 |
| User's guide manual                       | •                                 | •      | •                 |

## Optional accessories

|                                          | N2877A<br>Deluxe<br>accessory<br>kit | N2878A<br>General<br>purpose<br>accessory<br>kit | N2879A Fine<br>pitch<br>accessory kit | N2885A<br>PCB socket<br>adapter kit |
|------------------------------------------|--------------------------------------|--------------------------------------------------|---------------------------------------|-------------------------------------|
| IC Cap 2.5-0.5 green                     | •                                    | •                                                | •                                     |                                     |
| IC Cap 2.5-0.65 blue                     | •                                    | •                                                | •                                     |                                     |
| IC Cap 2.5-0.8 grey                      | •                                    | •                                                | •                                     |                                     |
| IC Cap 2.5-1.0 brown                     | •                                    | •                                                | •                                     |                                     |
| IC Cap 2.5-1.27 black                    | •                                    | •                                                | •                                     |                                     |
| Insulating cap 2.5 mm                    | •                                    | •                                                | •                                     |                                     |
| Protection cap 2.5 mm                    | •                                    | •                                                | •                                     |                                     |
| Bernstein adjustment<br>tool             | •                                    |                                                  |                                       |                                     |
| HF compensated<br>ground lead 22 cm      | •                                    |                                                  |                                       |                                     |
| Ground lead 22 cm to<br>4 mm banana plug | •                                    |                                                  |                                       |                                     |
| Ground lead 22 cm to 2<br>mm banana plug | •                                    |                                                  |                                       |                                     |
| Ground lead 11 cm to<br>miniclip         | •                                    |                                                  |                                       |                                     |
| Ground lead 11 cm to<br>0.8 mm socket    | •                                    |                                                  |                                       |                                     |

## Optional accessories (continued)

|                                                                              | N2877A<br>Deluxe<br>accessory<br>kit | N2878A<br>General<br>purpose<br>accessory<br>kit | N2879A Fine<br>pitch<br>accessory kit | N2885A<br>PCB socket<br>adapter kit |
|------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------|---------------------------------------|-------------------------------------|
| Ground spring 2.5                                                            | •                                    |                                                  | •                                     |                                     |
| 10 Self-adhesive<br>Cu-pads (2x2cm)                                          | •                                    | •                                                | •                                     |                                     |
| Ground blade 2.5                                                             | •                                    | •                                                | •                                     |                                     |
| Ground lead 2.5 to mini<br>alligator clip                                    | •                                    |                                                  |                                       |                                     |
| Set of 5 spring tips gold<br>plated 0.5mm                                    | •                                    | •                                                | •                                     |                                     |
| Set of 5 solid tips cuBe<br>0.5mm                                            | •                                    | •                                                | •                                     |                                     |
| Adapter 2.5 to 2 mm<br>banana plug                                           | •                                    |                                                  |                                       |                                     |
| Adapter 2.5 to 0.8 mm<br>socket                                              | •                                    |                                                  |                                       |                                     |
| Dual adapter 2.5 to<br>0.8 mm sockets                                        | •                                    |                                                  | •                                     |                                     |
| Sprung hook 2.5 mm                                                           | •                                    | •                                                |                                       |                                     |
| Short sprung hook<br>2.5 mm                                                  | •                                    |                                                  |                                       |                                     |
| Adapter 2.5 to 4 mm<br>banana plug                                           | •                                    |                                                  |                                       |                                     |
| Pico hook black                                                              | •                                    |                                                  | •                                     |                                     |
| Pico hook red                                                                | •                                    |                                                  | •                                     |                                     |
| BNC adapter 2.5 mm                                                           | •                                    | •                                                |                                       |                                     |
| PCB adapter kit<br>2.5 mm                                                    | •                                    |                                                  | •                                     | • (Qty 25)                          |
| QFP IC-Clips 13 mm<br>long down to 0.5 mm<br>pitch (1 pair yellow/<br>green) | •                                    |                                                  | •                                     |                                     |
| QFP IC-Clips short<br>down to 0.5mm pitch<br>(1 pair yellow/green)           | •                                    |                                                  | •                                     |                                     |
| Ground lead 15 cm                                                            | •                                    | •                                                |                                       |                                     |
| Color coded rings<br>3x4 color                                               | •                                    | •                                                |                                       |                                     |
| 2-leg probe<br>positioner (N2786A)                                           | •                                    |                                                  | •                                     |                                     |
| Micro SMD clip                                                               | •                                    |                                                  | •                                     |                                     |

Note: For the exact number of accessories that come with each of the accessory kits, refer to the N2870A Series probes and accessories user's guide with Keysight literature number N2876-97000.

Replacement parts

| Part number | Description                                                         |
|-------------|---------------------------------------------------------------------|
| N4831A      | Sprung Hook Adapter 2.5mm for N2870A,71A,72A,73A,75A (qty 2)        |
| N4837A      | Ground Lead 15cm for N2870A Series probes (qty 2)                   |
| 0960-2907   | Short Spring Hook 2.5mm for N2874A and N2876A 1.5 GHz passive probe |
| 0960-2908   | 10 Self-adhesive Copper-pads 2X2cm for N2870A Series probes         |
| N4836A      | Dual Lead-Adapter for N2870A Series probes (qty 2)                  |
| N4829A      | Probe tip kit (10 each rigid and spring loaded tip)                 |
| N4838A      | 2.5 mm ground spring (qty 2)                                        |
| N4863A      | 2.5 mm probe tip-to-PCB adapter, horizontal (qty 2)                 |
| N4864A      | 2.5 mm probe tip-to-PCB adapter, vertical (qty 2)                   |

Related literature

| Publication                                                | Description     | Publication number |
|------------------------------------------------------------|-----------------|--------------------|
| Keysight Oscilloscope Probes and Accessories               | Selection Guide | 5989-6162EN        |
| Keysight InfiniiVision Oscilloscope Probes and Accessories | Data Sheet      | 5968-8153EN        |
| Keysight Infiniium Oscilloscope Probes and Accessories     | Data Sheet      | 5968-7141EN        |



Keysight Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications

**myKeysight****myKeysight**[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

**Three-Year Warranty**[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

**Keysight Assurance Plans**[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System

**Keysight Channel Partners**[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/N2870A](http://www.keysight.com/find/N2870A)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

**Asia Pacific**

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

**Europe & Middle East**

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1 800 832700  |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 0800 000154   |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-09-04-14)