

P R O D U C T D A T A S H E E T

50VA CHASSIS MOUNTED TRANSFORMER



-  Designed, Manufactured and tested in accordance with **BS3535, EN60742*, EN61558*, EN60950.**
-  Single 230V or Dual 115V Primaries.
-  4800V isolation Primary - Secondary
-  CE Marked.
-  Comprehensive choice of Secondary Voltages.
-  Flame Retardant materials to **UL94-V0.**
-  Fully shrouded double section construction.

Weight	0.98	Kg
Typical Regulation	10	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-V0 Class "B" 130°C	

*requires additional over-current /over-temperature protection.

Please see sheet 2 for part numbers.

Part Numbers

Part No	Primary	Secondary	Recommended Secondary Fuse
D3048	230V	6+6V	4AT
D3049	230V	9+9V	2.5AT
D3050	230V	12+12V	2AT
D3051	230V	15+15V	1.6AT
D3052	115+115V	6+6V	4AT
D3053	115+115V	9+9V	2.5AT
D3054	115+115V	12+12V	2AT
D3055	115+115V	15+15V	1.6AT

Please see sheets 3 and 4 for dimensions, pin outs and connection information.

DAGNALL ELECTRONICS LIMITED

Shuttleworth Road, Elms Industrial Estate, Bedford. MK41 0EP UK

TEL +44(0)1234 330077 FAX +44(0)1234 330088

E-mail sales@dagnall-electronics.com


Issue 1. 19/08/03

3 of 4


PRODUCT DATASHEET

50VA CHASSIS MOUNTED TRANSFORMER

Outline Drawing 230V Version

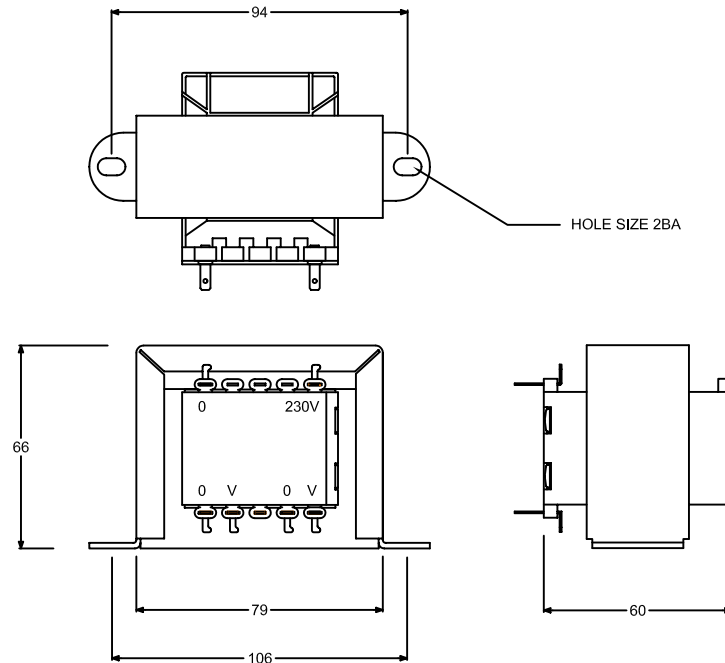

Outline Drawing Dual 115V Version

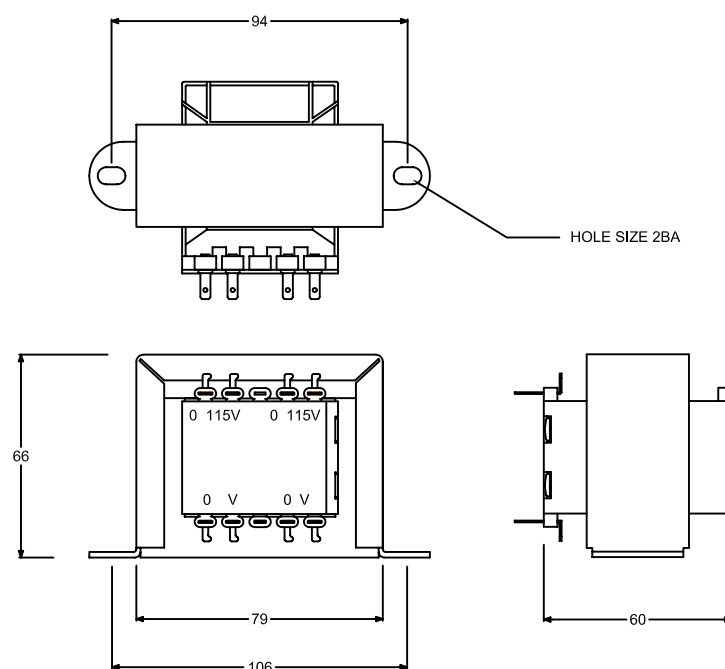

DAGNALL ELECTRONICS LIMITED

Shuttleworth Road, Elms Industrial Estate, Bedford. MK41 0EP UK

TEL +44(0)1234 330077 FAX +44(0)1234 330088

E-mail sales@dagnall-electronics.com


Issue 1. 19/08/03

4 of 4


PRODUCT DATASHEET

50VA CHASSIS MOUNTED TRANSFORMER

Connection Diagrams for D3048

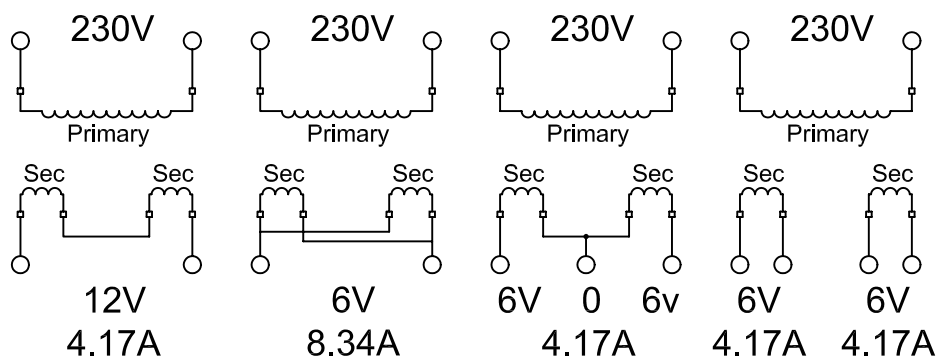

Connection Diagrams for D3052 - 230V supply

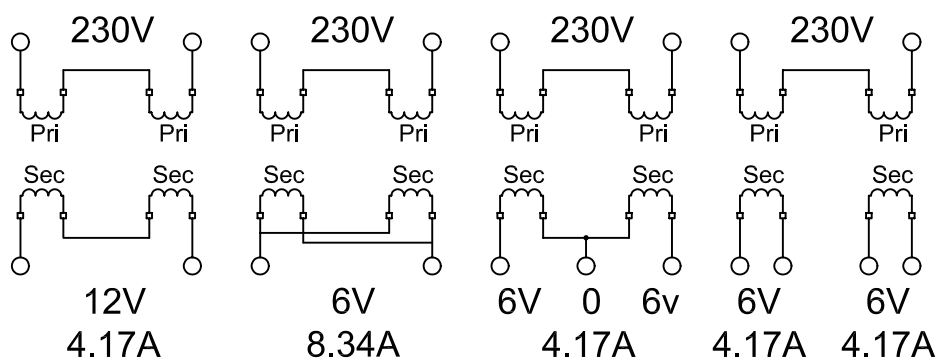

Connection Diagrams for D3052 - 115V supply

