


GSD

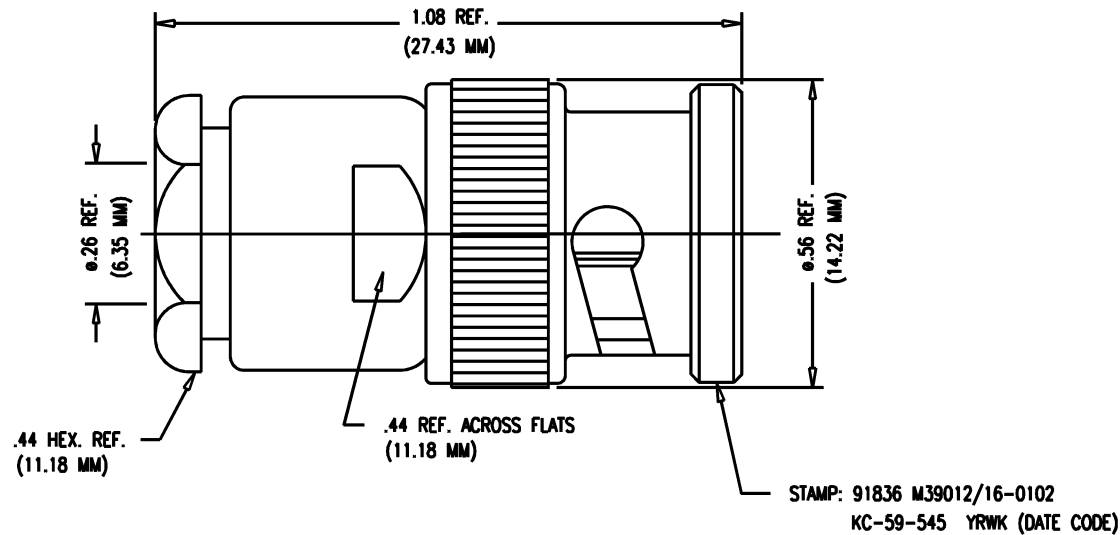

NOTES:

1. FOR USE WITH RG-59, 62, 71, 140 & 210/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-1050.
3. INTERFACE PER MIL-STD-348, FIG. 301-1.
4. MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKETS: SILICONE RUBBER, ZZ-R-765
SPRING WASHER: BER. COPPER, ASTM-B-194
ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
CENTER CONTACT: GOLD PLATE, PER MIL-G-45204.
ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

GSD

M39012/16-0102

REVISIONS	
ISSUE	CHANGES
4	CN 37541 C REDRAWN JW 01/15/98
KC59545S	
SCALE 4:1	
APPROX SURFACE AREA	
KC-59-545	
USED ON	
REF:	
BNC, PLUG	
DRAWN MARTHA	DATE 12/21/81
DESIGN MJB	DATE 12/21/81
APPR.	DATE
KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
M39012/16-0102	