




KF66X Series High Density Right Angle PCB Mount with Ferrite

KF66X Series Dimensions

Pictured with Board Lock Option, Dimensions in mm

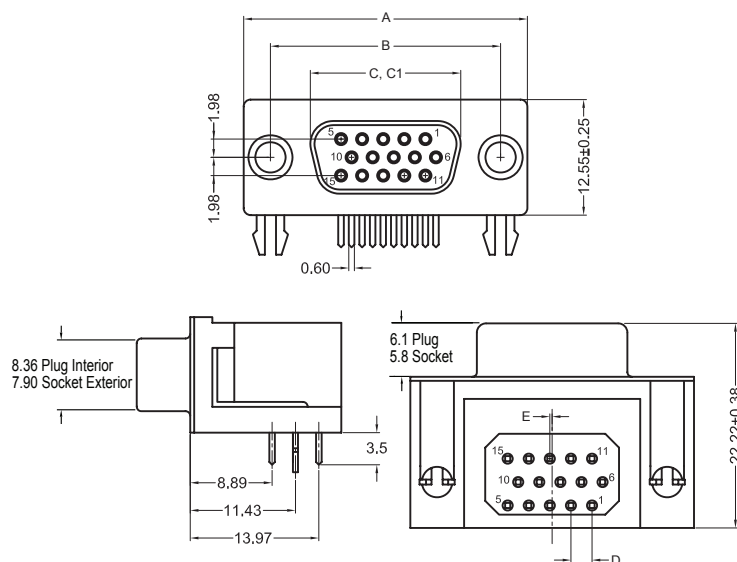

Shell Size	A	B	C	C1	D	E
	±.015	±.005	±.010	±.010	±.005	±.005
	±0.38	±0.13	±0.25	±0.25	±0.13	±0.13
15 (E)	1.213	.984	.643	.666	.090	.010
	30.81	24.99	16.33	16.92	2.29	0.25
26 (A)	1.541	1.312	.971	.994	.090	.020
	39.14	33.32	24.66	25.25	2.29	0.51
44 (B)	2.088	1.852	1.511	1.534	.090	.020
	53.04	47.04	38.38	38.96	2.29	0.51
62 (C)	2.729	2.500	2.159	2.182	.095	.023
	69.32	63.50	54.84	55.42	2.41	0.58

C = Exterior of Female Shell (S) C1 = Interior of Male Shell (P)

Note: Please check D and E dimensions on 62 contacts.

FERRITE D-SUBMINIATURE

KF66X Series

Documentation & Ordering Information

Kycon Part

Part Number Builder

Series	Shell Size	Contact Type	PCB Mounting Option	Front Panel Mounting Option	Plating Option	VESA Option
--------	------------	--------------	---------------------	-----------------------------	----------------	-------------

Series

KF66X - High Density D-Subminiature Connector, Right Angle PCB Termination, .350" Footprint, with Ferrite

Shell Size-Contact Option

E - 15 Contacts

A - 26 Contacts

B - 44 Contacts

C - 62 Contacts


Contact Type

P - Pin Contact (Plug)

S - Socket Contact (Receptacle)


PC Board Mounting Option

N Option



Front Panel Mounting Option

Standard J Option



Plating Option

Blank - Gold Flash

30 - 30μ" Gold

VESA Option

Blank - Gold Flash

VESA - VESA Compliant Version (E15S Only)

Contact Kycon for other options

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[KF66X-A26S-N](#) [KF66X-A26S-NJ](#) [KF66X-B44S-N](#) [KF66X-B44S-NJ](#) [KF66X-A26P-N30](#) [KF66X-B44P-NJ30](#) [KF66X-C62P-NJ](#) [KF66X-C62S-N](#) [KF66X-C62S-NJ](#) [KF66X-B44S-N30](#) [KF66X-A26P-NJ30](#) [KF66X-E15S-NJ30](#) [KF66X-C62P-N30](#) [KF66X-A26S-N30](#) [KF66X-C62P-N](#) [KF66X-C62S-N30](#) [KF66X-A26S-NJ30](#) [KF66X-E15P-N30](#) [KF66X-B44S-NJ30](#) [KF66X-C62S-NJ30](#) [KF66X-B44P-NJ](#) [KF66X-B44P-N30](#) [KF66X-E15S-N30](#) [KF66X-C62P-NJ30](#) [KF66X-E15P-NJ30](#)