

INTEGRATED CONNECTOR MODULES

10/100Base-TX belStick™ with LEDs

BM01812


- Quad port shielded RJ-45 connector with integrated 10/100 magnetics
- Compatible with a variety of 10/100 transceiver ICs
- Operating temperature 0° to +70° C
- Storage temperature -40° to +85° C
- 0810-1X4T-06 design supports AutoMDIX applications
- Complies with IEEE standards and all 10/100 Ethernet specifications including 350μH with 8mA DC bias
- Integrated design conserves valuable board space
- Minimum interwinding breakdown voltage of 1500 Vrms
- Adaptable, modular design provides higher reliability
- Reduced pin count for improved crosstalk and optimum PCB trace routing

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Insertion Loss dB max	Return Loss dB min			Common to Differential Mode Rejection dB min	Common to Common Mode Rejection dB min	Crosstalk dB min			
	1MHz to 100MHz	1MHz to 30MHz	30MHz to 60MHz	60MHz to 80MHz	100kHz to 100MHz		1MHz	30MHz	50MHz	100MHz
0810-1X4T-03	-1.0	-18	18 - 20 log (f/30MHz)	-12	-40	-30	-70	-45	-40	-35
0810-1X4T-04	-1.0	-18	18 - 20 log (f/30MHz)	-12	-40	-30	-70	-45	-40	-35
0810-1X4T-06	-1.0	-18	18 - 20 log (f/30MHz)	-12	-40	-30	-70	-45	-40	-35

SCHEMATIC

0810-1X4T-03

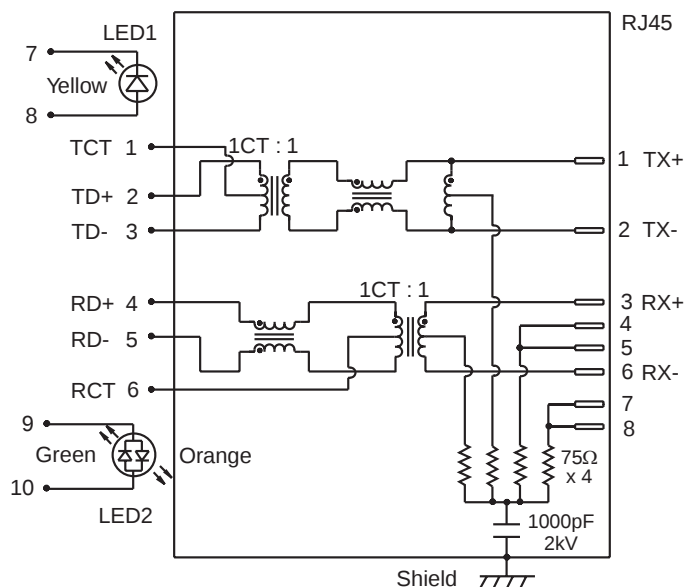


Available Options


- Various transformer turns ratios
- Various high voltage capacitor values
- Various LED color combinations

SCHEMATIC

0810-1X4T-04

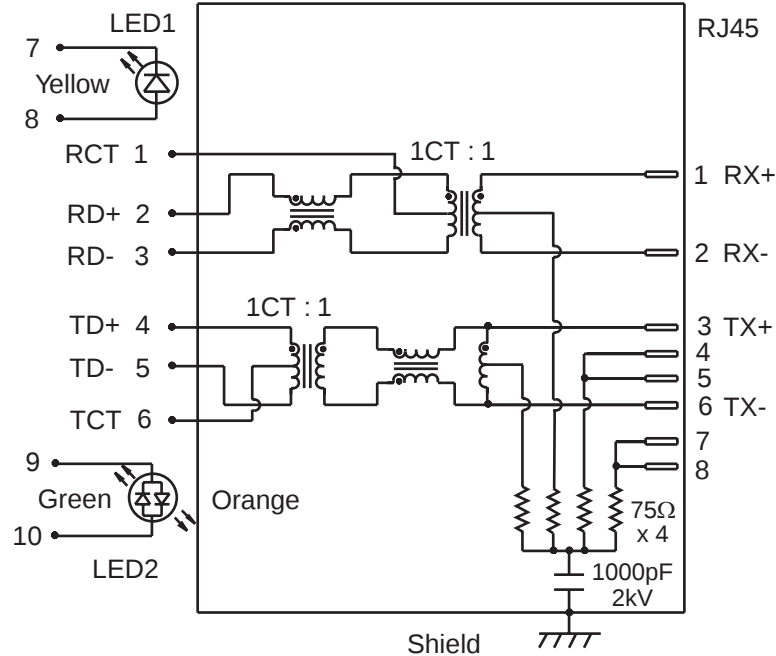

0810-1X4T-06

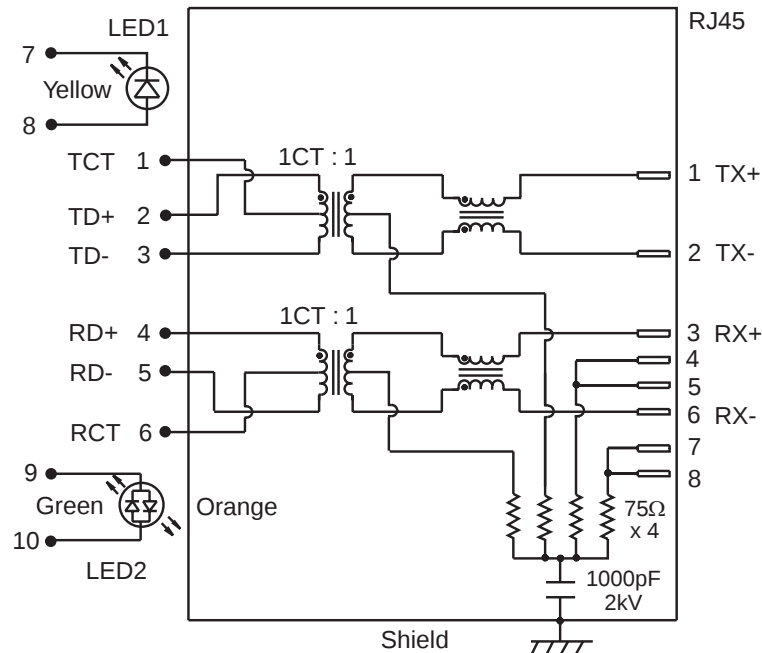

INTEGRATED CONNECTOR MODULES

10/100Base-TX belStick™ with LEDs

bel


BM01812

MECHANICAL

0810-1X4T-03

0810-1X4T-04

0810-1X4T-06

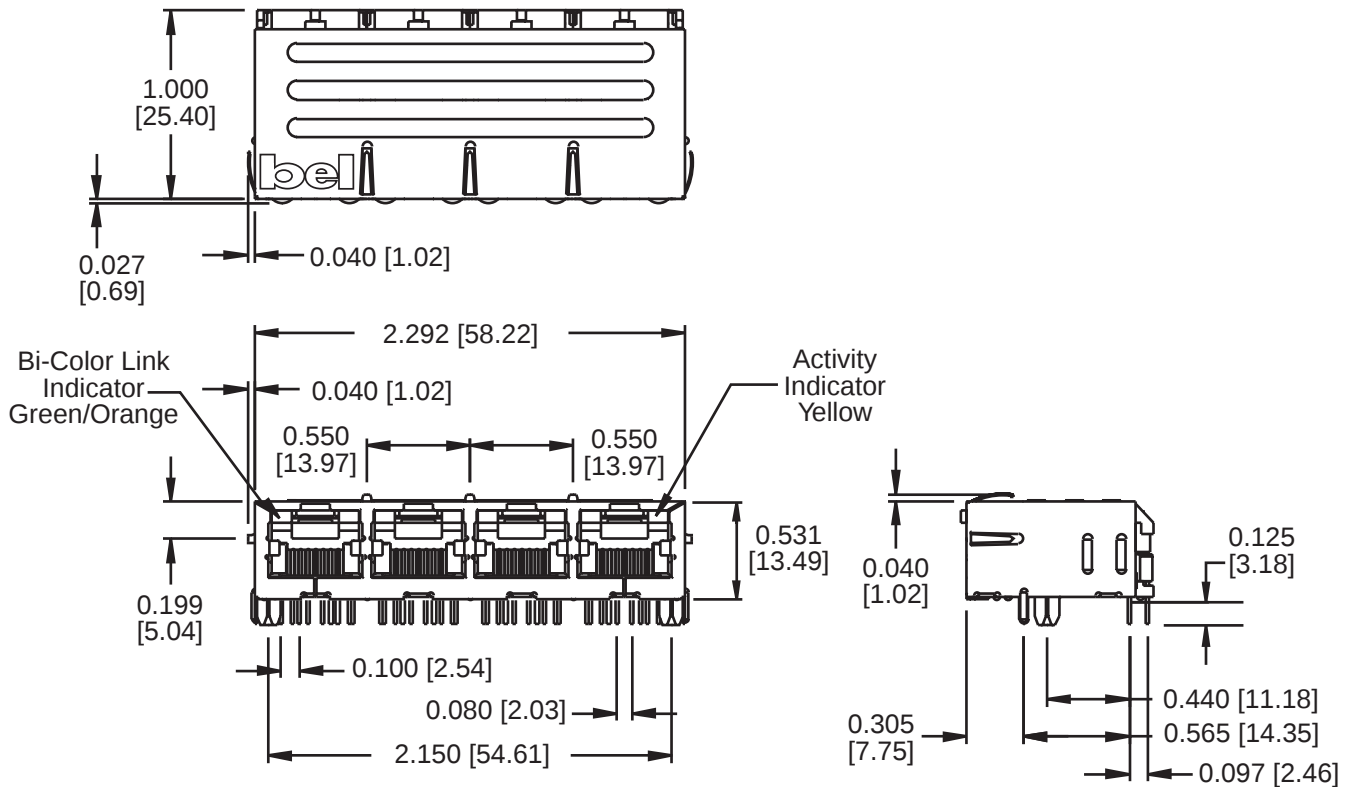

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.010 [0.25] unless otherwise noted.

Notes


Plastic Housing	Thermoplastic, flammability rating UL 94V-0
Contacts	50 micro-inch hard gold plating
Pins	Tin-coated copper wire, DIA 0.018" [0.46]
Solderability	Per MIL Std. 202, Method 208
Metal Shield	Nickel plated copper alloy

INTEGRATED CONNECTOR MODULES


10/100Base-TX belStick™ with LEDs

PAD LAYOUT

0810-1X4T-03
0810-1X4T-04
0810-1X4T-06

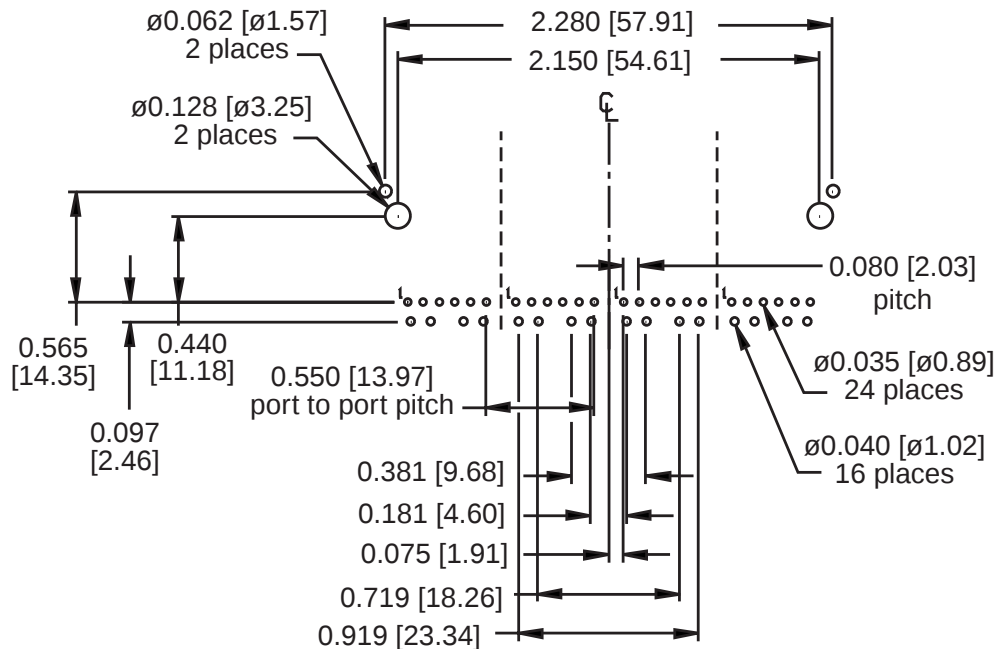

Suggested PCB Pad Layout
Component Side View

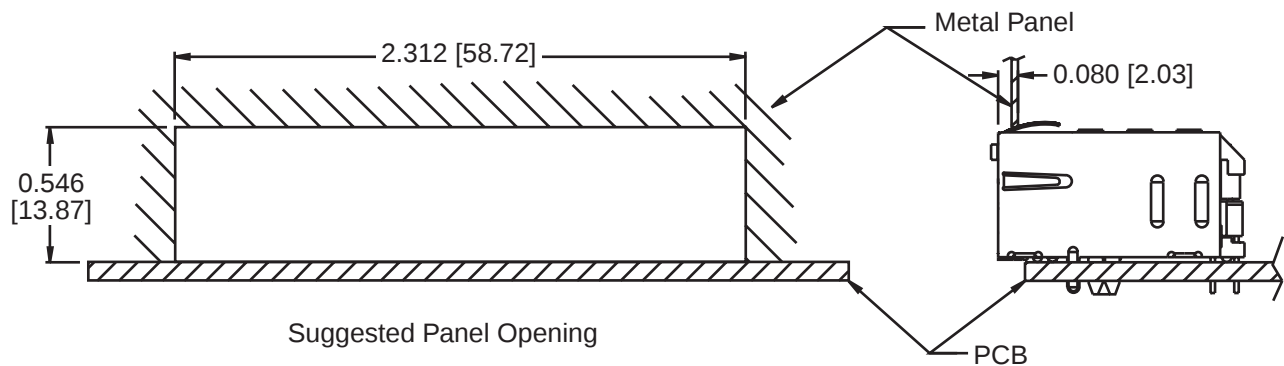

Suggested Panel Opening

©2001 Bel Fuse Inc. Specifications subject to change without notice. 11.01

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com