
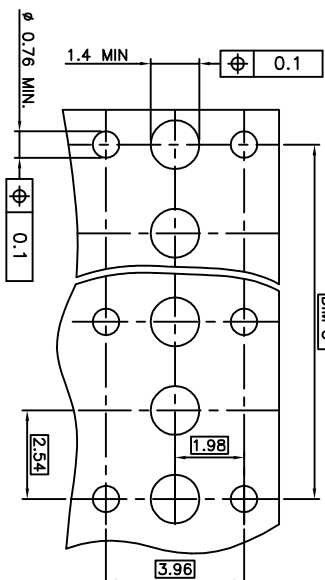


RECOMMENDED HOLES PATTERN

RECOMMENDED PC BOARD THICKNESS: 1.6 mm

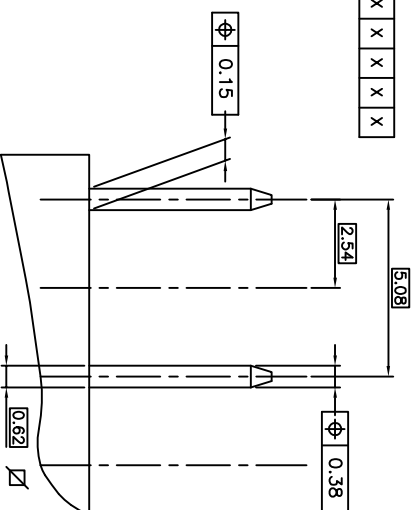



				CONTACT PLACED IN CAVITY (TABLE ACCORDING VIEW A)																												
PRODUCT N°	HOUSING	DIM"C"	DIM"D"	NB. OF TER.																												
					1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
95234-Y01LF	1 X 28 pos.	68.58	71.04	14	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
95234-Y02LF	1 X 13 pos.	30.48	32.94	10	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
95234-Y03LF	1 X 3 pos.	5.08	7.54	2	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
95234-Y04LF	1 X 7 pos.	15.24	17.70	4	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
95234-Y05LF	1 X 4 pos.	7.62	10.08	2	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
95234-Y06LF	1 X 14 pos.	33.02	35.48	10	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
					5.08																											

RoHS COMPATIBLE.
SEE NOTE 4

RECOMMENDED PINS PATTERN

NOTES:

- 1 - MATERIAL HOUSING: THERMOPLASTIC POLYESTER 70% GLASS FILLED, COLOR BLUE, FLAME RETARDANT PER UL-94 CATEGORY VO.
 - 2 - MATERIAL TERMINAL: PHOSPHOR BRONZE EXTRA HARD.
 - 3 - CONNECTOR TO BE USED ON PC BOARD WITH NON PLATED THROUGH HOLES
 - 4 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
- a - PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE, 24um MINIMUM MATTE TIN OVER 1.27um MINIMUM NICKEL UNDERPLATE.
- b - MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
- c - LABELING:
- MEETS PACKAGING SPECS AS PER GS-14-920
- d - LEGAL STATEMENT: SEE GS-47-0004

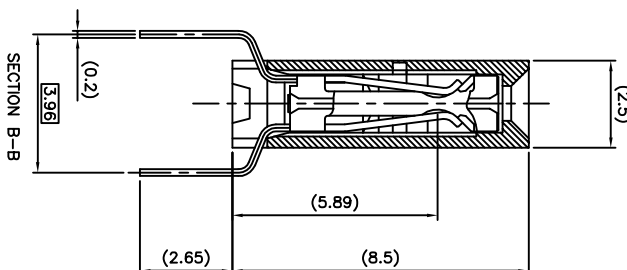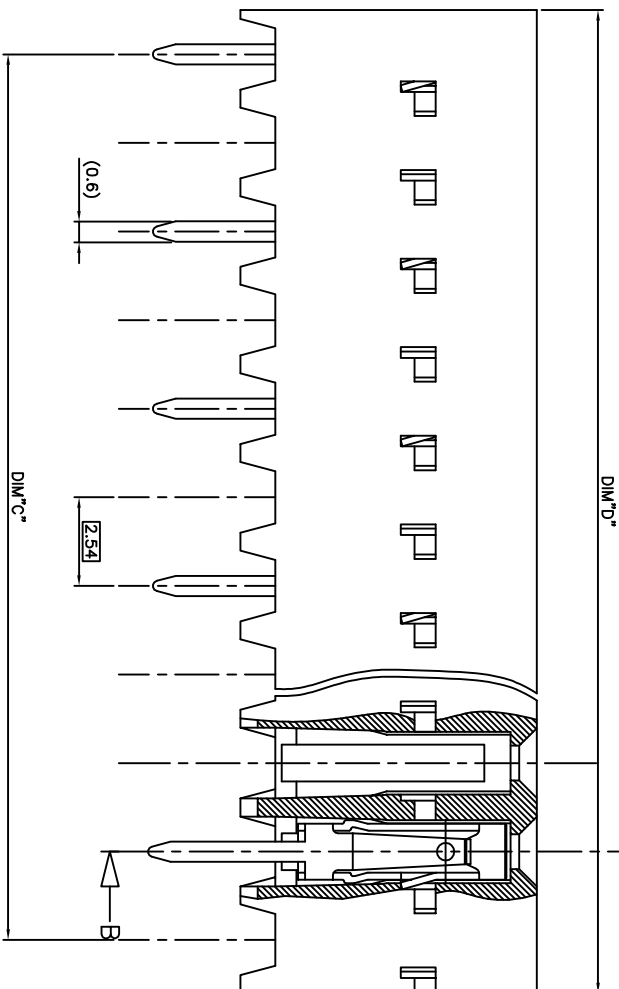

SECTION B-B

95234-4XXLF	5 µm Sn	Sn
95234-3XXLF	0.76 µm GOLD	Sn
PLATING CODE	CONTACT AREA	SOLDER TAIL
	PLATING THICKNESS OVER 1.27µm IN	

mat'l. code		surface		tolerance		projection		product family	
SEE NOTES		ISO 1992		ISO 406		ISO 10		DX VCC SR	
lit	ecp no dr	date	inherence	unless otherwise specified	angle	lineart	mm	DUAL ENTRY S.L.	
H	F07-027(LMU)	07/12/06			±0.3			OFF SET LEGS	
J	B-16001(LMU)	13/10/04			±0.3			sheet 1 of 1	
K	B-16504(LMU)	14/09/08			±0.3			95234	
L	B-19123(LMU)	14/02/11			±0.3			CUSTOMER Drawing	
Engl	P.NUZZI	95/11/17			±0.3				
F	T04-034(DLE)	04/11/15			±0.3				
Q	F06-020(DLE)	06/06/28			±0.3				
sheet	revision								
index	sheet								