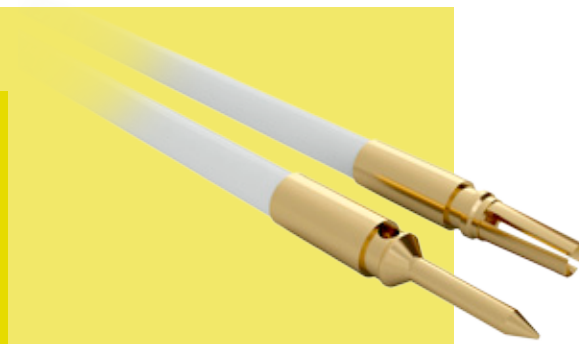







# Gecko Connectors

## Cable Connectors – Individual Contacts

- ❖ 4-finger Beryllium Copper contact on a female connector.
- ❖ Ready for assembling to housings on page 8.
- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.



GECKO

|                                                                                     |                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FEMALE SINGLE ENDED</b>                                                          | <b>FEMALE – FEMALE</b>                                                                                                                                                                                |
|    |                                                                                                                     |
| <b>MALE SINGLE ENDED</b>                                                            | <b>MALE – MALE</b>                                                                                                                                                                                    |
|   |                                                                                                                    |
| <b>MALE – FEMALE</b>                                                                | <b>TOOLS</b>                                                                                                                                                                                          |
|  | <b>Contact Insertion/Removal Tool</b> – Z125-902<br>See page 12<br>❖ Instruction sheets available at <a href="http://www.harwin.com/downloads/instructions">www.harwin.com/downloads/instructions</a> |

### HOW TO ORDER

**G125 - X WX XXXX X 94**

#### SERIES CODE

#### GENDER – FIRST END

|          |        |
|----------|--------|
| <b>M</b> | Male   |
| <b>F</b> | Female |

#### CABLE SIZE

|           |        |
|-----------|--------|
| <b>W1</b> | 26 AWG |
| <b>W2</b> | 28 AWG |
| <b>W3</b> | 30 AWG |
| <b>W4</b> | 32 AWG |

#### CABLE COLOUR

|           |       |
|-----------|-------|
| <b>94</b> | White |
|-----------|-------|

#### TERMINATION – SECOND END

|          |               |
|----------|---------------|
| <b>L</b> | Loose cut end |
| <b>F</b> | Female        |
| <b>M</b> | Male          |

#### CABLE LENGTH

|             |                      |
|-------------|----------------------|
| <b>0150</b> | 150mm                |
| <b>0300</b> | 300mm (double-ended) |
| <b>0450</b> | 450mm (single-ended) |

All dimensions in mm.

Patent Pending – UK 1205109.0