

Dura-Lag

Dual-Element, Time-Delay Construction Grade Fuses

Class RK5 – 250 Volt, $\frac{1}{10}$ -600 Amps

DLN-R








Catalog Symbol: DLN-R
 Current-Limiting
 Dual-Element, Time-Delay – 10 seconds (minimum)
 at 500% rated current
 Electrical Rating: 250 Volts AC (or less)
 Self-Certified for DC under UL 198L
 125 VDC ($\frac{1}{10}$ -60A)
 250 VDC (70-600A)
 Interrupting Rating: 200,000A RMS Symmetrical
 20,000A DC
 Agency Approvals:
 UL Listed, Std. 248-12, Class RK5, Guide 198E, File E4273
 CSA Certified, C22.2 No. 248.12, Class 1422-02, File 53787

Catalog Numbers

DLN-R-1	DLN-R-15	DLN-R-100
DLN-R-2	DLN-R-20	DLN-R-125
DLN-R-2½	DLN-R-25	DLN-R-150
DLN-R-3	DLN-R-30	DLN-R-175
DLN-R-3¾	DLN-R-35	DLN-R-200
DLN-R-4	DLN-R-40	DLN-R-225
DLN-R-5	DLN-R-45	DLN-R-250
DLN-R-6	DLN-R-50	DLN-R-300
DLN-R-6¾	DLN-R-60	DLN-R-400
DLN-R-8	DLN-R-70	DLN-R-600
DLN-R-10	DLN-R-80	—
DLN-R-12	DLN-R-90	—

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

Dimensional Data

 **$\frac{1}{10}$ A to 30A****35A to 60A****70A to 100A****110A to 200A****225A to 400A****450A to 600A**

- Designed for contractor needs.
- Protects industrial equipment and large motors.
- Recommended for AC power distribution system mains, feeders and branch circuits.
- Industry standard time-delay of 10 seconds at 5 times the fuse rating.

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
$\frac{1}{10}$ -30	10	0.56	0.252
35-60	10	1.38	0.621
70-100	5	1.56	0.702
110-200	1	0.90	0.405
225-400	1	1.80	0.810
450-600	1	3.30	1.485

*Weight per carton.

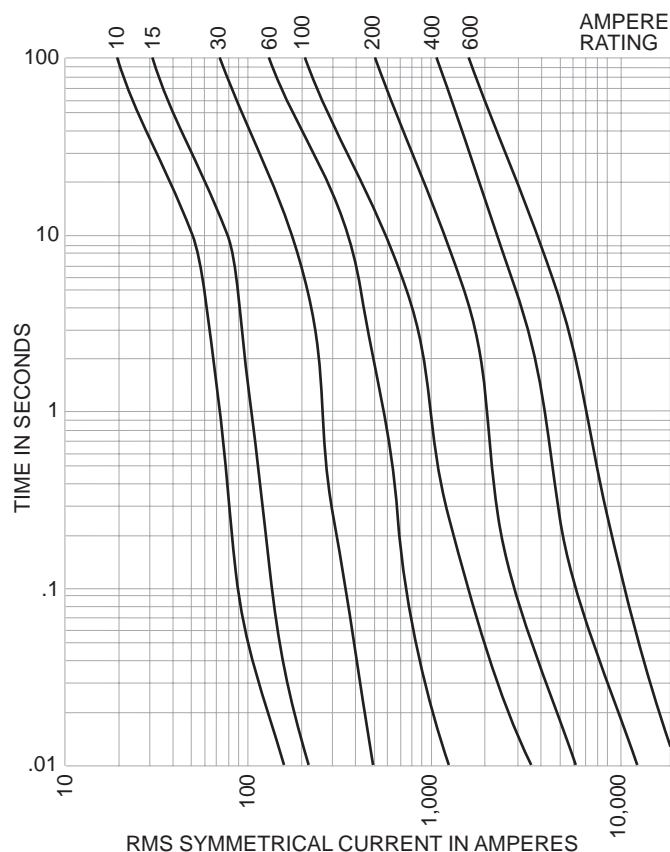
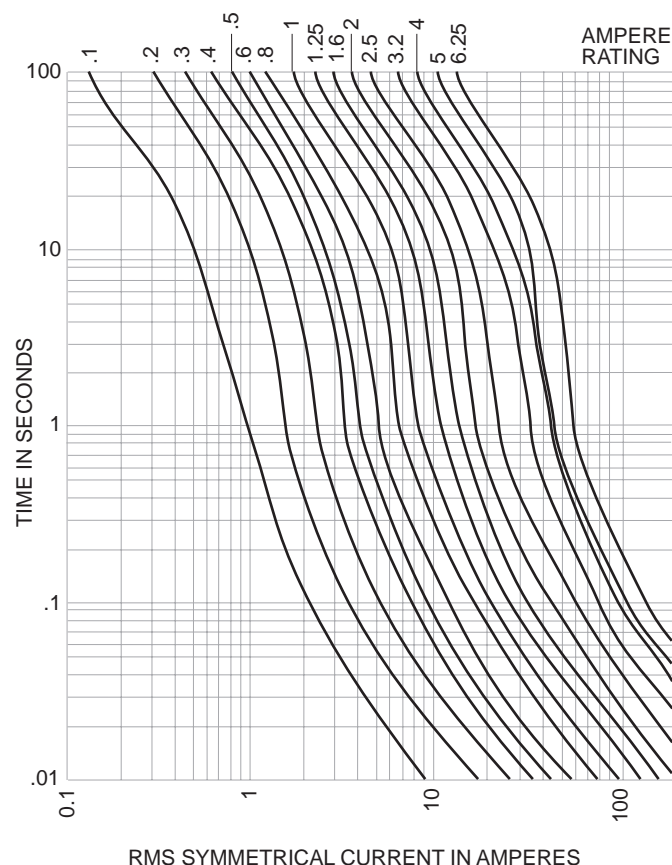
Dura-Lag

Dual-Element, Time-Delay Construction Grade Fuses

Class RK5 – 250 Volt, $\frac{1}{10}$ -600 Amps

DLN-R

Time-Current Characteristic Curves–Average Melt



The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.