



**Fair-Rite Products Corp.**

Your Signal Solution®

## Beads- on- Leads (2743003111)



Part Number: 2743003111

### 43 BEAD ON LEAD

#### Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 2 = Taped and Reeled

**Ferrite suppression beads are supplied assembled on tinned copper wire for automated circuit board assembly.**

– Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating. The resistance of the wire is 3.5 mOhm for the 22 AWG and 2.2 mOhm for the 20 AWG wire.


#### Packaging Options:

– Beads- on- leads can be supplied bulk packed. The last digit of bulk packed parts is a “1”. Parts with a “2” as the last digit of the part number are supplied taped and reeled per IEC 60286-1 and EIA RS-296- F standards. Taped and reeled parts are supplied 4500 pieces on a 14" reel. Taping details: Component pitch 5 mm. Inside tape spacing 52.5 mm. Tape width 6 mm.  
– Our “Bead- on- Lead Suppression Kit” (part number 0199000028) is available for prototype evaluation.

**For any bead- on lead requirement not listed here, feel free to contact our customer service group for availability and pricing.**

Weight: 0.5 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.5	$\pm 0.25$	0.138	—
B	62	$\pm 1.50$	0.244	—
C	6.7	$\pm 0.25$	0.263	—
D	0.65	—	0	22 AWG

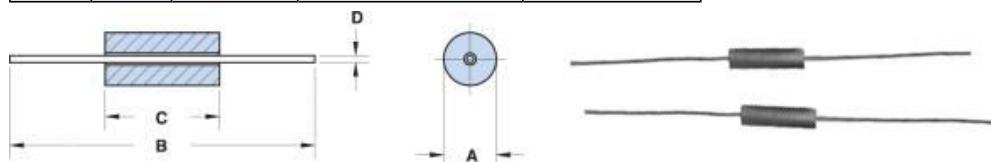


#### **Chart Legend**


+ Test frequency

Typical Impedance ( $\Omega$ )	
10 MHz	44
25 MHz <sup>+</sup>	65
100 MHz <sup>+</sup>	100
250 MHz	101

2743003111

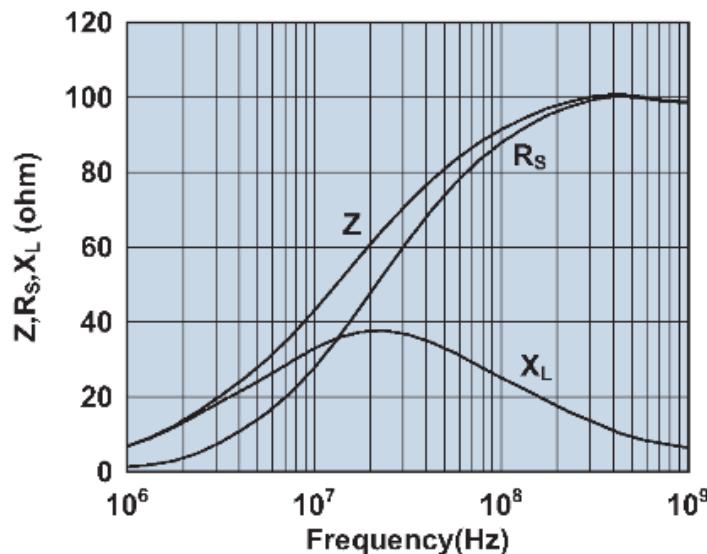

Impedance, reactance, and resistance vs. frequency.

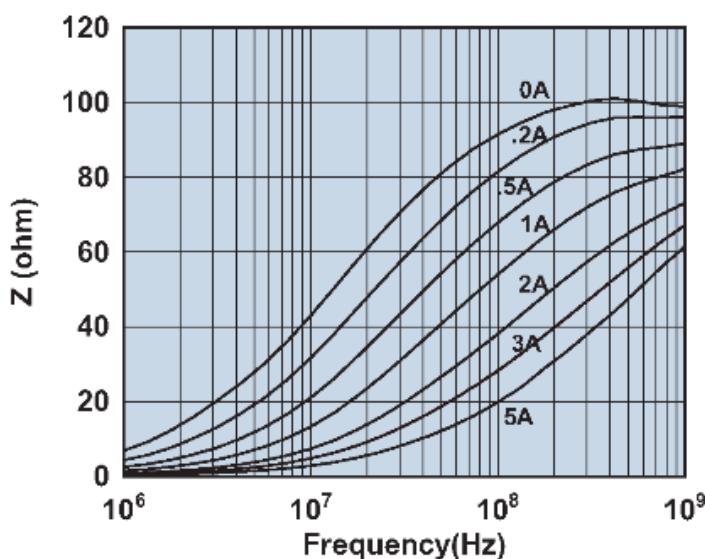

Impedance vs. frequency with dc bias.

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)