

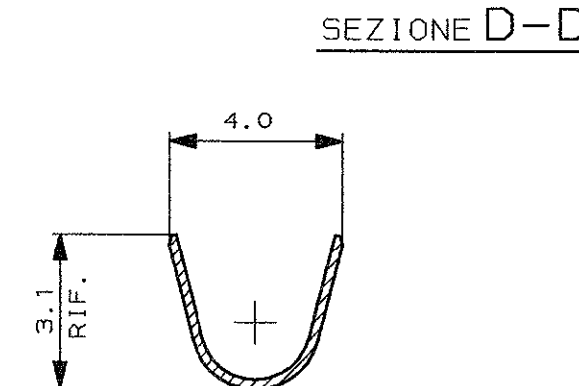
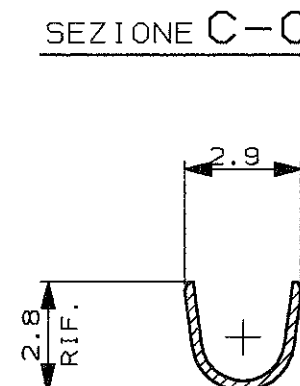
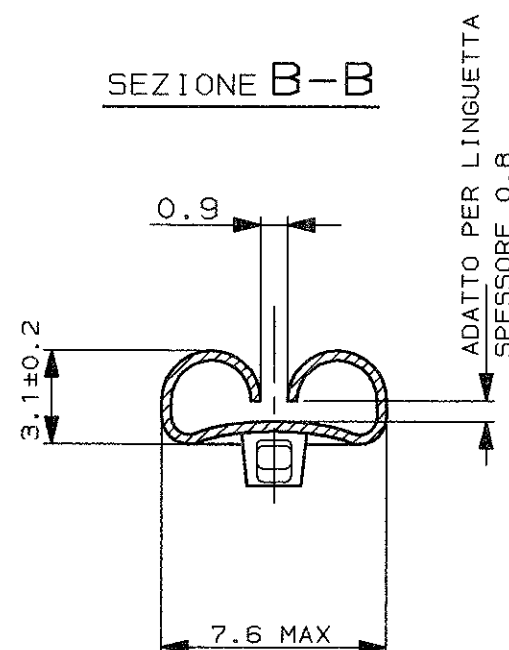


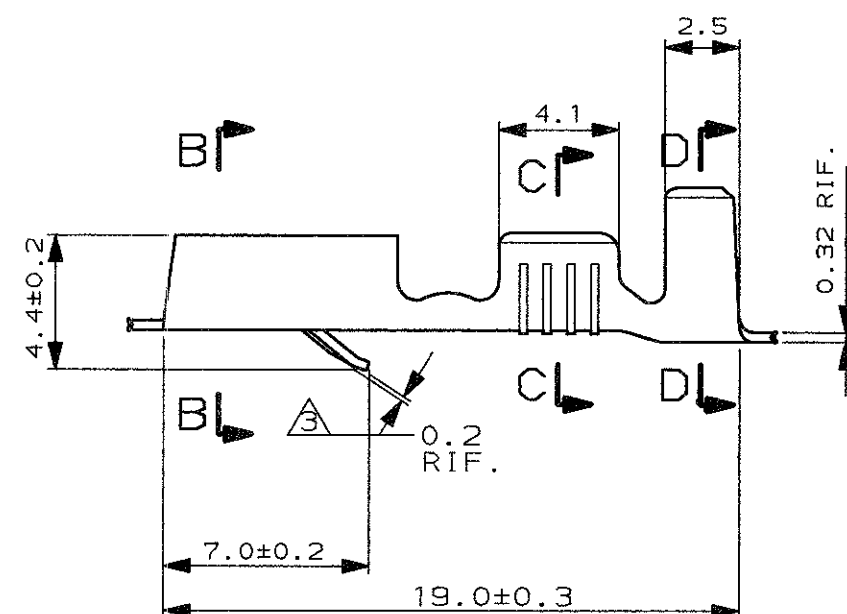

1) SPECIFICA DI PRODOTTO : 108-20020 ; SPECIFICA DI APPLICAZIONE : 114-20021
(PRODUCT SPEC. : 108-20020 ; APPLICATION SPEC. : 114-20021)

2) BOBINATO SU BOBINA DA 12" IN CARTONE CON CARTA INTERPOSTA
(REELED ON 12" CARTON TYPE REEL WITH INTERLAYER PAPER STRIP)

3 NERVATURA DI RINFORZO
(BEAT IN LOCKING LANCE)

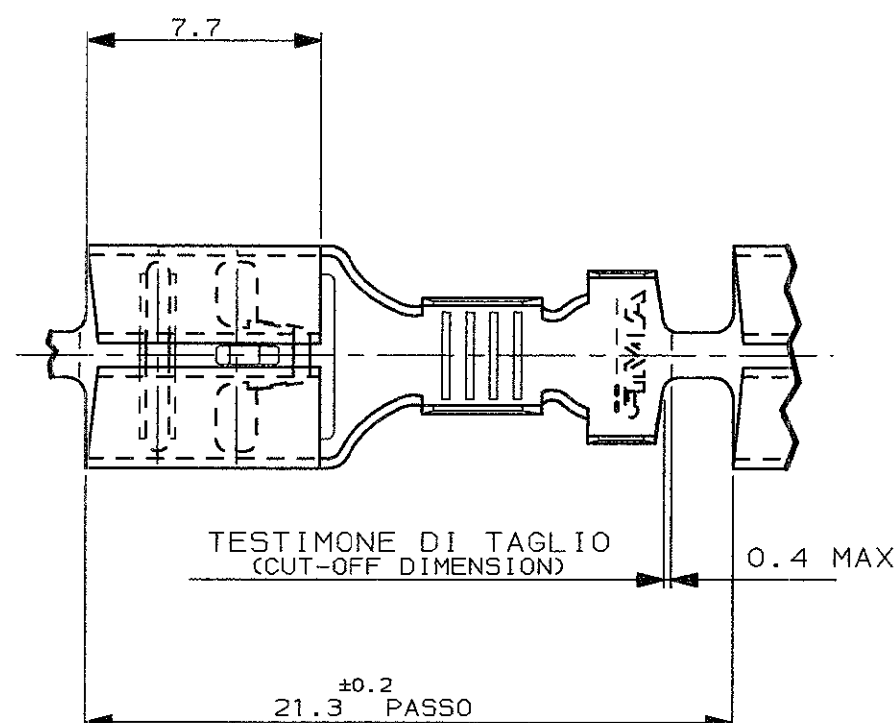

SENDO DI USCITA
DEL TERMINALE DALLA BOBINA
(DIRECTION OFF
TOP OF REEL)

(WIRE) SEZ. FILO mm ²	(INS. DIA. REDUCED) Ø IS. RID. FASE 3
0.5	1.5-1.7
0.75	1.7-1.9
0.3	1.45-1.55 STD. INS. CABLE

4

PRE-STAGNATO	OTTONE	282178-1
FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (PART NUMBER)

CUSTOMER DWG. FOR REFERENCE ONLY DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

THIS DRAWING IS UNPUBLISHED RELEASE FOR PUBLICATION 19

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE)	SCALA (SCALE)
± 0.3	1.45-1.9 mm	0.3-0.8 mm ²	4:1

ANGOLI (ANGLES) ± 2°
DIS. 27 SEPT. 90
CONT. VERGANO P.
CONT. VERGANO P.
CONT. VERGANO P.

DESCRIZIONE (DESCRIPTION) FASTIN-FASTON Connector .250"sr. REC. CONTACT (FOR REDUCED INS. CABLE)

LOC. SIZE NUMERO (DWG NO)	REV.	FOGLIO (SHEET)
I A3	D	1

REV.	REVISIONI (REVISION RECORD)	DIS. DATA (DR) (DATE)
D	CHANGED RAW MAT'L AND PACKAGING ET00-0050-00	31-05-2000
C	REVISED, ET00-0319-97	A.P. 05-05-1997
A	IN PRODUZIONE (ECN I-2838)	10/5/91