


8714 CV

Max. 650 mA

CHARGERS FOR LEAD ACID BATTERIES

- Konstantspenningslader for blybatterier
- Maks. ladestrøm 650 mA
- Egnet for lading av mindre forseglede blybatterier, f.eks. 2,5-6 Ah
- Lineær
- Termosikring i transformator, termisk beskyttelse i regulator, polvendings- og kortslutningssikker
- Plugg-inn enhet
- Lysdiode indikerer lading
- Kan leveres med medisinsk godkjenning (EN 60601) på forespørsel
- Utskiftbare DC plugger
- Constant voltage charger for lead acid batteries
- Max. charge current 650 mA
- Suitable for charging of small, sealed lead acid batteries, e.g. 2,5-6 Ah
- Linear
- Thermal fuse in transformer, thermal protection in regulator, protected against reversed polarity and short circuit proof
- Plug-in unit
- LED indicates charging
- Available with medical approved (EN 60601) upon request
- Exchangeable DC plugs



Tekniske data

Inngangsspenning:

Ladespenning:

Ladestrøm:

Strømtrekk fra batteri

ved frakoblet nett:

Temperaturområde:

Strømbegrensning:

Isolasjonsklasse:

Elektrisk sikkerhetsstandard:

EMC standarder

• Emisjon:

• Immunitet:

Utgangsterminaler

• Sek. ledning med/uten plugg:

Mål uten plugg (LxBxH):

Vekt:

Technical specifications

Input voltage:

Charging voltage:

Charge current:

Leakage current from battery

when mains switched off:

Temperature range:

Current limiting:

Insulation class:

Electrical safety standard:

EMC standards

• Emission:

• Immunity:

Output terminals

• Cord with/without plug:

Dimensions without plug (LxWxH):

Weight:

230 VAC +6/-10%, 50/60Hz

14,9 VDC *

Max. 650 mA

< 0,1 mA

-10°C - +40°C

650 mA

II

EN 60065, EN 60950

EN 61000-6-3

EN 61000-6-1

Tilbehør / Accessories

100 x 51 x 63 mm


450 g

* Enheten er innvendig justerbar og ved vedlikeholdslading bør spenningen justeres ned til 13,6-13,9 V. Det er vanligvis anbefalt å lade 12 V blybatterier med 14,6-15 V ved daglig bruk. Skulle det være usikkerhet m.h.t. et bestemt batteri, anbefaler vi at man kontakter batteriproducent eller leverandør. Kan på bestilling leveres med andre utgangsspenninger.

* The unit is internally adjustable and at float charge the voltage should be adjusted to 13,6-13,9 V. In cycle use it's normally recommended to charge 12 V batteries with 14,6-15 V. If there should be any doubt about the charging condition for a particular battery, contact the battery manufacturer or supplier for more information.

Can on request be delivered with other output voltages.

Lade karakteristikk Charging characteristics

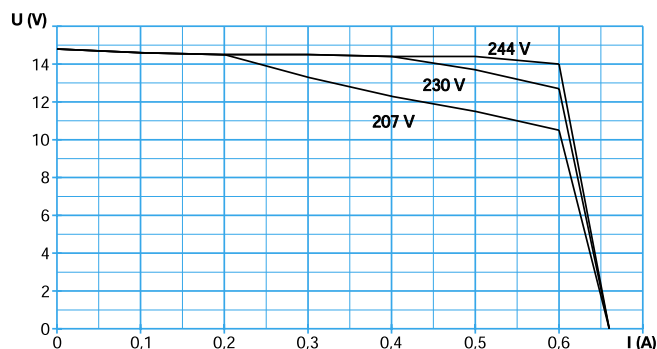

23052006

www.mascot.no
sales@mascot.no
Phone:
Fax:

Main Office
PO Box 177
N-1601 FREDRIKSTAD
NORWAY
+47 69 36 43 00
+47 69 36 43 01

Mascot UK
Box 2090, Salisbury
Wiltshire SP2 2BH
UK
+44 1722 504 853
+44 845 299 1210

Mascot DE-AT-CH-BENELUX
Hirschbergstr. 28/7
D-74838 LIMBACH
GERMANY
+49 6287 95140
+49 6287 95141

Tettanger Str. 52
D-88239 WANGEN
GERMANY
+49 7528 95 16 77
+49 7528 95 16 78

Mascot France
38 rue Leo Lagrange
94270 Le Kremlin Bicêtre
FRANCE
+33 1 46 58 71 85
+33 1 46 58 71 85