

MN101D03A , MN101D03D

Type	MN101D03A (under planning)	MN101D03D
ROM (x8-bit)	32 K	64 K
RAM (x8-bit)	1 K	2 K
Package	LQFP080-P-1414A	
Minimum Instruction Execution Time	0.10 μ s (at 4.5 V to 5.5 V, 20 MHz) 0.238 μ s (at 2.7 V to 5.5 V, 8.39 MHz)* ¹ 125 μ s (at 2.0 V to 5.5 V, 32 kHz)* ² * ¹ The lower limit for operation guarantee for flash memory built-in type is 4.5 V. * ² The lower limit for operation guarantee for EPROM built-in type is 2.3 V.	
Interrupts	• RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • External 5 • External 6 • External 7 • Timer 0 • Timer 1 • Timer 2 • Timer 3 • Timer 4 • Timer 5 • Timer 6 • Time base • Timer 7 (2 systems) • Timer 8 (2 systems) • Serial 0 reception • Serial 0 transmission • Serial 1 • Serial 2 • Automatic transfer finish • A/D conversion finish • Key interrupts (8 lines)	
Timer Counter	Timer counter 0 : 8-bit $\times$ 1 (square-wave output [timer pulse output], PWM output, event count, remote control carrier output, simple pulse width measurement function) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Timer counter 1 : 8-bit $\times$ 1 (square-wave output [timer pulse output], event count, timer synchronous output) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Timer counter 0, 1 can be cascade-connected. Timer counter 2 : 8-bit $\times$ 1 (square-wave output [timer pulse output], PWM output, event count, timer synchronous output, simple pulse width measurement function) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Timer counter 3 : 8-bit $\times$ 1 (square-wave output [timer pulse output], event count, remote control carrier output) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Timer counter 2, 3 can be cascade-connected. Timer counter 4 : 8-bit $\times$ 1 (square-wave output [timer pulse output], PWM output, event count, simple pulse width measurement function) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Timer counter 5 : 8-bit $\times$ 1 (square-wave output [timer pulse output], event count) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Timer counter 4, 5 can be cascade-connected. Time base timer Clock source 1/2⁷, 1/2⁸, 1/2⁹, 1/2¹⁰, 1/2¹³, 1/2¹⁵ of OSC oscillation clock frequency; 1/2⁷, 1/2⁸, 1/2⁹, 1/2¹⁰, 1/2¹³, 1/2¹⁵ of XI oscillation clock frequency Timer counter 6 : 8-bit freerun timer Clock source 1/1 of system clock frequency; 1/1, 1/2⁷, 1/2¹³ of OSC oscillation clock frequency; 1/1, 1/2⁷, 1/2¹³ of XI oscillation clock frequency	

Timer Counter (Continue)	Timer counter 7 : 16-bit × 1
	Clock source either of system clock, OSC oscillation clock, external clock 1 or external clock 2 frequency-divided into 1/1, 1/2, 1/4 or 1/16) (hardware configuration) double buffer type compare register × 2 input capture register × 1 (timer functions) square-wave output (timer pulse output), high-precision PWM output (cycle/duty continuously variable), event count, simple pulse width measurement function and input capture function
	Timer counter 8 : 16-bit × 1
	Clock source either of system clock, OSC oscillation clock, external clock 1 or external clock 2 frequency-divided into 1/1, 1/2, 1/4 or 1/16) (hardware configuration) double buffer type compare register × 2 input capture register × 1 (timer functions) square-wave output (timer pulse output), PWM output (duty continuously variable), event count, simple pulse width measurement function and input capture function
	Watchdog timer
	Interrupt source runaway detection frequency selection from 1/2 ¹⁶ , 1/2 ¹⁸ and 1/2 ²⁰ of system clock frequency

Serial Interface	Serial 0 : 8-bit × 1 (full-duplex UART/ synchronous type)
	Synchronous type (MSB or LSB first selectable; 1 to 8 bits arbitrary transmission; continuous transmission, continuous reception and continuous transmission-reception possible by combination with ATC function) Transfer clock source 1/2, 1/4 of system clock frequency; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency; timer counter 2 to 5 output; 1/3 of frequency of the above clocks
	Full-duplex UART (built-in baud rate timer, parity check, overrun error/framing error detection, transfer bit selectable from 7 and 8 bits)
	Serial 1 : 8-bit × 1 (simple I ² C/ synchronous type)
	Synchronous type (MSB or LSB first selectable; 1 to 8 bits arbitrary transmission; continuous transmission, continuous reception and continuous transmission-reception possible by combination with ATC function) Transfer clock source: 1/2, 1/4 of system clock frequency; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency; timer counter 2 to 5 output; 1/3 of frequency of the above clocks Simple I ² C (I ² C transmission function with single master [9-bit transmission])
	Serial 2 : 8-bit × 1 (3-wire synchronous type)
	Synchronous type (MSB or LSB first selectable; 1 to 8 bits arbitrary transmission; continuous transmission, continuous reception and continuous transmission-reception possible by combination with ATC function) Transfer clock source 1/2, 1/4 of system clock frequency; 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency; timer counter 2 to 5 output; 1/3 of frequency of the above clocks

See the next page for electrical characteristics, pin assignment and support tool.

I/O Pins	I/O	67	• Common use • Specified pull-up resistor available • Input/output selectable (bit unit)
	Input	1	• Common use
A/D Inputs			
10-bit × 8-ch. (with S/H) Conversion Cause 7 A/D control register setting; timer 4, 6 or 8 interrupt; external interrupt 3 or 7; serial 1 interrupt			
Special Ports			
Buzzer Output, remote control carrier signal output, high-current drive port × 1			


Electrical Characteristics

Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	fosc = 20 MHz , VDD = 5 V			60	mA
	IDD2	fosc = 8.39 MHz , VDD = 5 V			25	mA
	IDD3	*fx = 32 kHz , VDD = 3 V			120	μA
Supply current at HALT	IDD4	fx = 32 kHz , VDD = 3 V , Ta = 25°C			8	μA
		fx = 32 kHz , VDD = 3 V , Ta = 85°C			20	μA
Supply current at STOP	IDD5	VDD = 5 V			10	μA

* Flash memory built-in type : 300 μA max. at VDD = 5 V

Pin Assignment

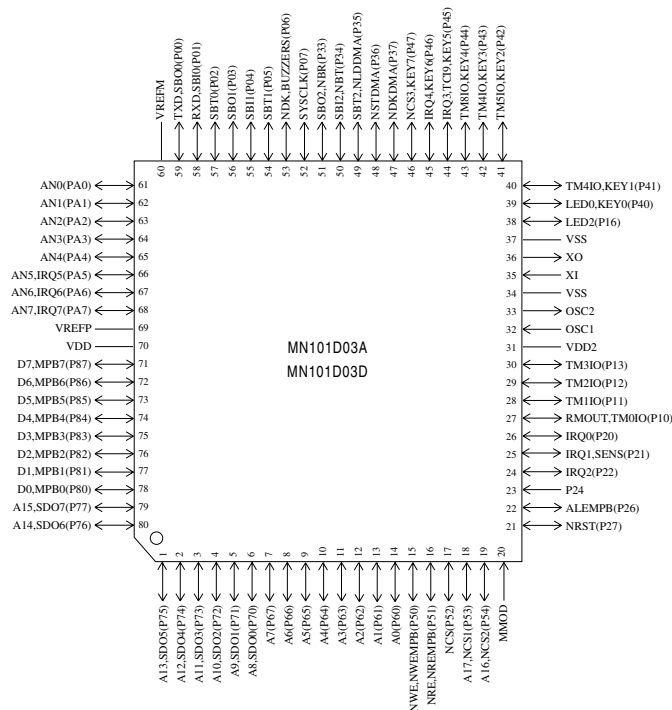

LQFP080-P-1414A

Support Tool

■ In-circuit Emulator	PX-ICE101C / D + PX-PRB101D03	
■ EPROM Built-in Type	Type	MN101DP03FAL
	ROM (× 8-bit)	96 K
	RAM (× 8-bit)	4 K
	Minimum instruction execution time	0.10 μs (at 4.5 V to 5.5 V, 20 MHz)
		0.238 μs (at 2.7 V to 5.5 V, 8.39 MHz)
		125 μs (at 2.3 V to 5.5 V, 32 kHz)
	Package	LQFP080-P-1414A
■ Flash Memory Built-in Type	Type	MN101DF03D
	ROM (× 8-bit)	64 K
	RAM (× 8-bit)	2 K
	Minimum instruction execution time	0.10 μs (at 4.5 V to 5.5 V, 20 MHz)
		0.238 μs (at 4.5 V to 5.5 V, 8.39 MHz)
	Package	LQFP080-P-1414A