

RF TRANSFORMERS

Transformers for Wideband RF Applications



- RoHS-6 peak reflow temperature rating: 245°C
- Miniature surface mount package
- Various impedance ratios available
- Excellent insertion loss
- Ideal for Balanced-to-Unbalanced applications
- Products from 0.05 to 1900 MHz bandwidth

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

RoHS-6 Compliant Part Number	Impedance Ratio ¹ Pri:Sec	Turns Ratio Pri:Sec (±2%)	Bandwidth ^{2,3} (MHz TYP)			Insertion Loss @ Midband (dB TYP)	Schematic	Primary Pins
			3 dB	2 dB	1 dB			
CX2041NLT	1:1CT	1:1CT	0.05–450	0.75–300	0.10–200	0.60	B	4–6
CX2040LNL	1:1	1:1	1.5–500	2.5–400	5–350	0.90	A	4–6
CX2043LNL	1.5:1	√1.5:1	—	—	1–1000	0.20	D	3–6
CX2044LNL	1.5:1	√1.5:1	—	1.0–500	5–100	0.20	A	1–3
CX2045LNL	1:2CT	1:1.414CT	—	—	3–300	0.80	B	4–6
CX2047LNL	1:4CT	1:2CT	—	0.5–300	1.5–100	0.24	B	4–6
CX2049LNL	1:8CT	1:2.83CT	.25–500	0.3–400	0.5–200	1.16	B	4–6
CX2029LNL	36:1CT	6:1CT	0.05–21	—	—	0.40	B	4–6
CX2163LNL	1:1	1:1	800–1900	—	900–1400	1.50	E	1–3

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C


RoHS-6 Compliant Part Number	Impedance Ratio ¹ Pri:Sec	Bandwidth ^{2,3} (MHz TYP)		Schematic	Primary Pins
		2 dB	1 dB		
CX2038LNL	75 Ω:75 Ω	Up to 1500	4.5–000	C	4–6
CX2039LNL	50 Ω:50 Ω	Up to 1500	4.5–1000	C	4–6

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number, e.g. CX2041NLT, CX2163NLT.

Mechanical


Schematic

RACKET-LITE

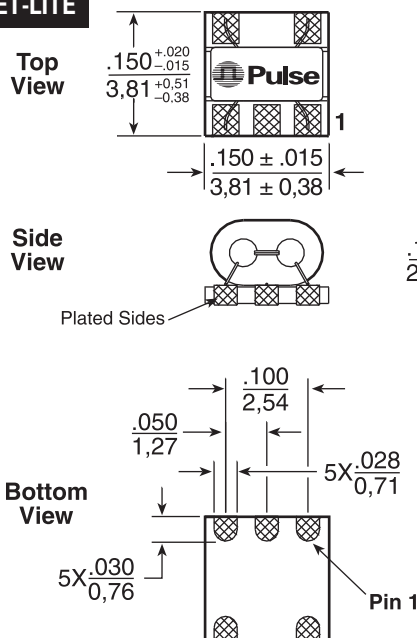


Tape & Reel 2000 /reel
 Tray 100 /tray
 Power Rating30 mA MAX; 0.25 W MAX

Dimensions: Inches
 mm
 Unless otherwise specified, all tolerances are ± .010
 0.25

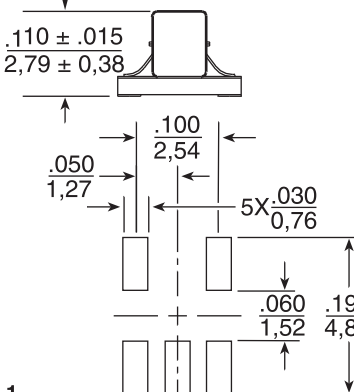

SUGGESTED PAD LAYOUT

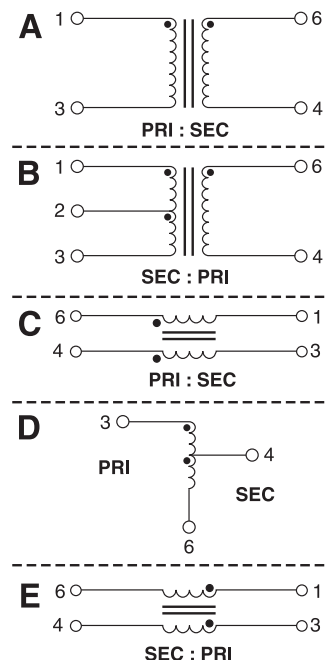

RF TRANSFORMERS

Transformers for Wideband RF Applications









Notes from Tables

1. Impedance and turns ratios are specified primary:secondary.
(CT=Center Tap).
2. Bandwidth is referenced to midband loss.
3. These transformers are verified to operate from -40°C to +85°C.
Contact Pulse Applications Engineering for performance data.

Application Notes

- A. Bandwidth specifications for **CX2040LNL** and **CX2047LNL** are for a 50 Ω system.
- B. Materials used in the products are UL94-V0 recognized. Products meet requirements of IEC 695-2-2 (Needle Flame Test).
- C. **CX2038LNL**, **CX2039LNL**, and **CX2043LNL** transformer configurations do not provide DC isolation between primary and secondary windings.
- D. For additional impedance ratios and frequency ranges, please contact Pulse Applications Engineering.
- E. Pick and place operation: smooth upper surface of device allows automatic pick and place.
- F. For availability of lead-free version of this product, please contact Pulse.

Typical Insertion Loss @ 25°C

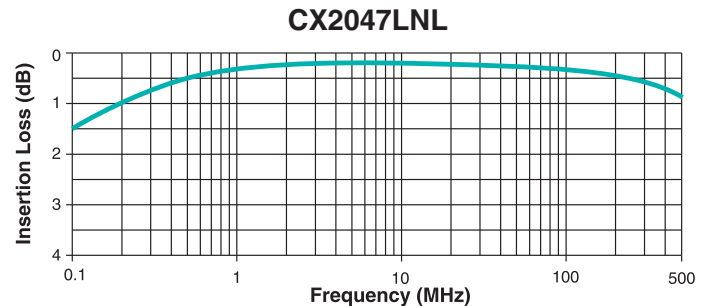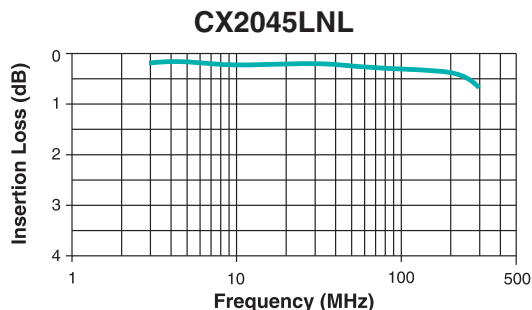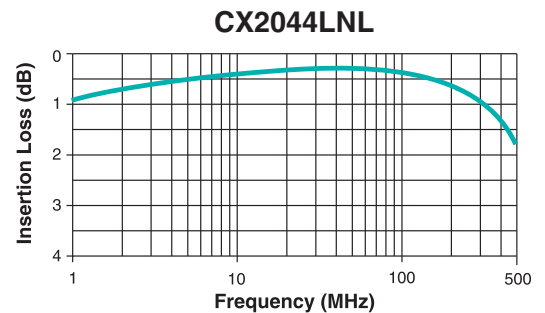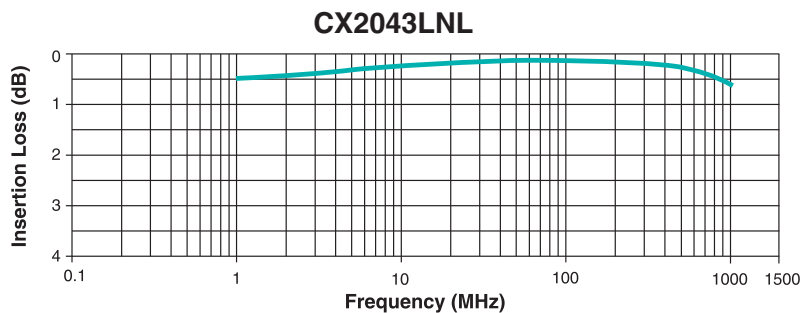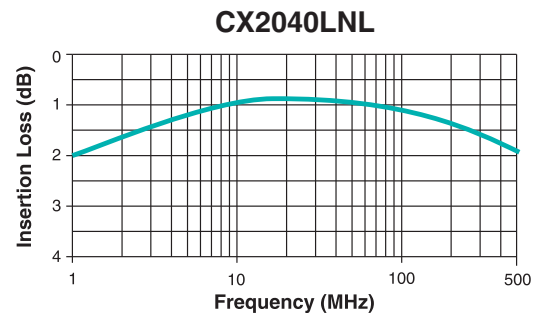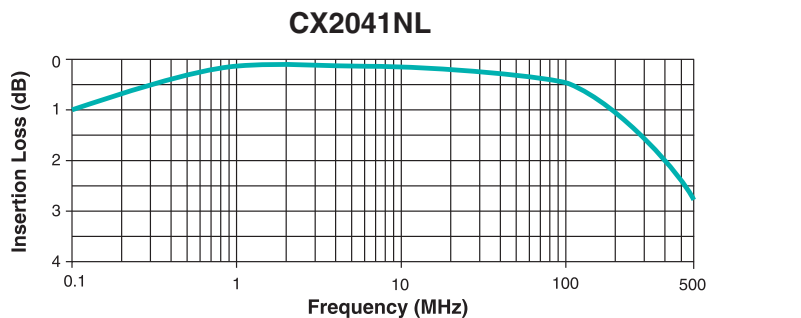


RF TRANSFORMERS

Transformers for Wideband RF Applications




Typical Insertion Loss @ 25°C


CX2029NL

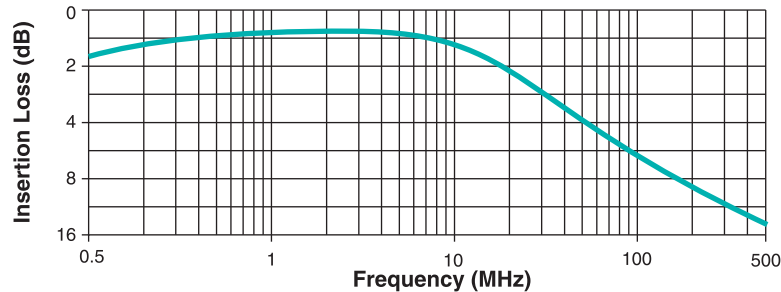

CX2038LNL

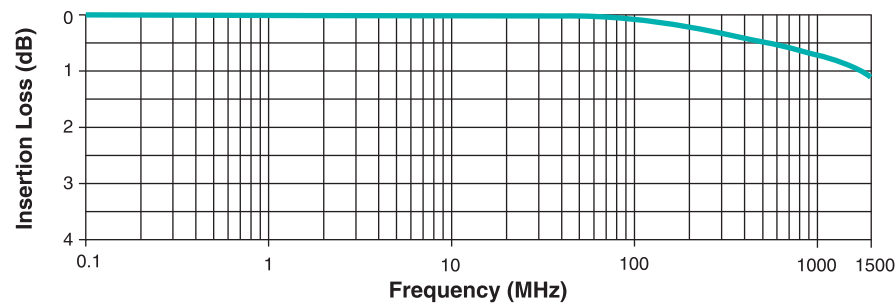

CX2039LNL

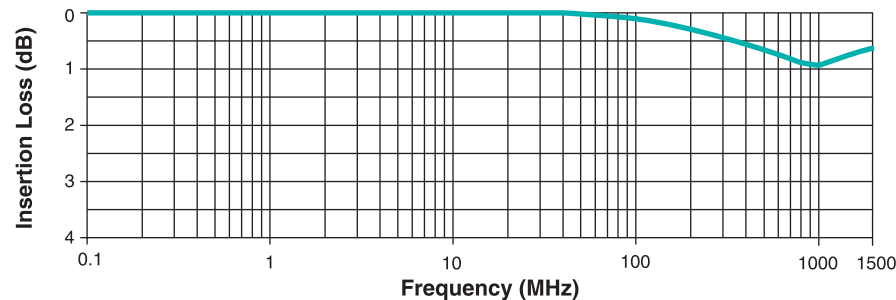

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100

Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0

Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, R. O. China 518057

TEL: 86 755 33966678

FAX: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Tel: 86 21 54643211/2

Fax: 86 21 54643210

Pulse South Asia

135 Joo Seng Rd.
#03-02
PM Industrial Bldg.
Singapore 368363

TEL: 65 6287 8998

FAX: 65 6280 0080

Pulse North Asia

No. 26, Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan
R. O. C.

Tel: 886 3 4643715

Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.