


# QLM Fan Vibration Sleeves



**Material:** TPE (Thermoplastic Elastomer) RoHS Compliant  
**Color:** Black  
**Hardness:** ca 70° Shore A  
**Fire Resistance:** UL94-V0

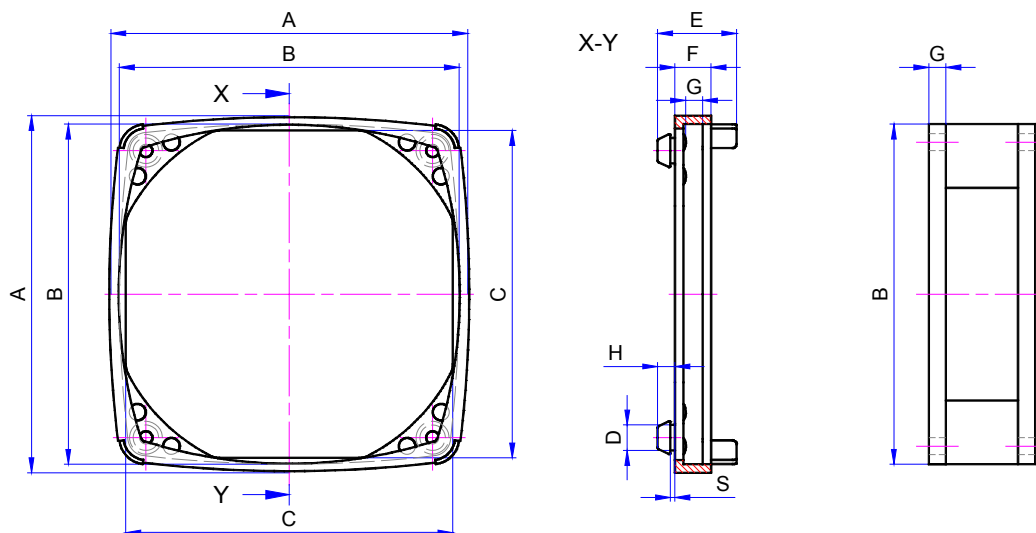

Ordering Information:

|            |            |                      |                                                                                      |
|------------|------------|----------------------|--------------------------------------------------------------------------------------|
| <b>QLM</b> | <b>40</b>  | <b>20</b>            | <b>10 or 20</b>                                                                      |
| Series     | Fan Size B | Fan Flange Thickness | 10 = panel thickness from 0.75 to 1.25mm<br>20 = panel thickness from 1.50 to 2.50mm |

**CUSTOM SIZES AVAILABLE BY REQUEST**

| Part Number   | A<br>Inch / mm | B<br>Inch / mm | C<br>Inch / mm | D<br>Inch / mm | E<br>Inch / mm | F<br>Inch / mm | G<br>Inch / mm | H<br>Inch / mm | S<br>Inch / mm | PANEL<br>THICKNESS<br>Inch / mm |
|---------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------------------|
| QLM-40-20-10  | 1.692 / 43     | 1.574 / 40     | 1.496 / 38     | .177 / 4.5     | .581 / 14.75   | .207 / 5.25    | .008 / 2.0     | .138 / 3.5     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-40-20-20  | 1.692 / 43     | 1.574 / 40     | 1.496 / 38     | .177 / 4.5     | .620 / 15.75   | .207 / 5.25    | .008 / 2.0     | .178 / 4.5     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-60-30-10  | 2.520 / 64     | 2.362 / 60     | 2.283 / 58     | .197 / 5.0     | .689 / 17.5    | .295 / 7.5     | .008 / 2.0     | .157 / 4.0     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-60-30-20  | 2.520 / 64     | 2.362 / 60     | 2.283 / 58     | .197 / 5.0     | .728 / 18.5    | .295 / 7.5     | .118 / 3.0     | .197 / 5.0     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-80-40-10  | 3.307 / 84     | 3.150 / 80     | 3.031 / 77     | .228 / 5.8     | .728 / 18.5    | .335 / 8.5     | .157 / 4.0     | .157 / 4.0     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-80-40-20  | 3.307 / 84     | 3.150 / 80     | 3.031 / 77     | .228 / 5.8     | .768 / 19.5    | .335 / 8.5     | .157 / 4.0     | .197 / 5.0     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-80-50-10  | 3.307 / 84     | 3.150 / 80     | 3.031 / 77     | .228 / 5.8     | .807 / 20.5    | .374 / 9.5     | .197 / 5.0     | .157 / 4.0     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-80-50-20  | 3.307 / 84     | 3.150 / 80     | 3.031 / 77     | .228 / 5.8     | .846 / 21.5    | .374 / 9.5     | .197 / 5.0     | .197 / 5.0     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-92-40-10  | 3.819 / 97     | 3.622 / 92     | 3.504 / 89     | .236 / 6.0     | .768 / 19.5    | .374 / 9.5     | .157 / 4.0     | .157 / 4.0     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-92-40-20  | 3.819 / 97     | 3.622 / 92     | 3.504 / 89     | .236 / 6.0     | .807 / 20.5    | .374 / 9.5     | .157 / 4.0     | .197 / 5.0     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-92-50-10  | 3.819 / 97     | 3.622 / 92     | 3.504 / 89     | .236 / 6.0     | .846 / 21.5    | .413 / 10.5    | .197 / 5.0     | .157 / 4.0     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-92-50-20  | 3.819 / 97     | 3.622 / 92     | 3.504 / 89     | .236 / 6.0     | .886 / 22.5    | .413 / 10.5    | .197 / 5.0     | .197 / 5.0     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-119-40-10 | 4.921 / 125    | 4.685 / 119    | 4.567 / 116    | .315 / 8.0     | .866 / 22.0    | .374 / 9.5     | .157 / 4.0     | .177 / 4.5     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-119-40-20 | 4.921 / 125    | 4.685 / 119    | 4.567 / 116    | .315 / 8.0     | .906 / 23.0    | .374 / 9.5     | .157 / 4.0     | .217 / 5.5     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-119-50-10 | 4.921 / 125    | 4.685 / 119    | 4.567 / 116    | .315 / 8.0     | .945 / 24.0    | .413 / 10.5    | .197 / 5.0     | .177 / 4.5     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-119-50-20 | 4.921 / 125    | 4.685 / 119    | 4.567 / 116    | .315 / 8.0     | .984 / 25.0    | .413 / 10.5    | .197 / 5.0     | .217 / 5.5     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |
| QLM-119-60-10 | 4.921 / 125    | 4.685 / 119    | 4.567 / 116    | .315 / 8.0     | 1.024 / 26.0   | .453 / 11.5    | .236 / 6.0     | .177 / 4.5     | .039 / 1.0     | .030 / .75 - .049 / 1.25        |
| QLM-119-60-20 | 4.921 / 125    | 4.685 / 119    | 4.567 / 116    | .315 / 8.0     | 1.063 / 27.0   | .453 / 11.5    | .236 / 6.0     | .217 / 5.5     | .079 / 2.0     | .059 / 1.5 - .098 / 2.5         |

7610 Jenther Drive,  
 Mentor, OH 44060  
 Phone: 1-440-951-3300  
 Fax: 1-440-951-7252

**Qualtek** Electronics Corporation

E-Mail: [mailbox@qualtekusa.com](mailto:mailbox@qualtekusa.com)  
 Web: [www.qualtekusa.com](http://www.qualtekusa.com)




Only one hole cut-out has to be used to install the sleeve on a mounting plate or housing wall.




First pull the sleeve over the flange of the fan, then place the four pegs on the holes **B** of the mounting plate and pull them through from the back side.



First place the four pegs through the 45° outbreak in the mounting plate and pull them out into the holes **C2**. Now put the fan into the sleeve and pull the corners over the flanges of the fan.



First pull the sleeve over the flange of the fan, then place the four pegs in the larger holes **C1** of the mounting plate and pull the pegs with a turn into the holes **C2**.



First pull the sleeve over the flange of the fan, then place the four pegs in the larger holes **C1** of the mounting plate and push the pegs down into the holes **C2**.



By adjusting the size D/W and the size of radius R the resistance to mount and remount the fan with sleeve can be altered.

### Mounting style / Hole cut-out 1

is preferable when there is limited space around the fan. Please note! You need space at the back side to pull out the pegs.

### Mounting style / Hole cut-out 2

is recommend, when the space around the fan allows to pull the sleeve over the fan flanges. You don't need access to the back side.

### Mounting style / Hole cut-out 3/4

are the quickest ways to attach the fans provided sufficient space is available to pull or turn the sleeve and fan.  
Access to the back side is not necessary.

**We are always available for consultation should you have any question regarding the appropriate mounting style / hole cut-out and mounting procedure.**

All dimensions in mm!