



Similar to image

### Technical data:

|                                                                     |     |          |
|---------------------------------------------------------------------|-----|----------|
| <b>Latching relay design</b>                                        |     | others   |
| <b>Number of NC contacts</b>                                        |     | 1        |
| <b>Mounting height</b>                                              | mm  | 90       |
| <b>Mounting depth</b>                                               | mm  | 70       |
| <b>type of voltage</b>                                              |     | AC       |
| <b>Type of mounting</b>                                             |     | DIN rail |
| <b>Type of voltage</b>                                              |     |          |
| • [nicht versorgt - der Steuerspannung_1]                           |     | AC       |
| • [nicht versorgt - der Steuerspannung_2]                           |     | AC       |
| <b>Number of change-over switches</b>                               |     | 0        |
| <b>Number of NO contacts</b>                                        |     | 1        |
| <b>Number of pitch units for width</b>                              |     | 1        |
| <b>Product function / direct operation</b>                          |     | Yes      |
| <b>Breaking capacity current / nominal value</b>                    | A   | 16       |
| <b>Switching capacity apparent power</b>                            |     |          |
| • [nicht versorgt - bei Leuchtstofflampenlast Duo-Schaltung]        | V·A | 2,784    |
| • [nicht versorgt - bei Leuchtstofflampenlast unkomensiert]         | V·A | 1,160    |
| • [nicht versorgt - bei Leuchtstofflampenlast parallel kompensiert] | V·A | 1,299.2  |

|                                                                       |    |     |
|-----------------------------------------------------------------------|----|-----|
| <b>Switching capacity real power / for filament lamp load</b>         | W  | 16  |
| <b>Breaking capacity current / [nicht versorgt - bei cos phi 0,6]</b> | A  | 16  |
| <b>Control voltage frequency</b>                                      |    |     |
| • _1 / initial value                                                  | Hz | 50  |
| • _1 / final value                                                    | Hz | 50  |
| • initial value                                                       | Hz | 50  |
| • _2 / final value                                                    | Hz | 50  |
| <b>Control voltage/ _1</b>                                            |    |     |
| • _1 / initial value                                                  | V  | 230 |
| • final value                                                         | V  | 253 |
| • final value                                                         | V  | 253 |
| <b>supply voltage</b>                                                 |    |     |
| • minimum                                                             | V  | 250 |
| • maximum                                                             | V  | 250 |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5TT4105-0/all>


##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT4105-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4105-0)

##### Ausschreibungstexte (Leistungsverzeichnisse)

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

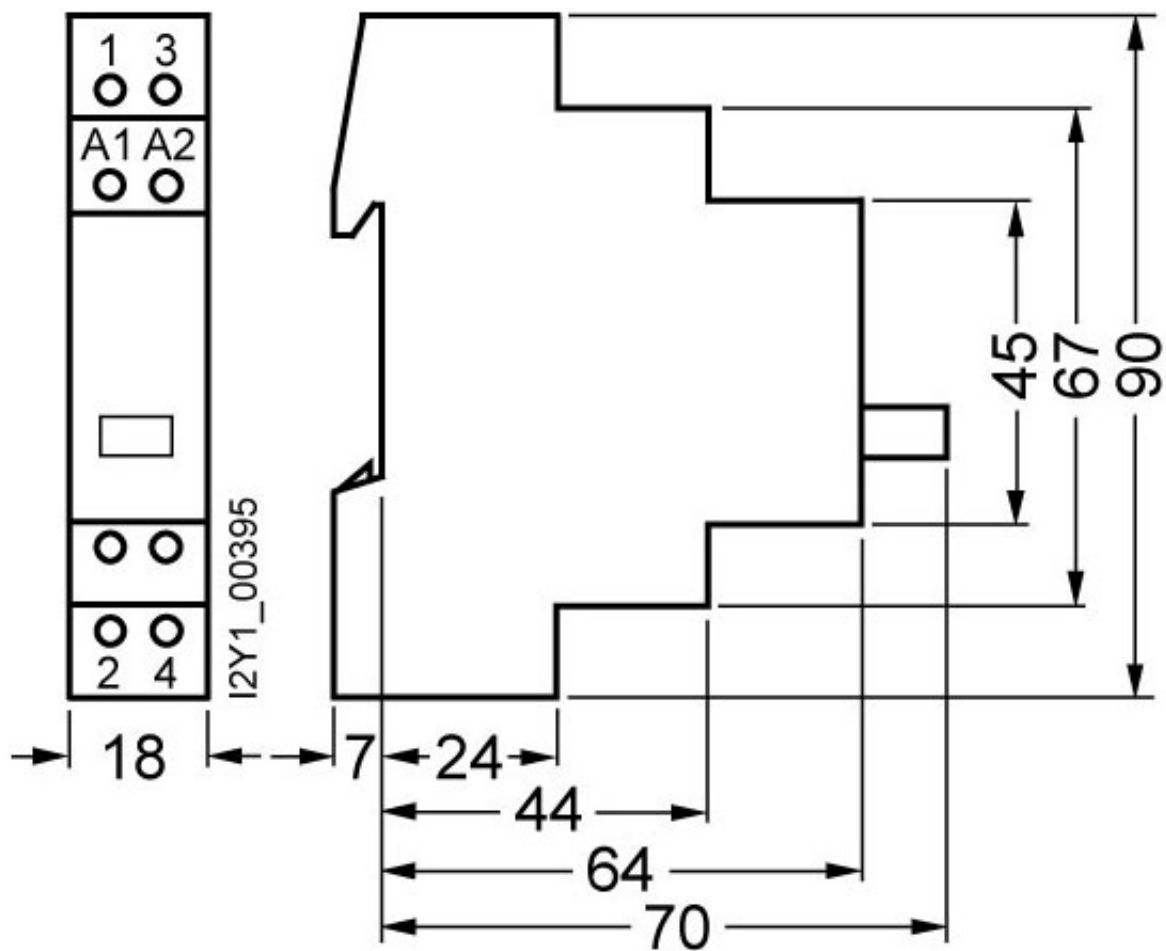

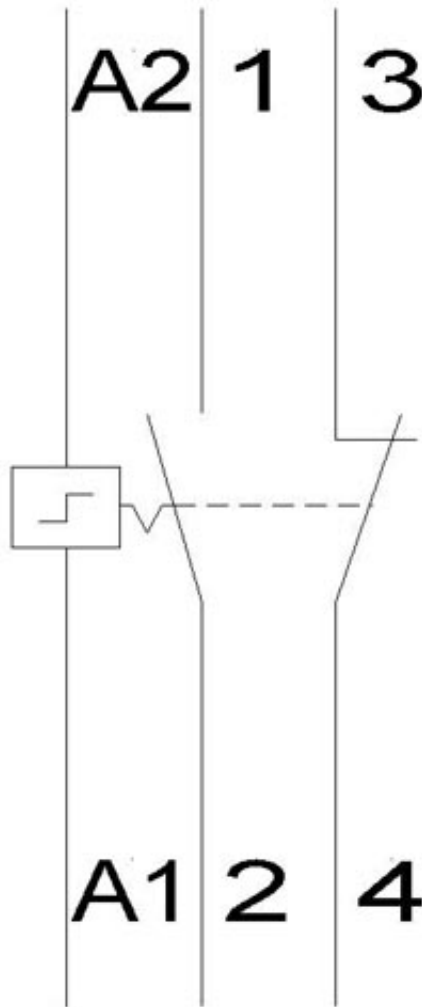

last change:

Dec 6, 2010