



MCY937 Series Octal Relays



MCY937-41

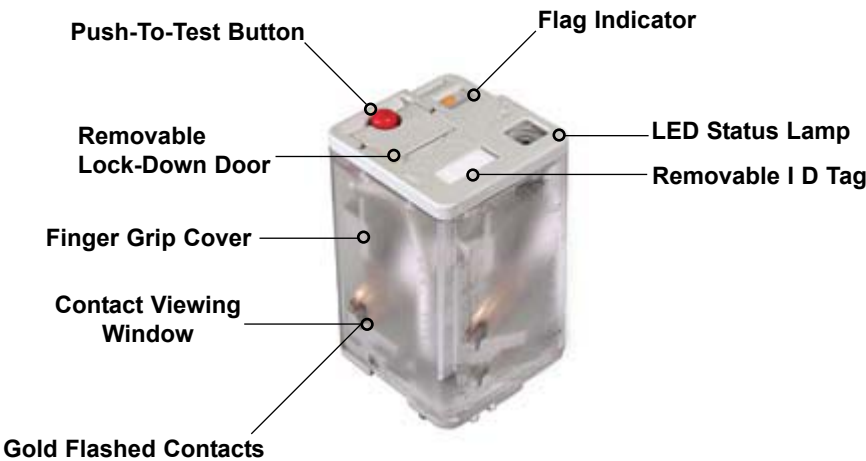

MCY937-43

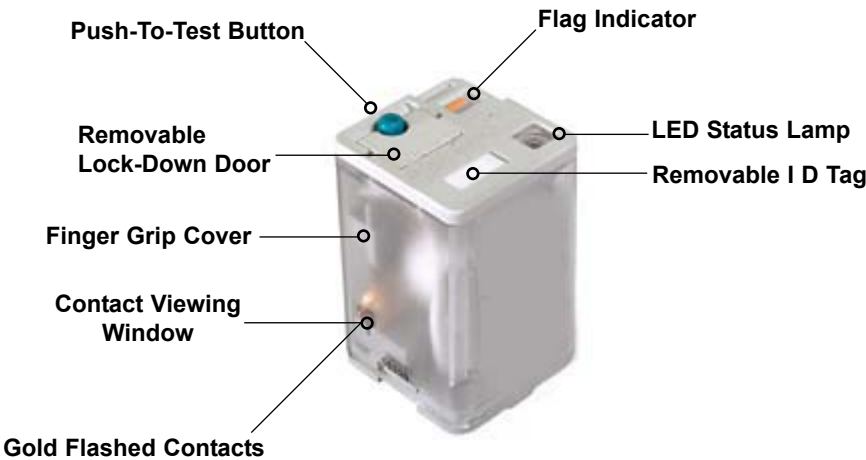

General Specifications

Contact Characteristics		Units	MCY937-41	MCY937-43
Number and Type of Contacts	-	-	3PDT	DPDT
Contact Material	-	-	Silver Alloy	
Thermal (Carrying) Current	-	A	16	
Maximum Switching Voltage	-	V	300	
Switching Current at Voltage	-	Resistive	16 A at 277 V 50 / 60 Hz	
	-	Resistive	16 A at 120 V 50 / 60 Hz	
	-	Resistive	16 A at 28 V	



MCY937 Series Octal Relays




General Specifications

Contact Characteristics		Units	MCY937-41	MCY937-43
Switching Current at Voltage	-	HP	1/3 at 120 V ac	
	-	HP	1/2 at 240 V ac	
	-	Pilot Duty	B300	
Current Rating with Magnetic Blowout - Code 69	-	A	-	3 at 150 V dc
Minimum Switching Requirement	-	mA	100 at 5 V dc (0.5 W)	
Coil Characteristics				
Operating Range	% of Nominal	-	85% to 110%	
	-	-	80% to 110%	
Average Consumption	-	VA	3	
	-	W	1.4	
Drop-out Voltage Threshold	-	-	15%	
	-	-	10%	
Performance Characteristics				
Electrical Life	Operations at Rated Current	(Resistive)	100,000	
Mechanical Life	Unpowered	-	5,000,000	
Operating Time (Response Time)	-	ms	20	
Dielectric Strength	Between Coil and Contact	V rms	1,500	
	Between Poles	V rms	1,500	
	Between Contacts	V rms	1,500	
Environment				
Ambient Air Temperature Around the Device	Storage	°C	-40 to +85	
	Operation	°C	-40 to +55	
Vibration Resistance	Operational	g-n	3, 10 - 55 Hz	
Shock Resistance	-	g-n	10	
Degree of Protection	-	-	IP 40	
Weight	-	g	89	

MCY937 Series Octal Relays




MCY937-41



NEMA
IEC

Wiring Diagram
Bottom View

MCY937-43







NEMA
IEC

Wiring Diagram
Bottom View

MCY937-41

Full Featured Dimensions

Plain Cover Dimensions


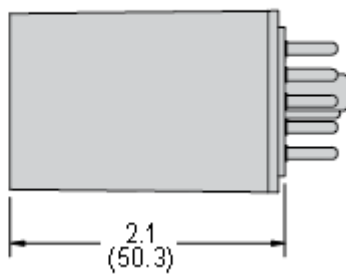

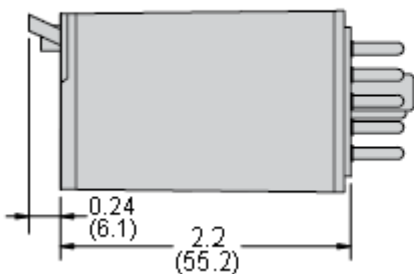


Dimensions : Inches (Millimetres)

MCY937-43

Full Featured Dimensions

Plain Cover Dimensions

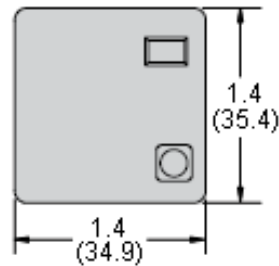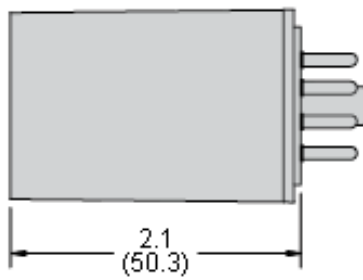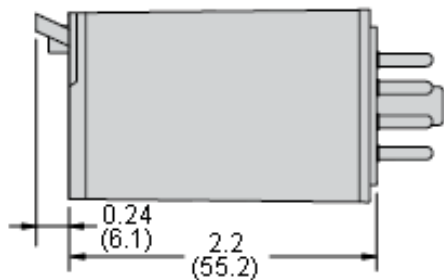

Dimensions : Inches (Millimetres)



MCY937 Series Octal Relays



MCY937-43



Full Featured



Plain Cover

MCY937-41



Full Featured



Plain Cover

Specification Table

Nominal Voltage	Coil Resistance	3PDT Part Number	3PDT Part Number	Pins
		(Full Feature) 16 Amperes	(Plain Cover) 16 Amperes	
AC Operated				
24 V ac 50 / 60 Hz	72 Ohms	MCY937-41R-24 A	MCY937-41C-24 A	11
120 V ac 50 / 60 Hz	1,700 Ohms	MCY937-41R-120 A	MCY937-41C-120 A	
240 V ac 50 / 60 Hz	7,200 Ohms	MCY937-41R-240 A	MCY937-41C-240 A	
DC Operated				
12 V dc	120 Ohms	MCY937-41R-12 D	MCY937-41C-12 D	11
24 V dc	470 Ohms	MCY937-41R-24 D	MCY937-41C-24 D	
110 V dc	10,000 Ohms	MCY937-41R-110 D	MCY937-41C-110 D	



MCY937 Series Octal Relays



Specification Table

Nominal Voltage	Coil Resistance	DPDT Part Number	DPDT Part Number	Pins
		(Full Feature) 16 Amperes	(Plain Cover) 16 Amperes	
AC Operated				
24 V ac 50 / 60 Hz	72 Ohms	MCY937-43R-24 A	MCY937-43C-24 A	8
120 V ac 50 / 60 Hz	1,700 Ohms	MCY937-43-120 A	-	
240 V ac 50 / 60 Hz	7,200 Ohms	MCY937-43R-240 A	MCY937-43C-240 A	
DC Operated				
12 V dc	120 Ohms	MCY937-43R-12 D	MCY937-43C-12 D	8
24 V dc	470 Ohms	MCY937-43-24 D	-	
110 V dc	10,000 Ohms	MCY937-43R-110 D	MCY937-43C-110 D	

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.