

3M™ Heel Grounder – Cup Style

Economy Heel Grounder

Cost effective but durable. A double life span, three layer sole, 18 inch multi-strand ribbon, and a low price make this grounder a good choice when high volume grounder use and turnover is costing too much. 3M uses time-tested construction techniques including computer controlled stitching, riveting, die cutting, and heat cutting to ensure consistent performance.

Standards

Meets the requirements of ANSI/ESD S-20.20, EIA 625, MIL-STD-1686, and MIL-HDBK-263.

Specifications


Resistor: 1 megohm
Color: Black
Ribbon: Multi-strand, carbon suffused nylon on polyester, sewn in sinusoidal pattern to provide side to side conductivity.
Hook and Loop: 3/4"
Sole Interior: Non-marking
Sole Exterior: <10⁵ ohms

Part Numbers

HGC1M-EC Economy Heel Grounder, 1 meg resistor

See 3M Data Sheets for these related items:

3M™ Foot Grounder Tester
3M™ Floor Mats

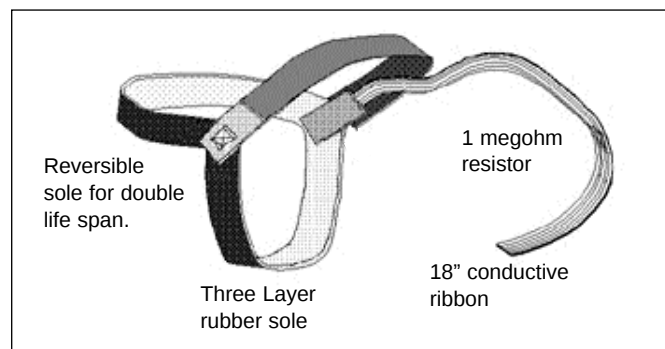

How Foot Grounders Work

Foot grounders discharge static from a person to ground by connecting the person to a grounded walking surface. A conductive ribbon placed inside the wearer's shoe or sock makes electrical contact with the skin through perspiration. The ribbon is joined to a resistor which limits current should accidental exposure to electricity occur. The other end of the resistor is joined to a conductive sole. This sole contacts a grounded ESD floor mat or ESD flooring system. Foot grounders must be worn on both feet to maintain ground contact while walking.

P R O D U C T D A T A S H E E T

Foot Grounder - Economy

PRODUCT
ECONOMY HEEL GROUNDER

ITEM NUMBER
SEE ABOVE

DATASHEET
1126-A

3M Electronic Solutions Division
6801 River Place Blvd.
Austin, TX 78726-9000
US and Canada: 866-722-3736
Fax: 866-722-3735
Intl: 919-718-0000; Fax: 919-774-8174
email: 3Mstaticinfo@mmm.com; www.3M.com/static

3M is a trademark of 3M Company.
All other trademarks herein are the property of their respective owners.

© 2008

